# ANNO TAPE S Indoor · Static White

## Features


- 4mm ultra-slim COB tape, perfect for tight spaces and gaps
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

## Applications


Under cabinets, coves, shelves, bedrooms, niches, closets, etc.


Date | Fixture type

Project name | Project phase



## Dimensions

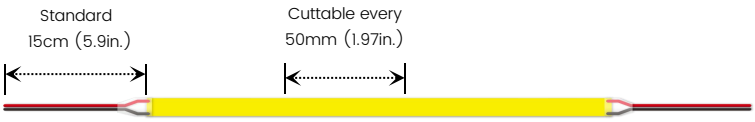


## Order Code (For LED tape)

| Series | Environment | Voltage | CCT | Power |
|---|---|---|---|---|
| **ANNOS** | **D2**-Dry (IP20) | **24V**-DC24V | **27K**-2700K<br>**30K**-3000K<br>**35K**-3500K<br>**40K**-4000K<br>**65K**-6500K | **050**-5W/M |

## Assembly Builder

| Left Feed Entry | | | |
|---|---|---|---|
| **F** | Front | **OW** | Open wire 15cm (5.9in.), 20 AWG |
| **C** | Closed | **MC** | Male connector with 20cm (0.66ft ) cable, 20 AWG |
| | | **FC** | Female connector with 20cm (0.66ft ) cable, 20 AWG |
| | | **NA** | Only for Closed Feed Entry |

## Assembly Builder

| Right Feed Entry | | | | Length | |
|---|---|---|---|---|---|
| **F** | Front | **OW** | Open wire 15cm (5.9in.), 20 AWG | **Max run** | 5m (16.4ft) |
| **C** | Closed | **MC** | Male connector with 20cm (0.66ft ) cable, 20 AWG | **Increment** | 50mm (1.97in.) |
| | | **FC** | Female connector with 20cm (0.66ft ) cable, 20 AWG | | |
| | | **NA** | Only for Closed Feed Entry | | |

## Extrusion Order Code

| Product Code | Colors | Lens | Lengths |
|---|---|---|---|
| Please select on the Extrusion Compatibility page | ■ **S** = Silver anodized<br>□ **W** = White lacquered<br>■ **B** = Black anodized | **OP** - Opal<br>**FR** - Frosted<br>**CL** - Clear | **1m** (3.28ft)<br>**2m** (6.56ft) |

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

## Lumen Output (lm/m)

| Temp./Color | 5W/M |
|---|---|
| 2700K | 480 |
| 3000K | 519 |
| 4000K | 575 |
| 6500K | 560 |
| Max. Run Length (M) | 5 |

*For customizations, please inquire.

| Technical Details | |
|---|---|
| Width | 4mm (0.16in. ) |
| LED Quantity | 480 LEDs/m (146 LEDs/ft) |
| Beam Angle | 150° |
| Efficacy | 115lm/W @4000K 5W |
| CRI | Ra≥90 |
| LED MacAdam | 3 steps |
| Average Life (L70) | > 54,000 hours |
| Max. Length Per Reel | 30m (98ft) |
| Storage Temperature | -25℃~ 60℃ |
| Ambient Temperature | -20℃~ 45℃ |

## Feed Entry Options

**F:** Front



**C:** Closed



## Connector Wire Options



**OW:** Open wire, **Dry only** Standard 15cm(0.59in.), 20 AWG (wire length customizable)



**MC:** Male connector, **Dry**, Standard 20cm(0.66ft ), 20 AWG



**FC:** Female connector, **Dry**, Standard 20cm(0.66ft), 20 AWG

# ANNO TAPE S Indoor · Static White

## Channel Compatibility

* Non-standard option, please contact us for customization support.


## Lens Type & Light Transmission

CL Clear FR Frosted OP Opal

## Surface

### BE078


CL 48% FR 44% OP 36%




## Corner

### BE09

CL 61% FR 55% OP 45%




## Connectors & Additional Accessories (Optional, purchase for extra)



**MC-2P-20**
Male SM connector with 20cm(0.66ft) cable, 2pin, IP20,Dry, 20AWG



**FC-2P-20**
Female SM connector with 20cm(0.66ft) cable, 2pin, IP20, Dry, 20AWG



**VHB**
VHB 3M adhesive back tape, stronger stickiness

# ANNO TAPE S Indoor · Static White

## Drivers

### Non-dimmable

| Code | Max Load | Input | Output | Environment | Size (L x W x H) |
|---|---|---|---|---|---|
| XLG-150-24-A | 150W | 100-305VAC | 24V | Dry/Damp/IP67 | 180 * 63 * 35.5 mm |
| LPV-150-24 | 150W | 180-305VAC | | Dry/Damp/IP67 | 148 * 40 * 30 mm |
| LRS-150-24 | 150W | 85-132VAC / 170-264VAC | | Dry | 99 * 97 * 30 mm |

### 3 in 1-dimmable


| Code | Max Load | Input | Output | Environment | Size (L x W x H) |
|---|---|---|---|---|---|
| ELG-150-24B-3Y | 150W | 100-305VAC | 24V | Dry/Damp/IP67 | 219 * 63 * 35.5 mm |
| PWM-120-24 | 120W | 90-305VAC | | Dry/Damp/IP67 | 191 * 63 * 37.5 mm |

### DALI-dimmable

| Code | Max Load | Input | Output | Environment | Size (L x W x H) |
|---|---|---|---|---|---|
| ELG-150-24DA-3Y | 150W | 100-305VAC | 24V | Dry/Damp/IP67 | 219 * 63 * 35.5 mm |

## Wiring Diagram

### Non-dimmable

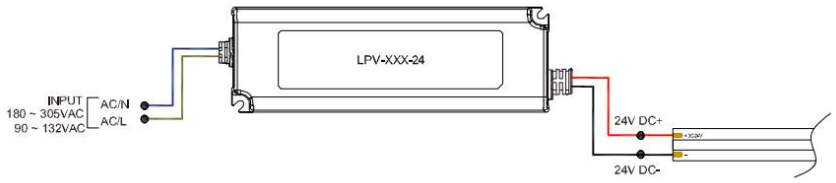


### 3 in 1-dimmable




### DALI-dimmable



# ANNO TAPE S Indoor · Static White

## 24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

| Total load | 8AWG | 10AWG | 12AWG | 14AWG | 16AWG | 18AWG | 20AWG | 22AWG |
|---|---|---|---|---|---|---|---|---|
| 10W / 0.4A | 484.0m | 304.5m | 191.4m | 120.4m | 75.5m | 47.5m | 29.8m | 18.5m |
| 20W / 0.8A | 242.0m | 152.1m | 95.7m | 60.0m | 37.8m | 23.7m | 14.9m | 9.1m |
| 30W / 1.3A | 161.2m | 101.5m | 63.7m | 39.9m | 24.9m | 15.8m | 9.7m | 6.1m |
| 40W / 1.7A | 121.0m | 75.9m | 47.8m | 29.8m | 18.9m | 11.8m | 7.3m | 4.5m |
| 50W / 2.1A | 96.6m | 60.6m | 38.1m | 24.0m | 14.9m | 9.4m | 5.7m | 3.6m |
| 60W / 2.5A | 80.4m | 50.6m | 31.7m | 19.8m | 12.5m | 7.9m | 4.8m | 3.0m |
| 70W / 2.9A | 68.8m | 43.2m | 27.1m | 17.0m | 10.6m | 6.7m | 4.2m | 2.4m |
| 80W / 3.3A | 60.3m | 37.8m | 23.7m | 14.9m | 9.4m | 5.7m | 3.6m | 2.1m |
| 90W / 3.8A | 53.6m | 33.8m | 21.0m | 13.1m | 8.2m | 5.1m | 3.0m | 1.8m |
| 100W / 4.2A | 48.1m | 30.1m | 18.9m | 11.8m | 7.3m | 4.5m | 2.7m | 1.8m |
| 110W / 4.6A | 43.8m | 27.4m | 17.3m | 10.6m | 6.7m | 4.2m | 2.7m | 1.5m |
| 120W / 5.0A | 40.2m | 25.3m | 15.8m | 9.7m | 6.1m | 3.9m | 2.4m | 1.5m |
| 130W / 5.4A | 37.1m | 23.1m | 14.6m | 9.1m | 5.7m | 3.6m | 2.1m | 1.2m |
| 140W / 5.8A | 34.4m | 21.6m | 13.4m | 8.5m | 5.1m | 3.3m | 2.1m | 1.2m |
| 150W / 6.3A | 32.0m | 20.1m | 12.5m | 7.9m | 4.8m | 3.0m | 1.8m | 1.2m |
| 160W / 6.7A | 30.1m | 18.9m | 11.8m | 7.3m | 4.5m | 2.7m | 1.8m | 0.9m |
| 170W / 7.1A | 28.3m | 17.6m | 10.9m | 7.0m | 4.2m | 2.7m | 1.5m | 0.9m |
| 180W / 7.5A | 26.8m | 16.7m | 10.3m | 6.7m | 3.9m | 2.4m | 1.5m | 0.9m |
| 190W / 7.9A | 25.3m | 15.8m | 10.0m | 6.0m | 3.9m | 2.4m | 1.5m | 0.9m |
| 200W / 8.3A | 24.0m | 14.9m | 9.4m | 5.7m | 3.6m | 2.1m | 1.2m | 0.9m |
| 210W / 8.8A | 22.8m | 14.3m | 8.8m | 5.4m | 3.3m | 2.1m | 1.2m | 0.6m |
| 220W / 9.2A | 21.9m | 13.7m | 8.5m | 5.4m | 3.3m | 2.1m | 1.2m | 0.6m |
| 230W / 9.6A | 21.0m | 13.1m | 8.2m | 5.1m | 3.0m | 1.8m | 1.2m | 0.6m |
| 240W / 10.0A | 20.1m | 12.5m | 7.9m | 4.8m | 3.0m | 1.8m | 1.2m | 0.6m |
| 250W / 10.4A | 19.2m | 12.1m | 7.6m | 4.5m | 2.7m | 1.8m | 0.9m | 0.6m |