AERO TAPE LONG RUN

Indoor · Static White

Features

- Long max run length up to 20m (65.6ft) from single power feed
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications


Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.

Date | Fixture type

Project name | Project phase



Dimensions

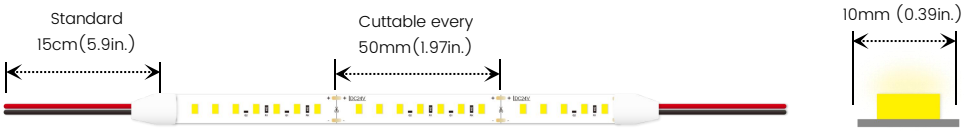

Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
AEROLR	**D2-**Dry (IP20)	**24V-**DC24V	**18K-**1800K **22K-**2200K **24K-**2400K **27K-**2700K **30K-**3000K **35K-**3500K **40K-**4000K **65K-**6500K	**050-**5W/M **100-**10W/M **150-**15W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG
C	Closed	**MC**	Male connector with 20cm (0.66ft) cable, 20 AWG
		FC	Female connector with 20cm (0.66ft) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG	**Increment**	50mm(1.97in.)
C	Closed	**MC**	Male connector with 20cm (0.66ft) cable, 20 AWG		
		FC	Female connector with 20cm (0.66ft) cable, 20 AWG		
		NA	Only for Closed Feed Entry		

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	■ **S** = Silver anodized □ **W** = White lacquered ■ **B** = Black anodized	**OP** - Opal **FR** - Frosted **CL** - Clear	**1m**(3.28ft) **2m** (6.56ft)

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/m)

CCT	5W/M	10W/M	15W/M
1800K	425	838	1251
2200K	441	869	1297
2400K	457	899	1342
2700K	482	951	1419
3000K	498	981	1464
3500K	503	991	1480
4000K	519	1022	1525
6500K	508	1002	1495
Max. Run Length (M)	20	15	11

Technical Details	
Width	10mm (0.39in.)
LED Quantity	140 LEDs/M(42 LEDs/ft)
Beam Angle	120°
Efficacy	102.2lm/W @4000K 10W
CRI	Ra≥90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	50m(164ft)
Storage Temperature	-25℃~ 60℃
Ambient Temperature	-20℃~ 45℃

Feed Entry Options

F: Front

C: Closed

Connector Wire Options

OW: Open wire, **Dry only**
Standard 15cm(0.59in.), 20 AWG
(wire length customizable)



MC: Male connector, **Dry**,
Standard 20cm(0.66ft), 20 AWG



FC: Female connector, **Dry**,
Standard 20cm(0.66ft), 20 AWG

AERO TAPE LONG RUN

Indoor · Static White

Channel Compatibility

* Non-standard option, please contact us for customization support.


Lens Type & Light Transmission

CL Clear FR Frosted OP Opal

Surface


BE1202

CL 65% FR 59% OP 48%




BE1205

CL 86% FR 79% OP 65%




BE1215

CL 55% FR 50% OP 41%




BE1302

CL 86% FR 79% OP 65%




BE1303

CL 68% FR 62% OP 51%




BE1415

CL 54% FR 49% OP 40%




BE1919

CL 78% FR 71% OP 58%



BE2020


CL 80 FR 73% OP 60%



Mud-In


BE5615

CL 60% FR 55% OP 45%



BE7615

CL 65% FR 59% OP 49%




AERO TAPE LONG RUN

Indoor · Static White

Recessed


BE1201

CL 63% FR 58% OP 47%




BE1204

CL 86% FR 78% OP 64%




BE1207

CL 62% FR 57% OP 47%




BE2015

CL 61% FR 55% OP 45%




BE5035

CL 56% FR 51% OP 42%



BE6575


CL 72% FR 66% OP 54%



Corner


BE1001

CL 89% FR 81% OP 66%




BE1002

CL 87% FR 80% OP 65%




BE1101

CL 60% FR 55% OP 45%



BE1203


CL 75% FR 68% OP 56%



Suspended


BE3535

CL 58% FR 53% OP 44%




BE5075

CL 65% FR 60% OP 49%



BE60

CL 89% FR 81% OP 66%




AERO TAPE LONG RUN

Indoor · Static White

Specialty


BE1806
Bendable surface mounted

CL 91% FR 83% OP 68%




BE2009
Coves

CL 58% FR 53% OP 43%




BE3511
Borderless Bi-Color Panel

CL 69% FR 63% OP 52%




BE4615
Borderless Inside Corner

CL 61% FR 55% OP 45%




BE5315
Borderless Outside Corner

CL 61% FR 56% OP 45%




BE6728
Staircase

CL 57% FR 52% OP 42%




BE7030
Cove Recessed Borderless

OP 62%



BE8833
Cove Recessed / Double-Layer Borderless

CL 60% FR 55% OP 45%



Connectors & Additional Accessories (Optional, purchase for extra)

N6012-STCN-2P-10
Strip to cable connector without wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STC-2P-10
Strip to cable connector with 15cm (5.91in.) wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STSJ-2P-10
Strip to strip jumper connector with 15cm(5.91in.) wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STDCB-2P-10
Strip to cable with black male & female connector, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STDCW-2P-10
Strip to cable with white male & female connector, for 10mm (0.39in.) tape, 2 pin,IP20

N6012-STS-2P-10
Strip to strip connector, for 10mm (0.39in.) tape, 2 pin,IP20



C6012-LC-2P-10
L-shaped corner connector, for 10mm (0.39in.) tape, 2 pin,IP20



C6012-RC-2P-10
R-shaped corner connector, for 10mm (0.39in.) tape, 2 pin,IP20



MC-2P-20
Male SM connector with 20cm(0.66ft) cable, 2pin, IP20, Dry, 20AWG



FC-2P-20
Female SM connector with 20cm(0.66ft) cable, 2pin, IP20, Dry, 20AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

AERO TAPE LONG RUN

Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
XLG-150-24-A	150W	100-305VAC	24V	Dry/Damp/IP67	180 * 63 * 35.5 mm
LPV-150-24	150W	180-305VAC		Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC / 170-264VAC		Dry	99 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
PWM-120-24	120W	90-305VAC		Dry/Damp/IP67	191 * 63 * 37.5 mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

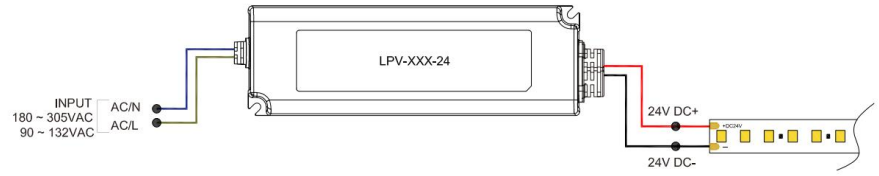

3 in 1-dimmable



DALI -dimmable

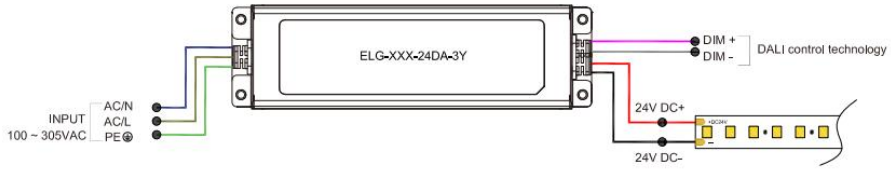

AERO TAPE LONG RUN

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m