AERO TAPE SAUNA

Static White

Features

- Heat resistant SMD tape, designed for saunas
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty

Date | Fixture type

Project name | Project phase

Applications

Saunas, hot springs, bathhouse, resorts, etc.



Dimensions



Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
AEROSN	**W5-**Wet (IP65)	**24V-**DC24V	**18K-**1800K **22K-**2200K **24K-**2400K **27K-**2700K **30K-**3000K **35K-**3500K **40K-**4000K **50K-**5000K **65K-**6500K	**048-**4.8W/M **096-**9.6W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG
C	Closed	**MC**	Male connector with 20cm (0.66ft) cable, 20 AWG
		FC	Female connector with 20cm (0.66ft) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG	**Increment**	50mm(1.97in.)
C	Closed	**MC**	Male connector with 20cm (0.66ft) cable, 20 AWG		
		FC	Female connector with 20cm (0.66ft) cable, 20 AWG		
		NA	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length

CCT	4.8W/M	9.6W/M
1800K	494	980
2200K	512	1015
2400K	530	1051
2700K	560	1111
3000K	585	1158
3500K	585	1159
4000K	603	1195
5000K	597	1183
6500K	591	1171
Max. Run Length (M)	7	5

Technical Details	
Width	12mm(0.47in.)
LED Quantity	120 LEDs/M(36 LEDs/ft)
Beam Angle	120°
Efficacy	124.5lm/W @4000K 9.6W
CRI	Ra≥80
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	5m(16.4ft)
Storage Temperature	-40℃~ 60℃
Ambient Temperature	-40℃~ 110℃

Feed Entry Options


F: Front



C: Closed

Connector Wire Options

OW: Open wire, **Dry only**
Standard 15cm (5.9in.), 20 AWG
(wire length made to order)



MC: Male connector, **Dry & Damp**,
Standard 20cm(0.66ft), 20 AWG



FC: Female connector, **Dry & Damp**, Standard 20cm(0.66ft), 20 AWG

AERO TAPE SAUNA

Static White

Connectors & Additional Accessories (Optional, purchase for extra)

CL-12-65
Mounting clip, for 12mm (0.47in.) tape, IP65

SEC-C-12-65
Closed silicone end cap, for 12mm (0.47in.) tape, IP65



MCW-2P-67
Male connector with 30cm(0.98ft) white cable, 2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector with 30cm(0.98ft) white cable, 2 pin, IP67, Wet, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
XLG-150-24-A	150W	100-305VAC	24V	Dry/Damp/IP67	180 * 63 * 35.5 mm
LPV-150-24	150W	180-305VAC		Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC / 170-264VAC		Dry	99 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
PWM-120-24	120W	90-305VAC		Dry/Damp/IP67	191 * 63 * 37.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

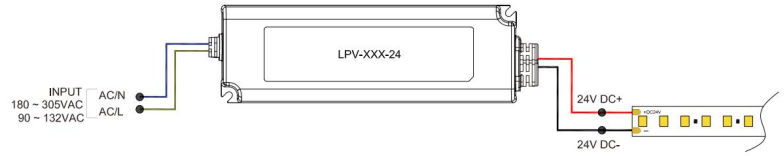

3 in 1-dimmable

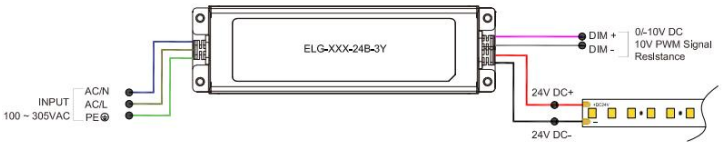

DALI-dimmable

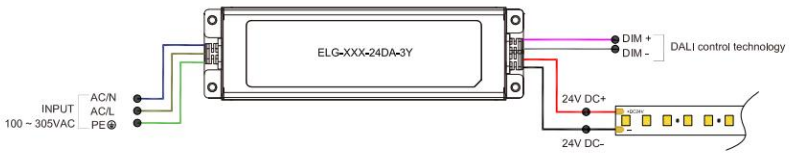

AERO TAPE SAUNA

Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m