AERO TAPE WAVE Indoor · Static White

Features

- Side bending SMD tape for curved applications
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Date | Fixture type


Project name | Project phase

Applications

Under cabinets, coves, shelves, backlighting, bedrooms, stairs, etc.



Dimensions

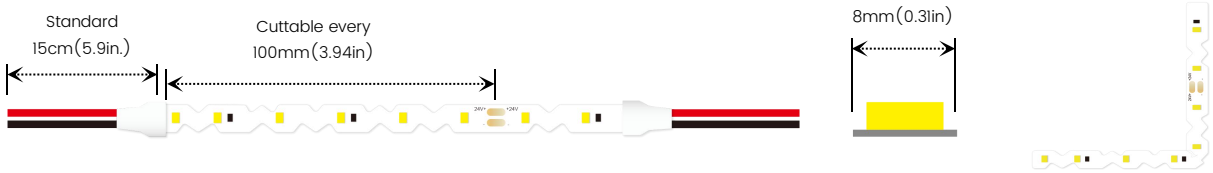

Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
AEROW	**D2-**Dry (IP20)	**24V-**DC24V	**18K-**2700K **22K-**3000K **24K-**4000K **27K-**6500K **30K-**3500K **35K-**3500K **40K-**4000K **65K-**6500K	**048-**4.8W/M **098-**9.8W/M **120-**12W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG
C	Closed	**MC**	Male connector with 20cm (0.66ft) cable, 20 AWG
		FC	Female connector with 20cm (0.66ft) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG	**Increment**	100mm(3.94in.)
C	Closed	**MC**	Male connector with 20cm (0.66ft) cable, 20 AWG		
		FC	Female connector with 20cm (0.66ft) cable, 20 AWG		
		NA	Only for Closed Feed Entry		

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	■ **S** = Silver anodized □ **W** = White lacquered ■ **B** = Black anodized	**OP** - Opal **FR** - Frosted **CL** - Clear	**1m** **2m**

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/m)

CCT	4.8W/M	9.8W/M	12W/M
1800K	374	756	921
2200K	388	783	954
2400K	402	811	988
2700K	425	857	1044
3000K	438	884	1078
3500K	443	894	1089
4000K	457	921	1123
6500K	448	903	1100
Max. Run Length (M)	8	6	5

Technical Details	
Width	8mm(0.3in.)
LED Quantity	60 LEDs/M(18 LEDs/ft)
Beam Angle	120°
Efficacy	94lm/W @4000K 9.8W
CRI	Ra≥90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	50m (164ft)
Storage Temperature	-25℃~ 60℃
Ambient Temperature	-25℃~ 45℃

AERO TAPE WAVE Indoor · Static White

Feed Entry Options

F: Front

C: Closed

Connector Wire Options

OW: Open wire, **Dry only**
Standard 15cm(0.59in.), 20 AWG (wire length customizable)



MC: Male connector, **Dry**
Standard 20cm(0.66ft), 20 AWG



FC: Female connector, **Dry** ,
Standard 20cm(0.66ft), 20 AWG

Channel Compatibility

* Non-standard option, please contact us for customization support.


Lens Type & Light Transmission

CL Clear FR Frosted OP Opal

Surface

BE1205


CL 83% FR 76% OP 62%



Mud-In


BE5615

CL 60% FR 55% OP 45%



BE7615


CL 72% FR 66% OP 54%



Recessed


BE1204

CL 84% FR 76% OP 63%




BE5035

CL 54% FR 50% OP 41%



BE6575

CL 65% FR 59% OP 48%




AERO TAPE WAVE Indoor · Static White

Corner

BE1002


CL 83% FR 76% OP 62%



Suspended


BE3535

CL 57% FR 52% OP 42%




BE5075

CL 61% FR 55% OP 45%



BE60

CL 86% FR 79% OP 64%




Specialty

BE6728

Staircase

CL 50% FR 46% OP 37%



Connectors & Additional Accessories (Optional, purchase for extra)

AERO TAPE WAVE Indoor · Static White

N6012-STCN-2P-10
Strip to cable connector without wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STC-2P-10
Strip to cable connector with 15cm (5.91in.) wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STSJ-2P-10
Strip to strip jumper connector with 15cm(5.91in.) wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STDCB-2P-10
Strip to cable with black male & female connector, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STDCW-2P-10
Strip to cable with white male & female connector, for 10mm (0.39in.) tape, 2 pin,IP20

N6012-STS-2P-10
Strip to strip connector, for 10mm (0.39in.) tape, 2 pin,IP20



C6012-LC-2P-10
L-shaped corner connector, for 10mm (0.39in.) tape, 2 pin,IP20



C6012-RC-2P-10
R-shaped corner connector, for 10mm (0.39in.) tape, 2 pin,IP20



MC-2P-20
Male SM connector with 20cm(0.66ft) cable, 2pin, IP20,Dry, 20AWG



FC-2P-20
Female SM connector with 20cm(0.66ft) cable, 2pin, IP20, Dry, 20AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

Drivers

Non-dimmable

AERO TAPE WAVE Indoor · Static White

Code	Max Load	Input	Output	Environment	Size (L x W x H)
XLG-150-24-A	150W	100-305VAC	24V	Dry/Damp/IP67	180 * 63 * 35.5 mm
LPV-150-24	150W	180-305VAC		Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC / 170-264VAC		Dry	99 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
PWM-120-24	120W	90-305VAC		Dry/Damp/IP67	191 * 63 * 37.5 mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

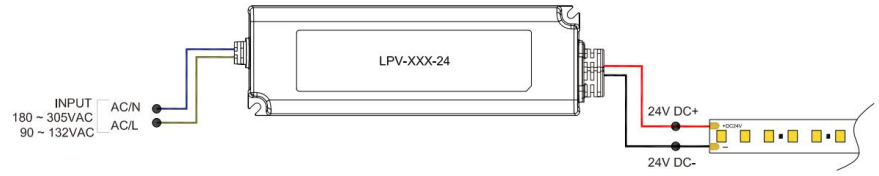

3 in 1-dimmable



DALI -dimmable

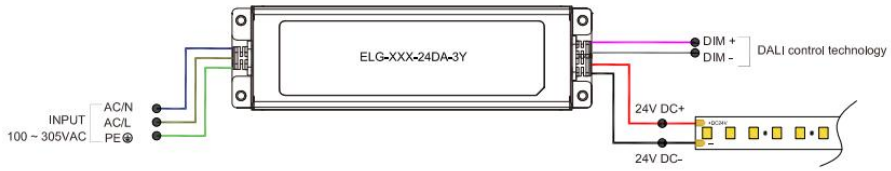

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

AERO TAPE WAVE Indoor · Static White

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m