AERO TAPE HD TW Indoor · Tunable White

Features

- High density LED, tunable white from 2700K to 6500K
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Date | Fixture type

Project name | Project phase

Applications

Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Dimensions



Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
AEROHD	**D2-**Dry (IP20)	**24V**-DC24V	**27K65K**-2700K+6500k	**240-**24W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 15cm (5.9in.), 20 AWG
C	Closed	**MC**	Male connector with 30cm (0.98ft) cable, 20 AWG
		FC	Female connector with 30cm (0.98ft) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 15cm (5.9in), 20 AWG	**Increment**	50mm (1.97in.)
C	Closed	**MC**	Male connector with 30cm (0.98ft) cable, 20 AWG		
		FC	Female connector with 30cm (0.98ft) cable, 20 AWG		
		NA	Only for Closed Feed Entry		

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	■ **S** = Silver anodized □ **W** = White lacquered ■ **B** = Black anodized	**OP** - Opal **FR** - Frosted **CL** - Clear	**1m** (3.28ft) **2m** (6.56ft)

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/m)

CCT	24W/M
2700K	1060
6500K	1142
2700K+6500K	2098
Max. Run Length (M)	5

Technical Details	
Width	10mm (0.39in.)
LED Quantity	240 LEDs/M (72 LEDs/ft)
Beam Angle	120°
Efficacy	87.4lm/W @2700K+6500K 24W
CRI	Ra≥90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	50m (164ft)
Storage Temperature	-25℃~ 60℃
Ambient Temperature	-25℃~ 45℃

Feed Entry Options

F: Front

C: Closed

Connector Wire Options

OW: Open wire, **Dry only**
Standard 15cm(0.59in.), 20 AWG (wire length customizable)



MC: Male connector, **Dry** ,
Standard 20cm(0.66ft), 20 AWG



FC: Female connector, **Dry**
Standard 20cm(0.66ft), 20 AWG

Channel Compatibility

Lens Type & Light Transmission

AERO TAPE HD TW

Indoor · Tunable White


* Non-standard option, please contact us for customization support.

CL Clear FR Frosted OP Opal

Surface


BE1202

CL 64% FR 58% OP 47%




BE1205

CL 85% FR 78% OP 64%




BE1215

CL 54% FR 50% OP 41%




BE1302

CL 83% FR 76% OP 62%




BE1303

CL 65% FR 59% OP 48%




BE1415

CL 55% FR 50% OP 41%




BE1919

CL 76% FR 70% OP 57%



BE2020


CL 78% FR 72% OP 59%



Mud-In


BE5615

CL 60% FR 54% OP 44%



BE7615

CL 72% FR 66% OP 54%




Recessed

BE1201	BE1204	BE1207	BE2015


AERO TAPE HD TW

Indoor · Tunable White


CL 62% FR 57% OP 46%




CL 83% FR 76% OP 62%



CL 63% FR 58% OP 47%




CL 61% FR 56% OP 46%




BE5035

CL 55% FR 50% OP 41%



BE6575


CL 65% FR 60% OP 49%



Corner


BE1002

CL 86% FR 79% OP 64%




BE1101

CL 60% FR 55% OP 45%



BE1203


CL 75% FR 69% OP 56%



Suspended


BE3535

CL 56% FR 51% OP 42%




BE5075

CL 64% FR 59% OP 48%



BE60

CL 88% FR 80% OP 65%



Specialty


BE1402	BE1403	BE1806	BE2009
Wall lighting		Bendable surface mounted	Coves

AERO TAPE HD TW


Indoor · Tunable White

Wall lighting


CL 73% FR 67% OP 55%




CL 77% FR 70% OP 57%



CL 90% FR 82% OP 67%




CL 57% FR 52% OP 43%



BE3511

Borderless Bi-Color Panel


CL 68% FR 62% OP 51%



BE4615

Borderless Inside Corner


CL 60% FR 55% OP 45%



BE5315

Borderless Outside Corner


CL 61% FR 55% OP 45%



BE6728

Staircase


CL 55% FR 50% OP 41%



BE6916

Recessed


CL 46% FR 42% OP 34%



BE7030

Cove Recessed Borderless


OP 61%



BE8833

Cove Recessed / Double-Layer Borderless


CL 59% FR 54% OP 44%



BE12017

Toekick


CL 49% FR 45% OP 37%



BE13350

Coves

CL 44% FR 40% OP 33%



Connectors & Additional Accessories (Optional, purchase for extra)

AERO TAPE HD TW Indoor · Tunable White

N6012-STCN-2P-10
Strip to cable connector without wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STC-2P-10
Strip to cable connector with 15cm (5.91in.) wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STSJ-2P-10
Strip to strip jumper connector with 15cm(5.91in.) wire, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STDCB-2P-10
Strip to cable with black male & female connector, for 10mm (0.39in.) tape, 2 pin,IP20



N6012-STDCW-2P-10
Strip to cable with white male & female connector, for 10mm (0.39in.) tape, 2 pin,IP20

N6012-STS-2P-10
Strip to strip connector, for 10mm (0.39in.) tape, 2 pin,IP20



C6012-LC-2P-10
L-shaped corner connector, for 10mm (0.39in.) tape, 2 pin,IP20



C6012-RC-2P-10
R-shaped corner connector, for 10mm (0.39in.) tape, 2 pin,IP20



MC-2P-20
Male SM connector with 20cm(0.66ft) cable, 2pin, IP20,Dry, 20AWG



FC-2P-20
Female SM connector with 20cm(0.66ft) cable, 2pin, IP20, Dry, 20AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

Drivers

Non-dimmable

AERO TAPE HD TW Indoor · Tunable White

Code	Max Load	Input	Output	Environment	Size (L x W x H)
XLG-150-24-A	150W	100-305VAC	24V	Dry/Damp/IP67	180 * 63 * 35.5 mm
LPV-150-24	150W	180-305VAC		Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC		Dry	99 * 97 * 30 mm

Dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2A2	100W	220-240VAC	24V	Dry	293 *43 *30mm
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LM-100-24-G2D2	100w	220-240VAC	24V	Dry	293 *43 *30mm

Contrillers Options


Type	Code	Description	Environment	Size (L *W *H)
Controllers	M2+M3-3A	3 channels output, Max. 3A current per channel, up to 216W output power	Indoor	135 * 30 * 20 mm

Wiring Diagram


Non-dimmable

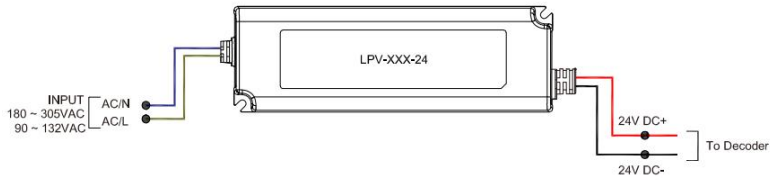

Dimmable

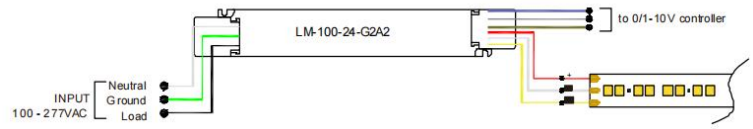

DALI-dimmable

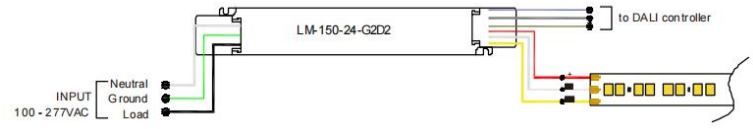

AERO TAPE HD TW Indoor · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m