Beamever
Designer's Custom Playground

LINIO NEON 1228X SV

INSTALLATION MANUAL

www.beameverusa.com
100 N Howard St Ste R, Spokane, WA, 99201-0508 USA

Beamever
Designer's Custom Playground

Before you start 1

Warning 1

Installing Neon 2

01 Installing with straight surface channel (LN1228-SC) 3

02 Installing with straight recessed channel (LN1228-RC) 4

03 Installing with bendable surface channel (LN1228-BC) 5

04 Installing with mounting clips (LN1228-CL) 6

Cutting Instruction 8

Installing End Cap 8

01 Silicone end cap 8

Wiring Diagram 10

Trouble Shooting 12

LINIO NEON 1228X SV

Installation Manual


Beamever
Designer's Custom Playground

ATTENTION: This product should be installed by a professional licensed electrician.




Before you start


1. Verify all product is accounted for and in good condition. If not, please contact information at the bottom.
2. Please check local electrical codes.
3. Turn power off before installing, and make sure to use properly rated wire.
4. Modifying or not following instructions will void the warranty for this product.
5. Please read the instructions entirely before starting installation.
6. For specifications that call for more intricate installations, please don't hesitate to contact us at info@beamever.com.

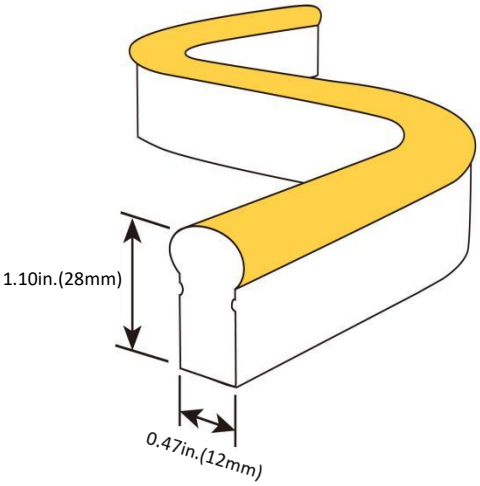

Warning

1. Please operate this product by instructions, and confirm the work voltage, it must be matched with product specifications.
2. Connect and cut this product correctly. Incorrect operations may damage this product.
3. Use qualified DC power supply.
4. The most suitable operation temperature shall be -40~113℉ (-40℃~45℃). DO NOT operate light when ambient temperature exceeds this range.
5. DO NOT energize the light over 30 minutes in coil packaging while the product is still coiled.
6. Avoid direct contact between the product and any paper materials to prevent sticking or surface damage.
7. The maximum bend diameter is 11.81in. (300mm). DO NOT overbend - it may cause product damage. Do not twist, drop, hang, drape the product in any way other than the intended approved installation. This product can only bend horizontally in relation to its light output.






Beamever Inc. · www.beameverusa.com · info@beamever.com


Specification subject to change without notice. Rev-2025-12-30

Installing Neon


- It is recommended that the installation be performed by at least 2 persons to ensure proper handling of the product and prevent damage to the electronic and housing construction.
- Please make sure to install the product into profile carefully and correctly. Taking out the product and re-assembling will most likely damage the product.
- Only use hands to install fixture into mounting clips or channels.
- Install the neon from one direction to avoid choking in the middle.
- Whenever possible, use your palm instead of your fingers to press the neon into the channel for more even pressure.
- The M12 connectors used with this product have a 15 mm outer diameter. Ensure all openings and conduits along the routing path accommodate this size before installation.
- If cutting is needed, please refer to the cutting instruction on page 8.

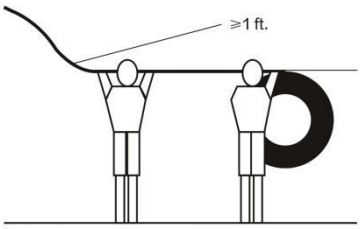


Two Person Installation

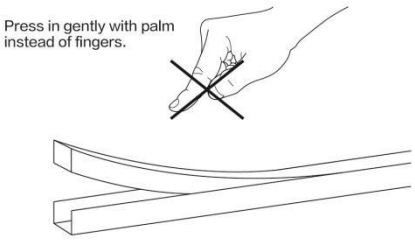


01 Installing with straight surface channel (LN1228-SC)

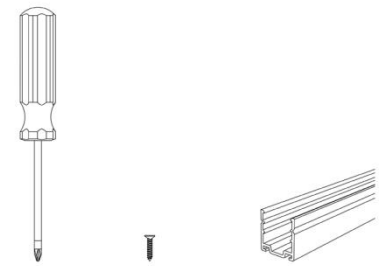


Step 1 Gather all necessary tools and materials.

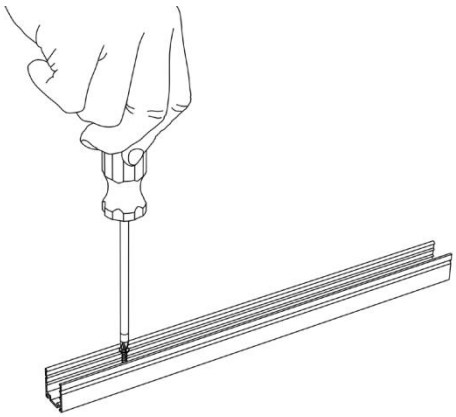


Step 1 Secure the channel to the installation surface using the provided screws.

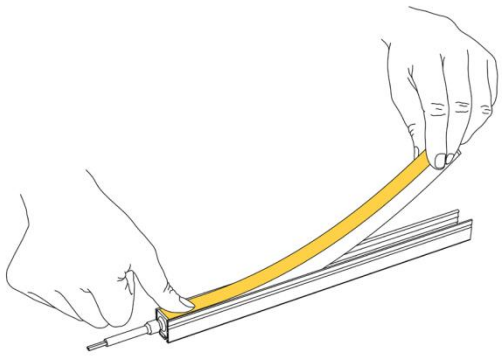

Step 2 Insert the wired end of the LED strip into the channel opening. Use your thumb to press and secure the beginning of the strip.

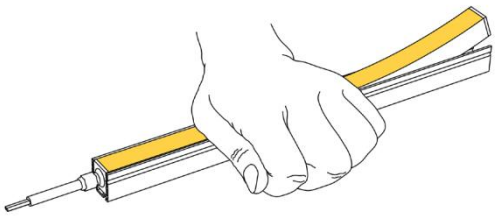


Step 3 With your palm, press the rest of the neon LED strip firmly and evenly into the channel.

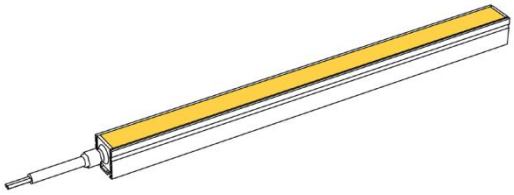


Step 4 Ensure the strip is seated flush and parallel within the channel for a clean, straight installation, as illustrated.

Beamever Inc. · www.beameverusa.com · info@beamever.com
Specification subject to change without notice. Rev-2025-12-30


02 Installing with straight recessed channel (LN1228-RC)

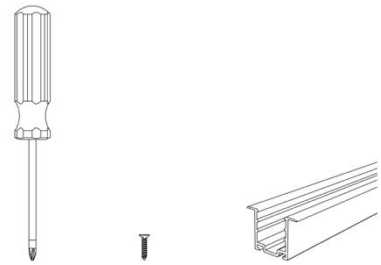


Step 1 Gather all required tools and materials.

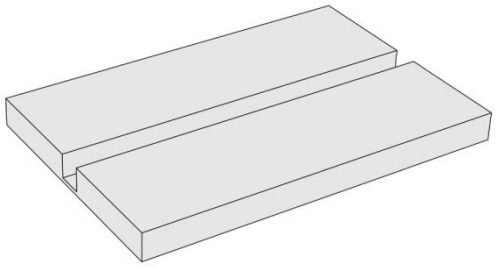


Step 2 Based on the channel's dimensions, cut a groove into the installation surface (e.g., wood panel, drywall).

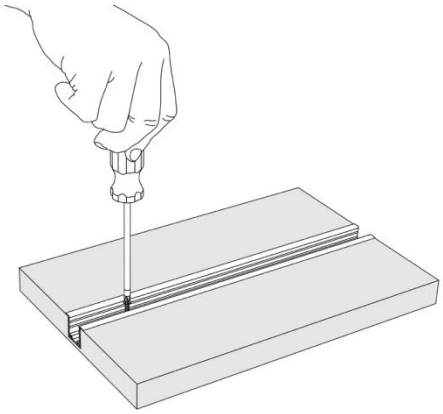


Step 3 Place the channel into the groove and secure it with screws.

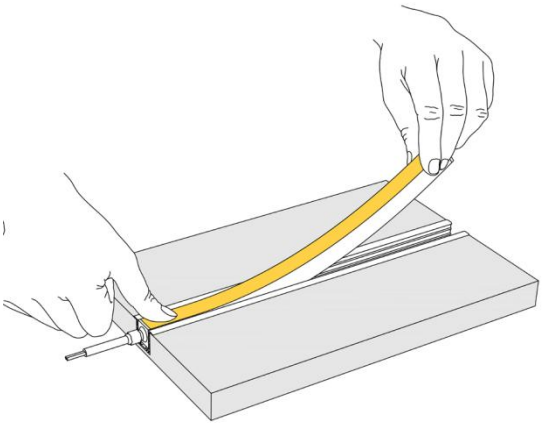

Step 4 Begin by inserting the wired end of the neon LED strip into the channel.

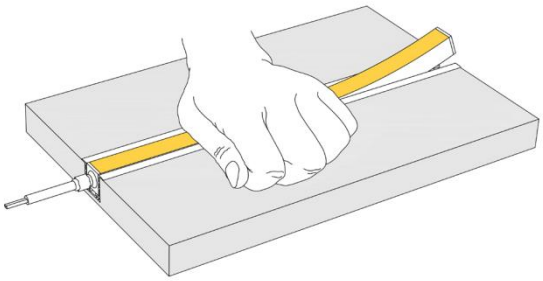


Step 5 Press the strip firmly and evenly along its entire length until it is fully seated within the channel.

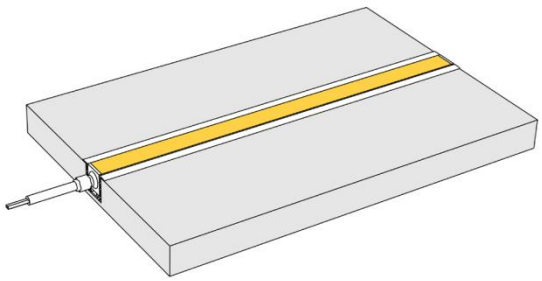


Step 6 Ensure the strip is flush with the surface for a clean, seamless look.


03 Installing with bendable surface channel (LN1228-BC)

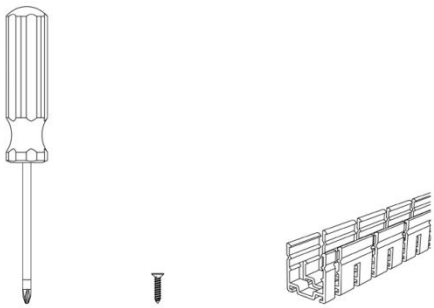


Step 1 Gather all required tools and materials.

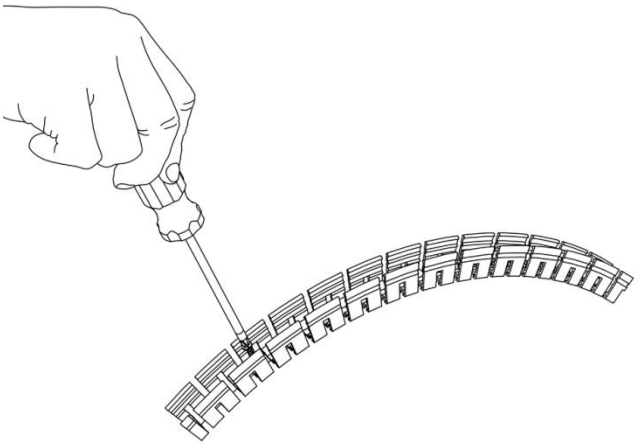

Step 2 Bend the flexible channel to match the contour of the installation surface. Secure it tightly against the surface using screws.

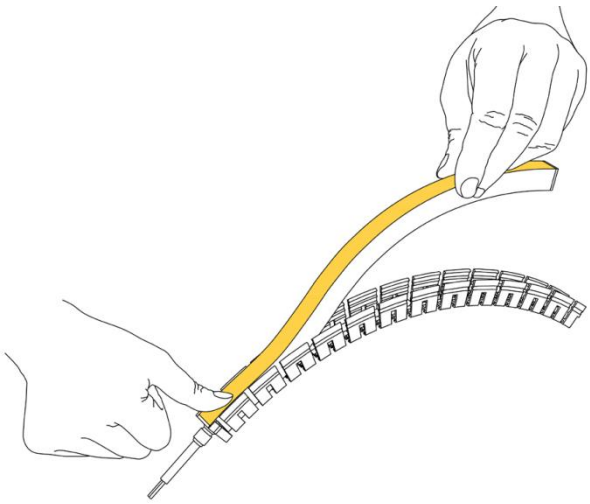


Step 3 Begin by inserting the wired end of the neon LED strip into the channel.

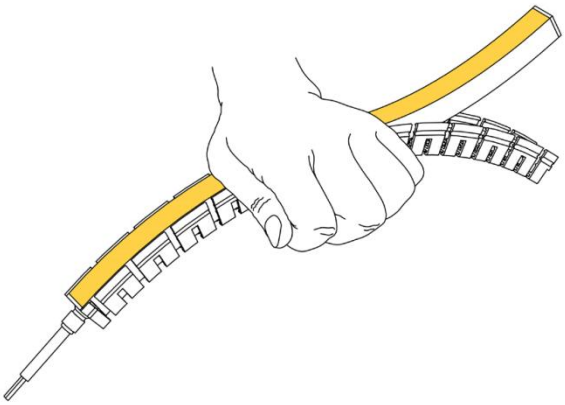

Step 4 Press the strip firmly and evenly along the curve until it is fully seated.


Beamever Inc. · www.beameverusa.com · info@beamever.com
Specification subject to change without notice. Rev-2025-12-30

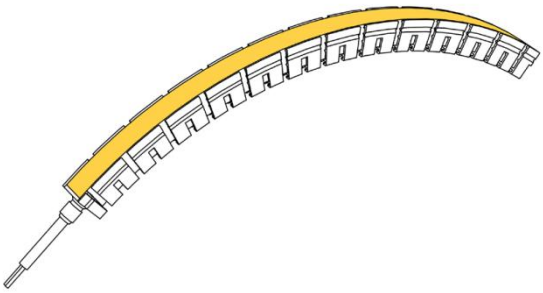


Note:
The min. bending diameter of LN1617-BC channel is 23.6in. (600mm).

Step 5 Ensure the strip is securely in place and follows the channel's curve for a smooth, continuous line of light.


04 Installing with mounting clips (LN1617-CL)

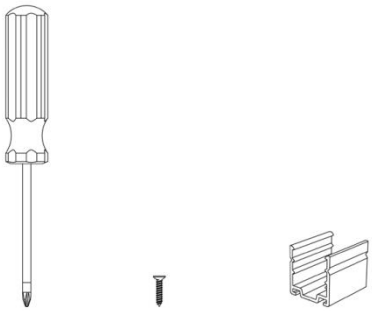


Step 1 Gather all required tools and materials.

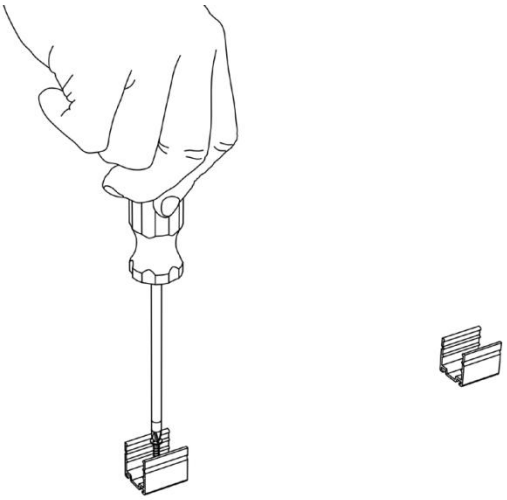


Step 2 Secure the mounting clips to the installation surface using screws, spaced at regular intervals of 300cm unless otherwise specified for the project.

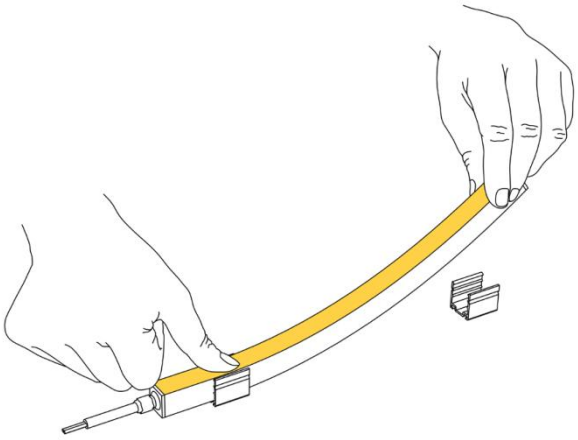

Step 3 Align the neon LED strip with the clips.

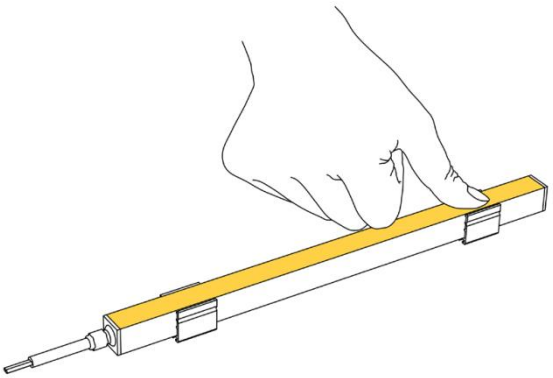

Step 4 Starting from one end, press the strip firmly until it snaps securely into each clip.

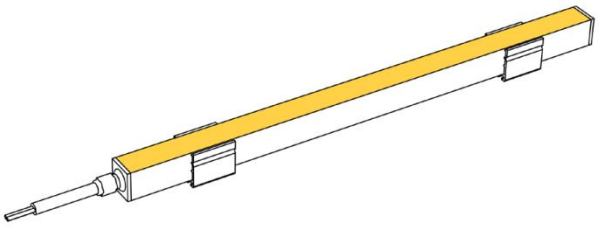


Step 5 Ensure the strip is straight and held securely by all clips for a professional finish.


Cutting Instruction

- Skip to "**Installing Neon**" if not cutting to specific length.
- Disconnect power at the source prior to attempting cutting.
- Use only factory-recommended cutter.
- Place the light horizontally when cutting it.

Step 6 Determine the desired location of the cut based on the cutting increments marked on the product, with cut marks facing upwards.

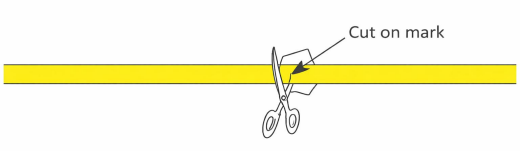


Step 7 Use factory-recommended cutter, gently cut straight down through the body of the product directly on the cutting increment mark. DO NOT cut diagonally or horizontally as this may damage the product.

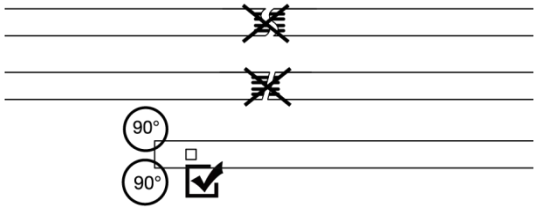


Installing End Cap


- Disconnect power at the source prior to attempting installation.
- All end caps must be connected correctly to achieve corresponding IP rating.
- Always select the correct end caps for the end of the light.
- NEVER wet the assembly units or assemble with wet hands.
- Do this operation at room temperature in a non-condensing environment.

01 Silicone end cap

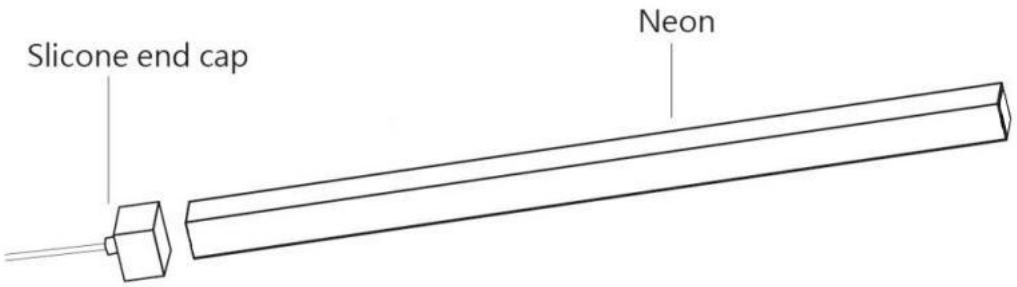

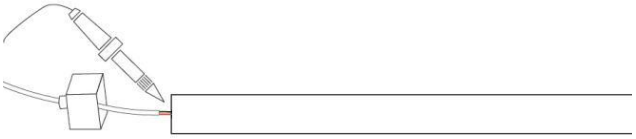


Step 1 Solder cable to the neon with solder iron. Make sure the "+" polarity is connected to the "+" polarity of the PCB.

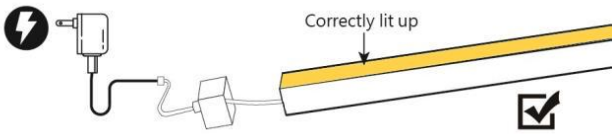

Step 2 Perform a quick light-up test. Proceed to the next step ONLY after the neon is lit up.



Step 3 Apply silicone glue to the neon.

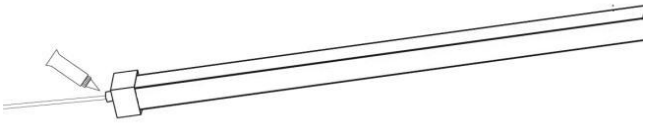


Step 4 Seal the neon with silicone end cap and push until seated. Apply silicone glue to the gap between neon and silicone end cap to tighten it.

Step 5 Set power on the strip again and gently bend the strip to ensure the strip is goo to be installed.

Wiring Diagram

- Disconnect power at the source prior to attempting installation.
- Use this product with appropriate 24V DC power supplies only. Unapproved power supplies may damage the product.
- Always observe proper polarity.
- Ensure to add 20% buffer when sizing power supply.
- Ensure that the power cable carried current is no greater than 80% of its capacity.
- To minimize the voltage drop and keep light consistency, position power supply nearest to the power feed end of the fixture and keep the power line as short as possible.
- Prior to installing 24V DC power supply, refer to the power supply installation instruction for more information.

Non Dimmable

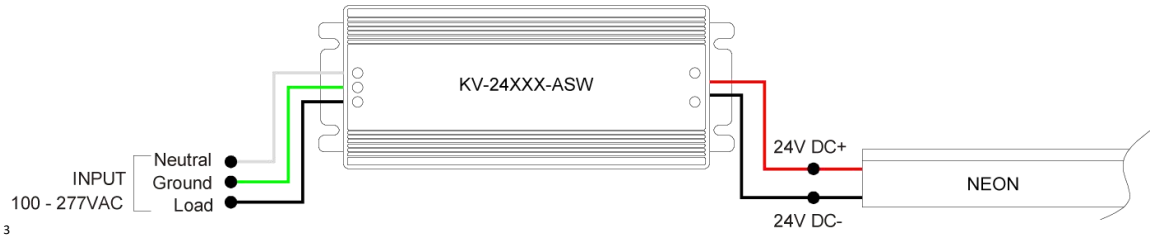


3

Phase cut/Triac-dimmable




4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

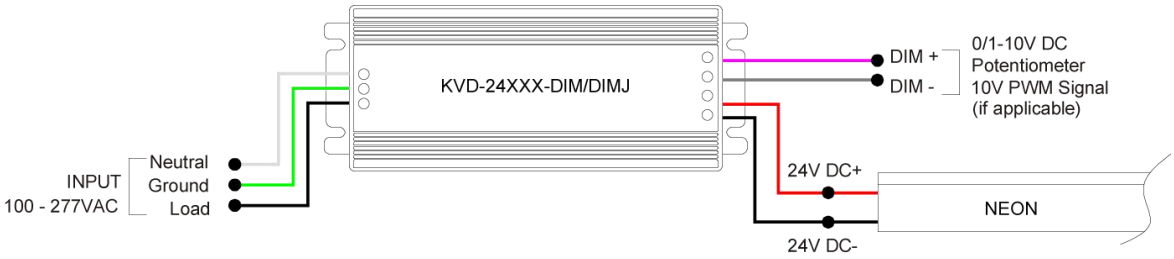


5 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



3 in 1 -dimmable

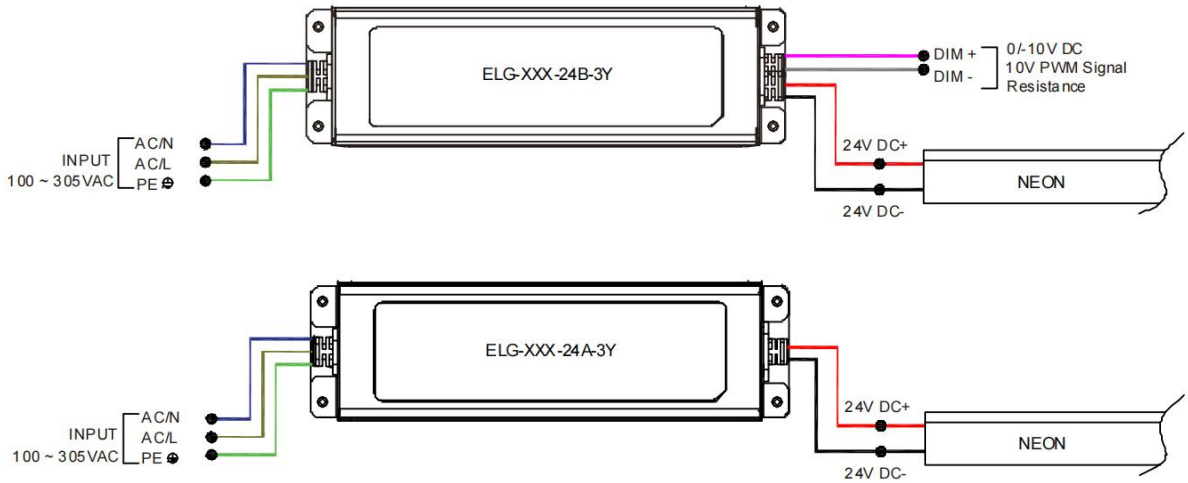

DALI-dimmable

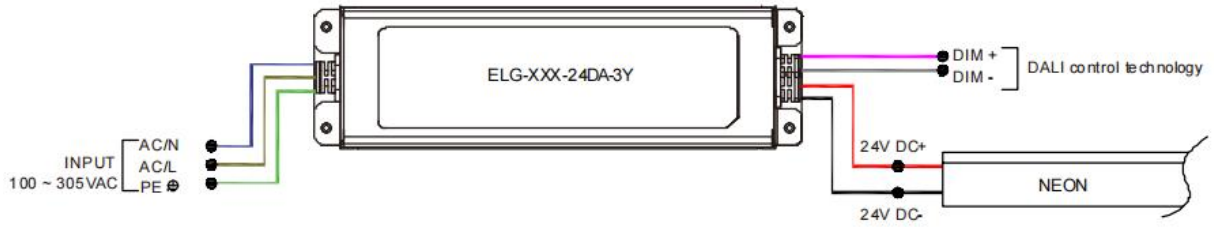

Trouble Shooting

01 The whole strip doesn't work.

- Check whether the power supply is plugged in, switched on and receiving power.
- Check whether the strip, decoders, controllers are connected to the power supply correctly.
- Check whether the polarity of all wire connections are connected correctly.
- Make sure power supply output voltage is 24V DC.
- Check whether the connector and end caps are inserted behind the PCB properly.

02 Light emitting appear dim or dull at one end.

- Check whether the power supply output voltage matches the strip's rated input voltage.
- Adjust the dimming level to the maximum.
- Use two-end feeding or split the installation into shorter electrical runs to avoid voltage drop.
- Check whether the strip is too far away from the power supply leading to voltage drop.

03 Light emitting appear excessive brightness.

- Check whether the output voltage of the power supply matches the rated voltage of the strip.
- Check whether the power grid is stable.

04 The first segment of the strip doesn't work.

- Check whether the strip is NOT cut on indicated cutting mark in a straight line.
- Check whether the strip was cut at the correct cutting mark. If cut incorrectly, discontinue installation and contact your supplier for replacement.
- Check whether the first LED was damaged during connector/end-cap installation. Do not attempt to re-seal or re-assemble on site. Contact your supplier for support.
- Check for possible water ingress caused by improper connector or end-cap installation. Replace the section only with a factory-sealed unit.
- Check for signs of external impact damage. Replace the affected section with a new factory-sealed unit.

05 Strip is flashing on and off.

- Check whether the wattage of the power supply supports the load of the entire length of the strip.
- Select the appropriate power supply wattage or install an additional power supply.
- Check whether the power supply output voltage is stable.
- Check whether the connector/end cap is properly installed with good contact with the copper PCB.
- Check whether proper controller is connected for light working.

Beamever

Designer's Custom Playground

Beamever Inc.

100 N Howard St Ste R.

Spokane, WA, 99201-0508 USA

info@beamever.com

www.beameverusa.com