Beamever

Designer's Custom Playground

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

Features

- UGR<19 creates soft lighting for ultimate eye comfort
- IP68 rated, ideal for outdoor uses, not for underwater project
- 5 years warranty


Date | Fixture type

Project name | Project phase


Applications

Hotels, offices, schools, libraries, clubs, lobbies, etc.






Bending Directions & Diameters




TV - Top View
(Vertical Bending)



SV - Side View
(Horizontal Bending)

Dimensions





Order Code

Model	Environment	Voltage	CCT	Power	End Cap
LN1617TVN **LN1617SVN**	**W8**-Wet (IP68)	**24V**-DC24V	**22K**-2200K **27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **53K**-5300K	**096**-9.6W/M **144**-14.4W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 300mm (11.81in.)
B	Bottom	**OA**	Open Wire with Anti-Wicking Ferrule
S	Side	**MC**	Male connector with 300mm (11.81in.) cable
C	Closed	**FC**	Female connector with 300mm (11.81in.)cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 300mm (11.81in.)
B	Bottom	**OA**	Open Wire with Anti-Wicking Ferrule
S	Side	**MC**	Male connector with 300mm (11.81in.) cable
C	Closed	**FC**	Female connector with 300mm (11.81in.)cable
		NA	Only for Closed Feed Entry

Length	
Max. nominal *For 9.6W/M	20m (65.6ft)
Max. nominal *For 14.4W/M	15m (49ft)
Increment	50mm(1.97in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

Lumen Output (lm/m)


CCT	Vertical Bending		Horizontal Bending	
	9.6W/M	14.4W/M	9.6W/M	14.4W/M
2200K	170	258	140	206
2700K	190	284	152	230
3000K	204	291	169	241
3500K	203	302	160	240
4000K	201	297	167	238
5300K	200	290	163	238
Max. Run Length(M)	20m (65.6ft)	15m (49ft)	20m (65.6ft)	15m (49ft)

Techinical Details

Parameter	Vertical Bending	Horizontal Bending
Efficacy	20.9lm/W @3000K 9.6W	17.3lm/W @3000K 9.6W
CRI	Ra≥90	Ra≥90
Beam Angle	72°	68°
LED MacAdam	2 steps	2 steps
IK Rating	IK10 (with aluminium profile)	/
Average Life (L80B10)	>51,000 hours	>51,000 hours
Storage Temperature	-40°C~ 65°C	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C	-40°C~ 65°C

Photometry


LN1617TVN-W8-24V-30K-096-FT-F-OW-F-OW
LINIO NEON 1617 TV NOX, Vertical bend, 3000K, 9.6W/M

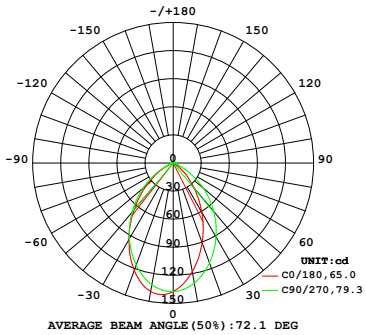

Zonal Lumen Summary

Zone	Lumen	% Fixture
0-30	91.98	45.1%
0-40	137.0	67.2%
0-60	191.7	94%
0-90	201.6	98.8%
0-180	204.0	100%

LN1617SVN-W8-24V-30K-096-FT-F-OW-F-OW
LINIO NEON 1617 SV NOX, Horizontal bend, 3000K, 9.6W/M

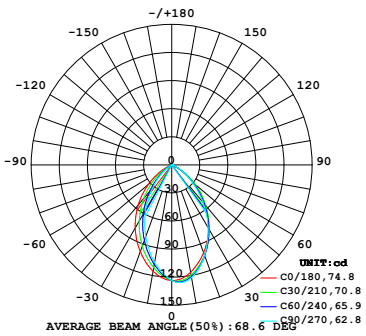

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	79.9	47.4%
0-40	117.7	69.8%
0-60	161.2	95.6%
0-90	167.1	99.1%
0-180	168.6	100.0%


LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending


Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

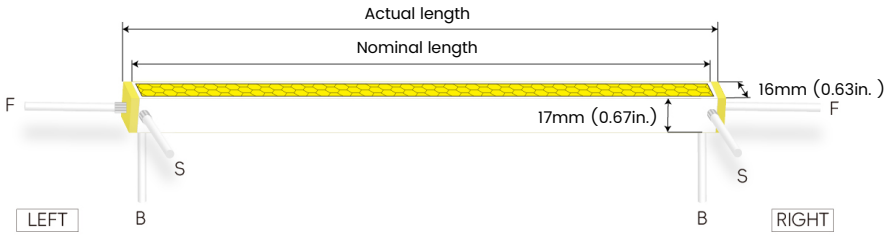





FO: Flush Opaque – IP68, factory-made only

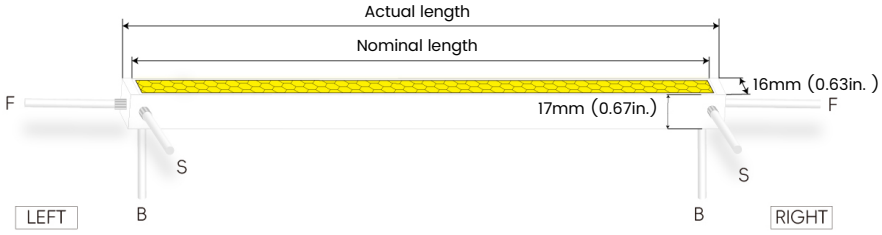





Silicone end cap – IP67, for field cuttable only

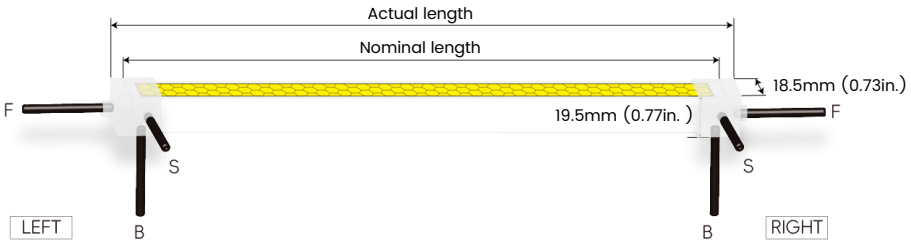



Mechanical end cap with screws – IP67, for field cuttable only

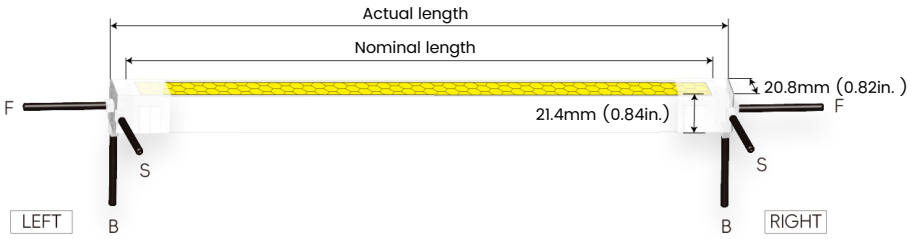





Connector Wire Options




OW: Open wire, **Dry only**
Standard 300mm (11.81in.),18 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 18 AWG



FC: Female connector, **Wet**
Standard 300mm (11.81in.), 18 AWG





OA: Open Wire with **Anti-Wicking Ferrule, Wet**
Standard 300mm (11.81in.),18 AWG,
Protects against water ingress through the power cable

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending



Mounting Options



NF1617-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BC


Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



NF1617-RC


Name	Straight recessed channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1617-MC


Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BMC



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Top Bending Diameter	600mm(23.6in.)
Min. Side Bending Diameter	1600mm(63in.)



NF1617-SCS



Name	Straight surface channel
Material	Aluminum with silicone groove
Standard Length	1m (3.28ft)



NF1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	1m (3.28ft)

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending



Mounting Options




NF1617-BPC


Name	Bendable surface channel
Material	Polycarbonate
Standard Length	1m (3.28ft)
Min. Bending Radius	150mm (5.91in.)



NF1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








NF1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)

* NF1617-LS must be installed with NF1617-SC









NF1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)

* NF1617-AC must be installed with NF1617-SC




NF1617-RC-SPC


Name	Spring clip
Standard Pkg	1pcs

* NF1617-RC-SPC must be installed with NF1617-RC


LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending


Silicone End Caps (Optional, purchase for extra)



NF1617-SEC-C
Silicone closed end cap



NF1617-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin




NF1617-SEC-S-2P
Silicone end cap side entry with 300mm (11.81in.) cable, 2 pin




NF1617-SEC-B-2P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 2 pin


Solderless & Glueless Mechanical End Caps for Vertical Bending(Optional, purchase for extra)




NF1617T-MEC-LF-2P
Mechanical end cap with screws, left front entry, 300mm (11.81in.) cable, 2 pin, IP67



NF1617T-MEC-RF-2P
Mechanical end cap with screws, right front entry, 300mm (11.81in.) cable, 2 pin, IP67



NF1617T-MEC-LS-2P
Mechanical end cap with screws, left side entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-RS-2P
Mechanical end cap with screws, right side entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-LB-2P
Mechanical end cap with screws, left bottom entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-RB-2P
Mechanical end cap with screws, right bottom entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-C
Mechanical closed end cap with screws, IP67



NF1617T-S-S-2P
Strip to strip connector, 2 pin, IP54



NF1617T-JC-F-2P
Jumper connector front entry, 150mm (5.9in.) cable, 2 pin, IP67



NF1617T-JC-S-2P
Jumper connector side entry, 150mm (5.9in.) cable, 2 pin, IP67




NF1617T-JC-B-2P
Jumper connector bottom entry, 150mm (5.9in.) cable, 2 pin, IP67


LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending


Solderless & Glueless Mechanical End Caps for Horizontal Bending(Optional, purchase for extra)




NF1617S-MEC-LF-2P
Mechanical end cap with screws,
left front entry,
300mm (11.81in.) cable, 2 pin, IP67



NF1617S-MEC-RF-2P
Mechanical end cap with screws,
right front entry,
300mm (11.81in.) cable, 2 pin, IP67



NF1617S-MEC-LS-2P
Mechanical end cap with screws,
left side entry,
300mm (11.81in.) cable, 2 pin, IP67




NF1617S-MEC-RS-2P
Mechanical end cap with screws,
right side entry,
300mm (11.81in.) cable, 2 pin, IP67




NF1617S-MEC-LB-2P
Mechanical end cap with screws,
left bottom entry,
300mm (11.81in.) cable, 2 pin, IP67




NF1617S-MEC-RB-2P
Mechanical end cap with screws,
right bottom entry,
300mm (11.81in.) cable, 2 pin, IP67




NF1617S-MEC-C
Mechanical closed end cap with
screws, IP67



NF1617S-S-S-2P
Strip to strip connector,
2 pin, IP54



NF1617S-JC-F-2P
Jumper connector front entry,
150mm (5.9in.) cable, 2 pin, IP67



NF1617S-JC-S-2P
Jumper connector side entry,
150mm (5.9in.) cable, 2 pin, IP67



NF1617S-JC-B-2P
Jumper connector bottom entry,
150mm (5.9in.) cable, 2 pin, IP67

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 18 AWG



FCW-2P-67
Female connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 18 AWG




MCB-2P-67
Male connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 18 AWG



FCB-2P-67
Female connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 18 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades



NF1617-IT
Installation tool for NF1617-BPC

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

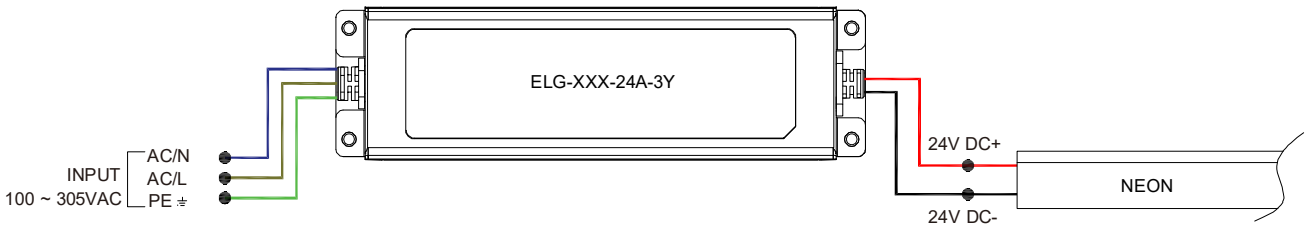

3 in 1-dimmable

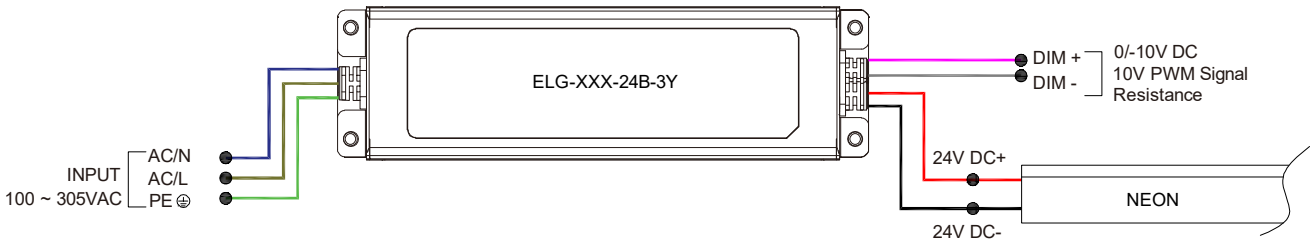

DALI-dimmable

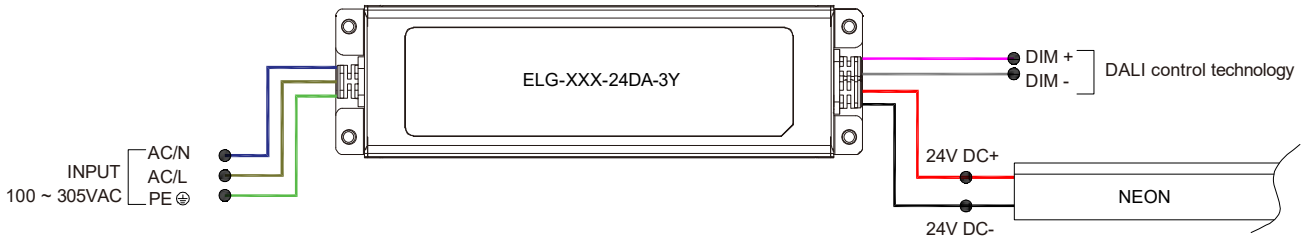

LINIO NEON 1617 NOX Static White

Outdoor · Vertical Bending · Horizontal Bending

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m