Beamever

Designer's Custom Playground

FORTE 3D LARGE PIXEL RGBW

Outdoor · 3D Bending · Pixel RGBW

Features

- 71mm addressable for fluid RGBW animations and media effects
- Multi-directional bending, no signal loss for media facades
- IP68 rated, ideal for outdoor uses, not for underwater project
- 3 years warranty

Date


Fixture type

Project name


Project phase

Applications

Architectural facades, building contours, landscape accents, bridges, walkways, transit hubs, staircases, and outdoor feature walls, etc.

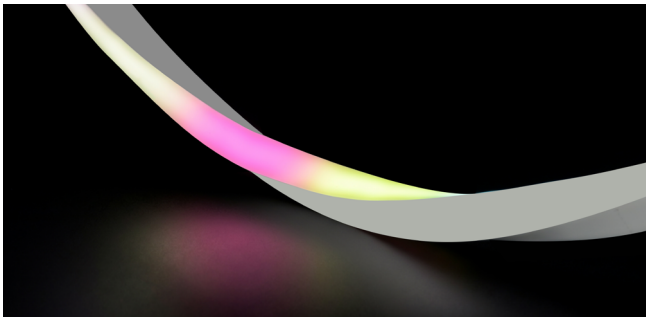

Bending Directions & Diameters

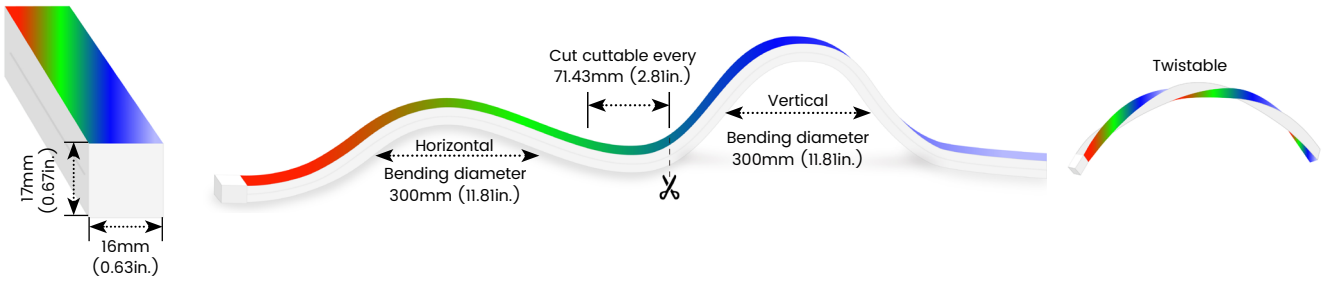

Order Code

Model	Environment	Voltage	CCT	Power	End Cap
F3DL	**W8**-Wet (IP68)	**24V**-DC24V	**PRGBW27K**-Pixel RGBW2700K **PRGBW30K**-Pixel RGBW3000K **PRGBW40K**-Pixel RGBW4000K	**150**-15W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry	
F Front	**OW** Open wire 300mm (11.81in.)
B Bottom	**OA** Open Wire with Anti-Wicking Ferrule
S Side	**MC** Male connector with 300mm (11.81in.) cable
C Closed	**FC** Female connector with 300mm (11.81in.)cable
	NA Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Length	
F	Front	**OW** Open wire 300mm (11.81in.)	**Max. nominal**	8m (26.2ft)
B	Bottom	**OA** Open Wire with Anti-Wicking Ferrule	**Increment**	71.43mm (2.81in.)
S	Side	**MC** Male connector with 300mm (11.81in.) cable		
C	Closed	**FC** Female connector with 300mm (11.81in.)cable		
		NA Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

FORTE 3D LARGE PIXEL RGBW

Outdoor · 3D Bending · Pixel RGBW

Lumen Output (lm/m)


CCT	15W/M
R	29
G	105
B	24
W27K	77
W30K	83
W40K	86
PRGBW27K	234
PRGBW30K	240
PRGBW40K	243
Max. Run Length	8m

Techinical Details

Efficacy	16lm/W @RGBW30K 15W
CRI	Ra≥80
Beam Angle	110°
IK Rating	IK10 (with aluminium profile)
Average Life (L70B10)	>32,000 hours
IC Model	UCS 512CLN
Pixel/M	14
Pixel Size	71mm/pixel
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

F3DL-W8-24V-PRGBW30K-150-FT-F-OW-F-OW
FORTE 3D LARGE PIXEL RGBW, 3D Bend, PRGBW30K, 15W/M

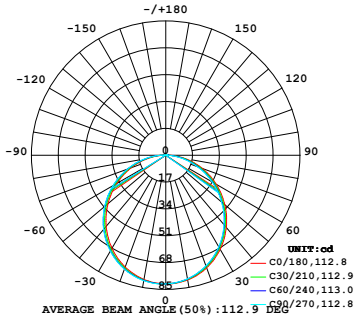

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	63.1	26.2%
0-40	103.3	42.9%
0-60	182.8	76.0%
0-90	237.9	98.9%
0-180	240.6	100.0%


FORTE 3D LARGE PIXEL RGBW

Outdoor · 3D Bending · Pixel RGBW


Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

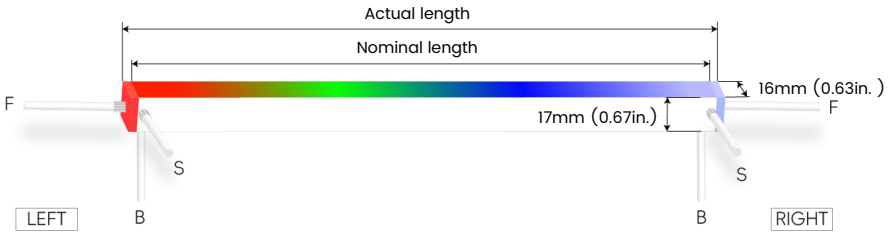





FO: Flush Opaque – IP68, factory-made only

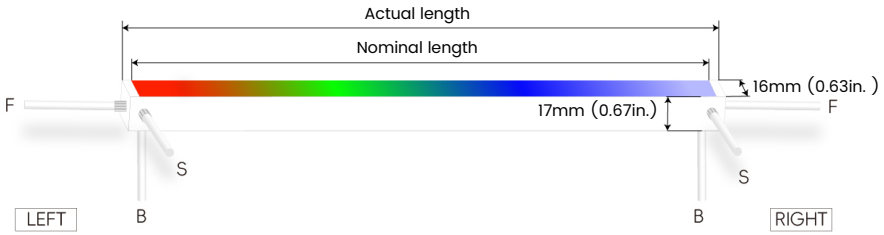



Silicone end cap – IP67, for field cuttable only

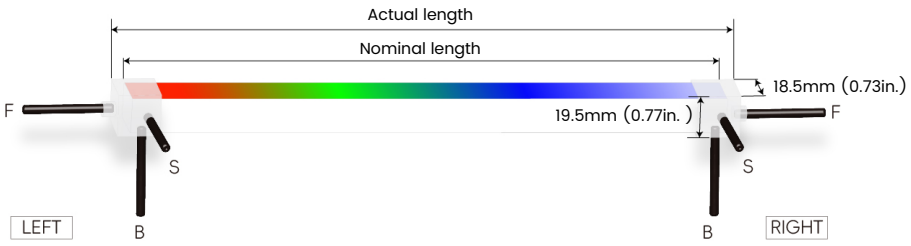





Connector Wire Options




OW: Open wire, **Dry only**
Standard 300mm (11.81in.),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 22 AWG





FC: Female connector, **Wet**
Standard 300mm (11.81in.), 22 AWG



OA: Open Wire with **Anti-Wicking Ferrule, Wet**
Standard 300mm (11.81in.),20 AWG,
Protects against water ingress through the power cable



Mounting Options



NF1617-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BC


Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



NF1617-RC


Name	Straight recessed channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1617-MC


Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BMC



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Top Bending Diameter	600mm(23.6in.)
Min. Side Bending Diameter	1600mm(63in.)



NF1617-SCS



Name	Straight surface channel
Material	Aluminum with silicone groove
Standard Length	1m (3.28ft)



NF1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	1m (3.28ft)







NF1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	1m (3.28ft)



Mounting Options



NF1617-BPC


Name	Bendable surface channel
Material	Polycarbonate
Standard Length	1m (3.28ft)
Min. Bending Radius	150mm (5.91in.)



NF1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








NF1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)

* NF1617-LS must be installed with NF1617-SC









NF1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)

* NF1617-AC must be installed with NF1617-SC




NF1617-RC-SPC


Name	Spring clip
Standard Pkg	1pcs

* NF1617-RC-SPC must be installed with NF1617-RC


FORTE 3D LARGE PIXEL RGBW

Outdoor · 3D Bending · Pixel RGBW


Silicone End Caps (Optional, purchase for extra)



NF1617-SEC-C
Silicone closed end cap



NF1617-SEC-F-5P
Silicone end cap front entry with 300mm (11.81in.) cable, 5 pin



NF1617-SEC-S-5P
Silicone end cap side entry with 300mm (11.81in.) cable, 5 pin



NF1617-SEC-B-5P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 5 pin

Additional Accessories (Optional, purchase for extra)



MCW-5P-67
Male connector,
300mm (11.81in.) white cable,
5 pin, IP67, Wet, 22 AWG



FCW-5P-67
Female connector,
300mm (11.81in.) white cable,
5 pin, IP67, Wet, 22 AWG



MCB-5P-67
Male connector,
300mm (11.81in.) black cable,
5 pin, IP67, Wet, 22 AWG



FCB-5P-67
Female connector,
300mm (11.81in.) black cable,
5 pin, IP67, Wet, 22 AWG




SW-3P-6
Shielded signal wire,
standard 6m(20ft), customizable
3 pin, 18AWG



SC-3P-6
XLR3 extension signal connector,
standard 6m(20ft), customizable
3 pin



NC-6
RJ45 extension network connector,
standard 6m(20ft), customizable



MFTCW-5P-67
Male and female T-shaped connector,
white cable,
5 pin, IP67, Wet

FORTE 3D LARGE PIXEL RGBW

Outdoor · 3D Bending · Pixel RGBW

Drivers


Non-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

DMX-Decoders & Controllers Options

Type	Code	Description	Environment	Size (L x W x H)
Controllers	CW4	1024 DMX channels, 6 scene buttons and a color wheel, ideal for hotels, homes and public	Indoor	145 * 107 * 10 mm
Controllers	Artnet-DMX-8	8 DMX universes, Artnet- to-DMX512 converter with RJ45 port, ideal for lighting control	Indoor	483 * 200 * 44 mm
Controllers	WT-DMX-M	WiFi & RF 3-in-1 DMX512 controller for RGB/RGBW/RGBCCT lighting	Indoor	120 * 43 * 27 mm

Wiring Diagram

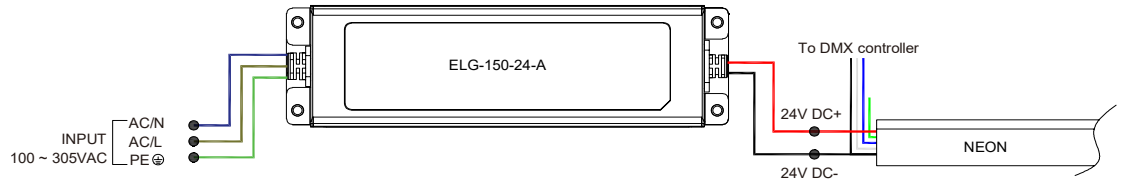

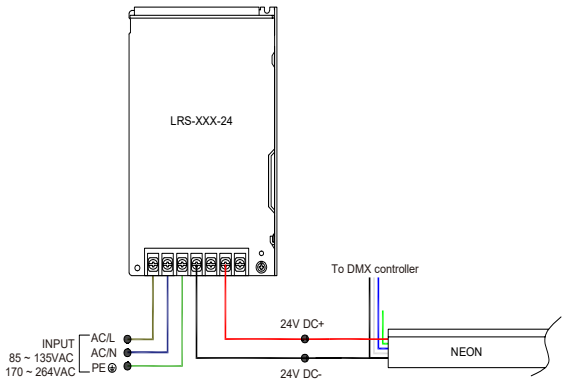

FORTE 3D LARGE PIXEL RGBW

Outdoor · 3D Bending · Pixel RGBW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m