ARCUS SPEC 3D LARGE - COMBO SYSTEM

(Standard Cut + Free Cut Finishing Piece)

3D Bending · Static White

Features

The Arcus Combo System combines standard cut and free cut capabilities to provide precise, made-to-order lengths, utilizing Standard Cuts for the majority of the runs, with Free Cuts reserved only for the finishing segments. This combo usage achieves cost savings of 20–40% versus using Free Cuts for the entire length. Both Arcus Standard Cut and Free Cut maintain consistent binning and brightness.

The system is suitable for indoor and outdoor applications, and delivers exceptional performance with a CRI over 95, brightness of up to 961 lm/m, and 1-step binning, ensuring robustness and design flexibility.

Date

Fixture type

Project name

Project phase




Applications


Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.

Combo System



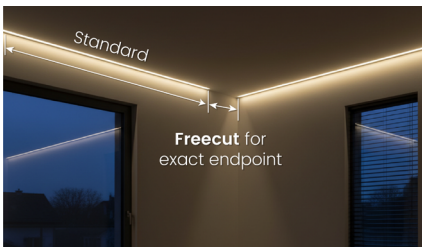

Bending Directions & Diameters

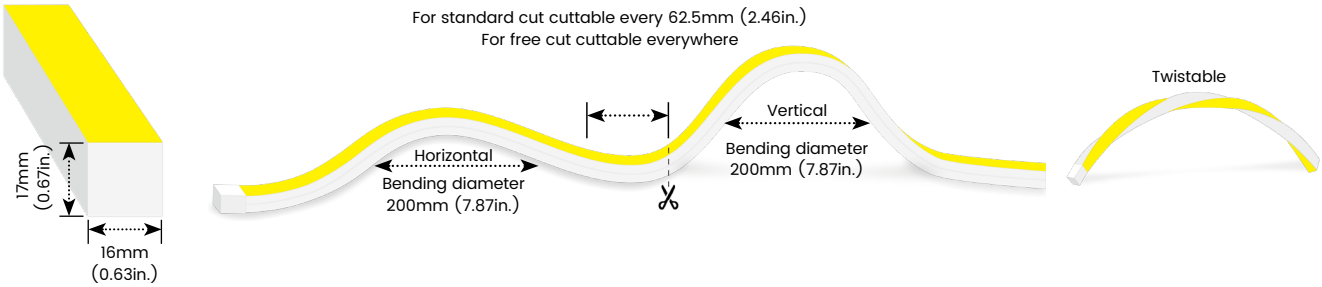

Order Code

Model	Environment	Voltage	CCT	Power	End Cap		Left Feed Entry		
AS3DL	**D5-Dry (IP54)**	**24V**-DC24V	**27K**-2700K	**100**-10W/M	**FT**	Flush Translucent	**F**	Front	**OW** Open wire 300mm (11.81in.)
AS3DLFC	**W7-Wet(IP67)**		**30K**-3000K		**FO**	Flush Opaque	**B**	Bottom	**MC** Male connector with 300mm (11.81in.) cable
			35K-3500K				**S**	Side	**FC** Female connector with 300mm (11.81in.)cable
			40K-4000K				**C**	Closed	**NA** Only for Closed Feed Entry

Assembly Builder

***AS3DLFC:** Free Cut delivers precise field-cut lengths for the last segment, while keeping in line with standard cut in dimensions, binning, output, and mounting for a uniform appearance.

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 300mm (11.81in.)	**Max. nominal**	5m(16.4ft)
B	Bottom	**MC**	Male connector with 300mm (11.81in.) cable	**Increment**	62.5mm(2.46in.)
S	Side	**FC**	Female connector with 300mm (11.81in.)cable		
C	Closed	**NA**	Only for Closed Feed Entry		

Mounting Order Code

Product Code
Please select on the Mounting Options page

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

ARCUS SPEC 3D LARGE - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

Lumen Output (lm/m)

CCT	10W/M
2700K	860
3000K	890
3500K	940
4000K	961
Max. Run for standard cut	5m
Max. run for Free cut	4m


Techinical Details

Efficacy	89lm/W @3000K 10W
CRI	CRI>95
Beam Angle	120°
LED MacAdam	1 step
IK Rating	IK10 (with aluminium profile)
Average Life (L70B10)	>44,000 hours
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

AS3DL-D5-24V-30K-100-FT-F-OW-F-OW

ARCUS SPEC 3D LARGE, 3D bending, 3000K, 10W/M

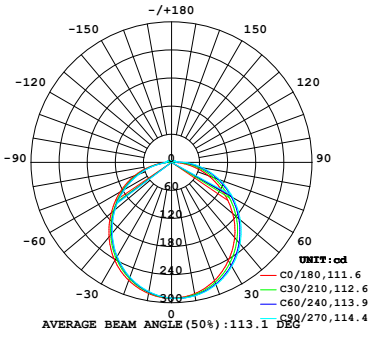


Zonal Lumen Summary

Zone	Lumen	% Fixture
0-30	224.4	25.2%
0-40	367.1	41.2%
0-60	651.3	73.2%
0-90	861.6	96.8%
0-180	890.2	100%

TM30

ARCUS SPEC 3D LARGE, 3D bending, 3500K, 10W/M

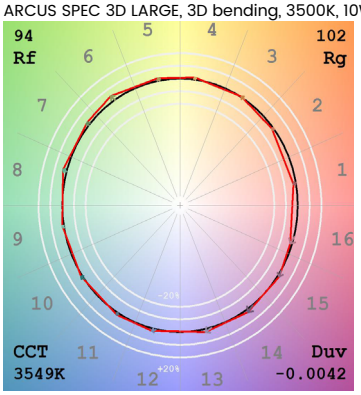


ARCUS SPEC 3D LARGE - COMBO SYSTEM


3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)


Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

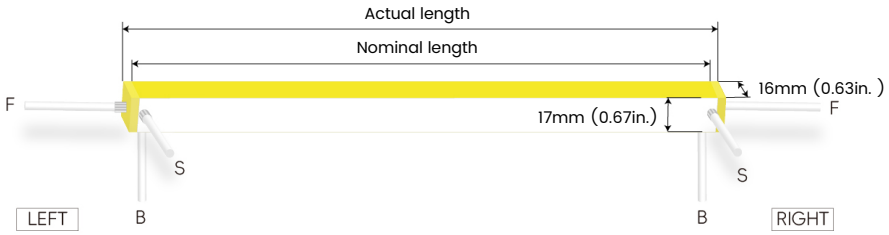





FO: Flush Opaque – IP67, factory-made only

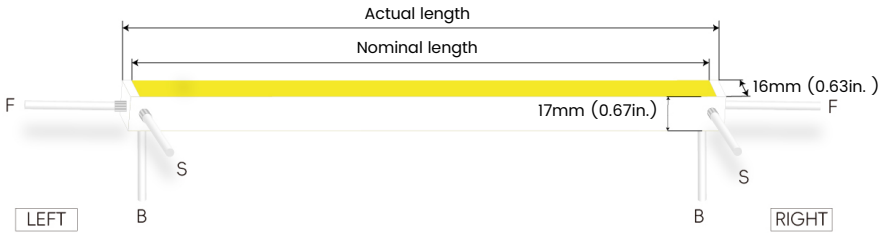




Silicone end cap – IP67, for field cuttable only

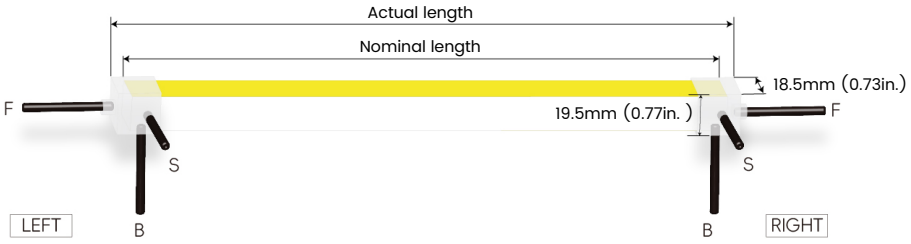





Connector Wire Options



OW: Open wire, **Dry only**
Standard 300mm (11.81in.),18 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 18 AWG





FC: Female connector, **Wet**
Standard 300mm (11.81in.), 18 AWG

ARCUS SPEC 3D LARGE - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)



Mounting Options



NF1617-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BC


Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



NF1617-RC


Name	Straight recessed channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1617-MC


Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BMC



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Top Bending Diameter	600mm(23.6in.)
Min. Side Bending Diameter	1600mm(63in.)



NF1617-SCS



Name	Straight surface channel
Material	Aluminum with silicone groove
Standard Length	1m (3.28ft)



NF1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1617-PC


Name	PC channel
Material	Polycarbonate
Standard Length	1m (3.28ft)

ARCUS SPEC 3D LARGE - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)



Mounting Options




NF1617-BPC


Name	Bendable surface channel
Material	Polycarbonate
Standard Length	1m (3.28ft)
Min. Bending Radius	150mm (5.91in.)



NF1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








NF1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)

* NF1617-LS must be installed with NF1617-SC









NF1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)

* NF1617-AC must be installed with NF1617-SC




NF1617-RC-SPC

Name	Spring clip
Standard Pkg	1pcs


* NF1617-RC-SPC must be installed with NF1617-RC

ARCUS SPEC 3D LARGE - COMBO SYSTEM


3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)


Silicone End Caps (Optional, purchase for extra)



NF1617-SEC-C
Silicone closed end cap



NF1617-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin



NF1617-SEC-S-2P
Silicone end cap side entry with 300mm (11.81in.) cable, 2 pin



NF1617-SEC-B-2P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector,
300mm (11.81in.)white cable,
2 pin, IP67, Wet, 18 AWG



FCW-2P-67
Female connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 18 AWG




MCB-2P-67
Male connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 18 AWG



FCB-2P-67
Female connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 18 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades



NF1617-IT
Installation tool for NF1617-BPC

ARCUS SPEC 3D LARGE - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

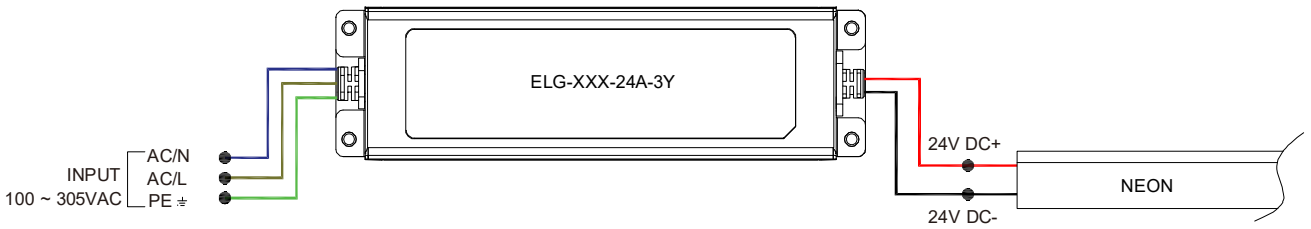

3 in 1-dimmable

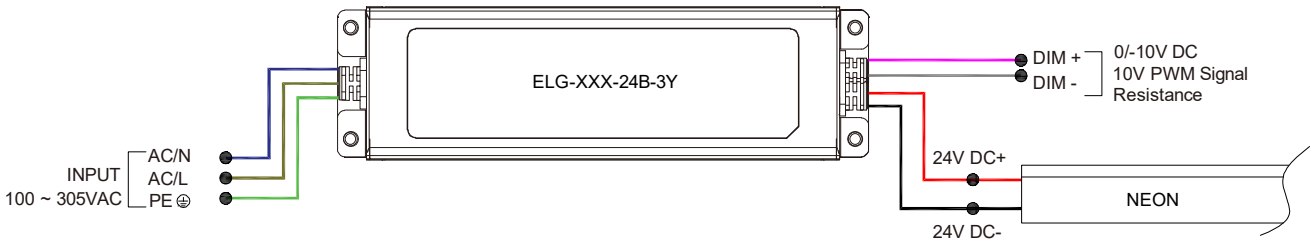

DALI-dimmable

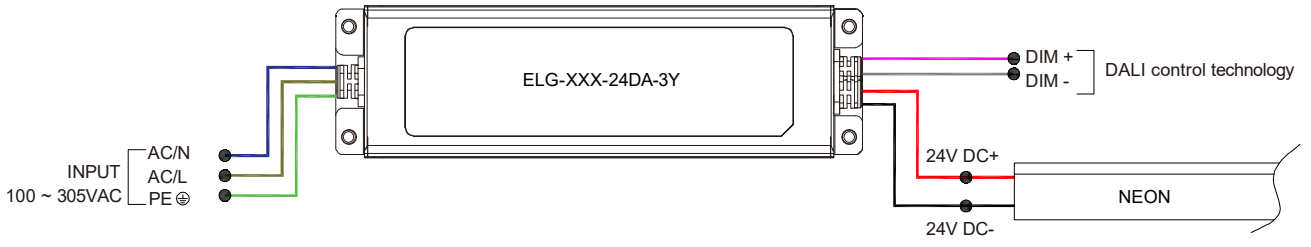

ARCUS SPEC 3D LARGE - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m