ARCUS VALUE 3D LARGE

3D Bending · Static White

Features


- True 3D design, no curling or distortion, clean finish, uniform light
- IP54&IP67 rated, ideal for indoor and outdoor uses
- 5 years warranty

Date | Fixture type


Project name | Project phase

Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.

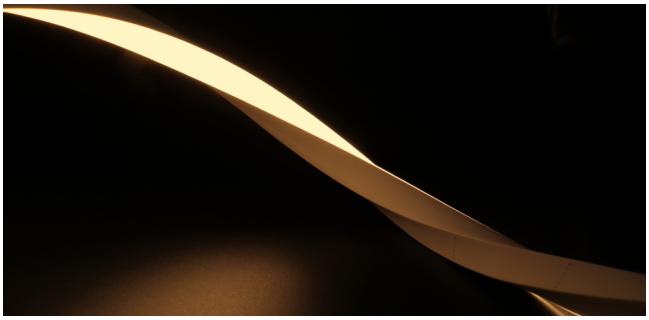

Bending Directions & Diameters

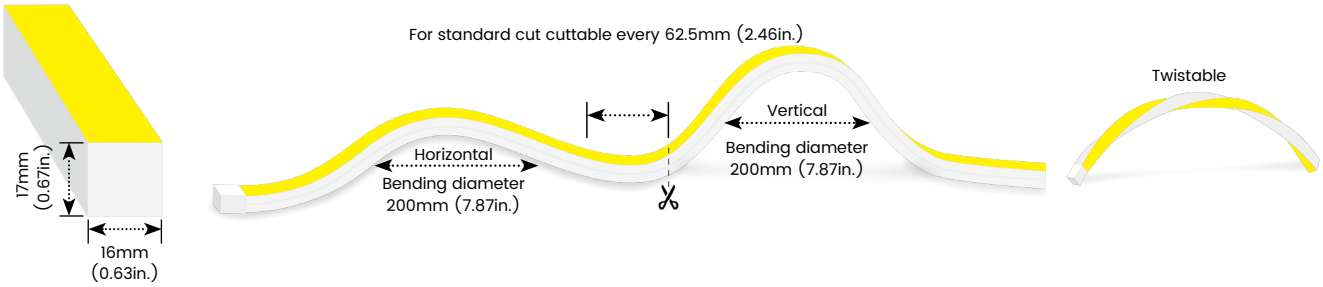

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry
AV3DL	**D5-Dry (IP54)** **W7-Wet(IP67)**	**24V**-DC24V	**22K**-2200K **27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K	**100**-10W/M	**FT** Flush Translucent **FO** Flush Opaque	**F** Front **OW** Open wire 300mm (11.81in.) **B** Bottom **MC** Male connector with 300mm (11.81in.) cable **S** Side **FC** Female connector with 300mm (11.81in.)cable **C** Closed **NA** Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 300mm (11.81in.)	**Max. nominal**	5m(16.4ft)
B	Bottom	**MC**	Male connector with 300mm (11.81in.) cable	**Increment**	62.5mm(2.46in.)
S	Side	**FC**	Female connector with 300mm (11.81in.)cable		
C	Closed	**NA**	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

ARCUS VALUE 3D LARGE

3D Bending · Static White

Lumen Output (lm/m)


CCT	10W/M
2200K	730
2700K	840
3000K	870
3500K	890
4000K	890
Max. Run for standard cut	5m

Techinical Details

Efficacy	87lm/W @3000K 10W
CRI	Ra≥90
Beam Angle	120°
IK Rating	IK10 (with aluminium profile)
Average Life (L70B10)	>44,000 hours
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

AV3DL-D5-24V-30K-100-FT-F-OW-F-OW
ARCUS VALUE 3D LARGE, 3D bending, 3000K, 10W/M

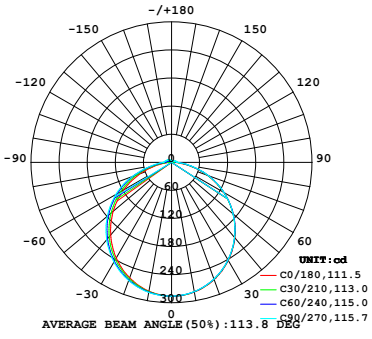

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	221.8	25.5%
0-40	363.5	41.8%
0-60	646.2	74.4%
0-90	837.9	96.4%
0-180	869.0	100.0%


ARCUS VALUE 3D LARGE

3D Bending · Static White


Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

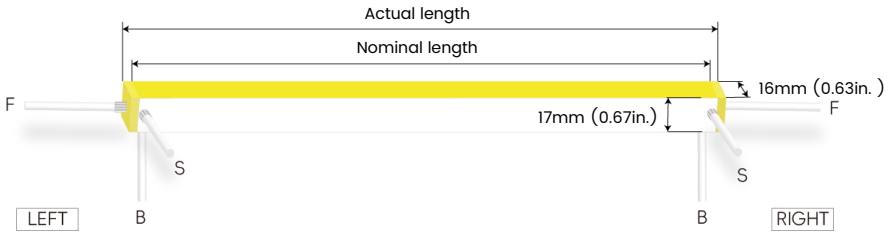





FO: Flush Opaque – IP67, factory-made only

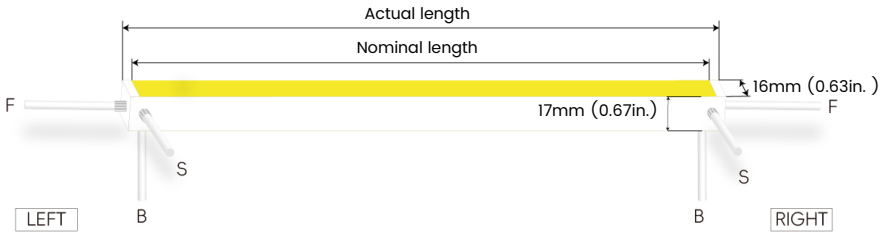




Silicone end cap – IP67, for field cuttable only

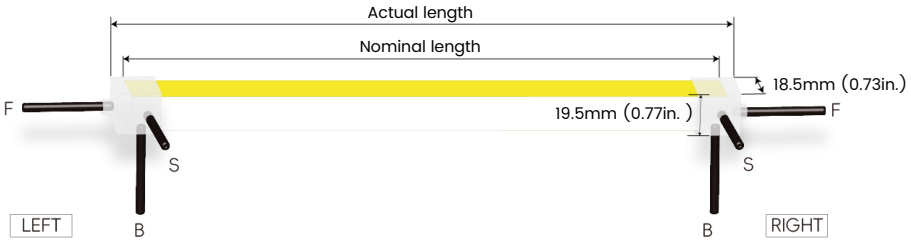





Connector Wire Options



OW: Open wire, **Dry only**
Standard 300mm (11.81in.),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 20 AWG





FC: Female connector, **Wet**
Standard 300mm (11.81in.), 20 AWG

ARCUS VALUE 3D LARGE

3D Bending · Static White



Mounting Options



NF1617-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BC


Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



NF1617-RC


Name	Straight recessed channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1617-MC


Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BMC



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Top Bending Diameter	600mm(23.6in.)
Min. Side Bending Diameter	1600mm(63in.)



NF1617-SCS


Name	Straight surface channel
Material	Aluminum with silicone groove
Standard Length	1m (3.28ft)



NF1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	1m (3.28ft)

ARCUS VALUE 3D LARGE

3D Bending · Static White



Mounting Options




NF1617-BPC


Name	Bendable surface channel
Material	Polycarbonate
Standard Length	1m (3.28ft)
Min. Bending Radius	150mm (5.91in.)



NF1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








NF1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)

* NF1617-LS must be installed with NF1617-SC









NF1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)

* NF1617-AC must be installed with NF1617-SC




NF1617-RC-SPC


Name	Spring clip
Standard Pkg	1pcs

* NF1617-RC-SPC must be installed with NF1617-RC


ARCUS VALUE 3D LARGE

3D Bending · Static White


Silicone End Caps (Optional, purchase for extra)



NF1617-SEC-C
Silicone closed end cap



NF1617-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin



NF1617-SEC-S-2P
Silicone end cap side entry with 300mm (11.81in.) cable, 2 pin



NF1617-SEC-B-2P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector,
300mm (11.81in.)white cable,
2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 20 AWG




MCB-2P-67
Male connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades



NF1617-IT
Installation tool for NF1617-BPC

ARCUS VALUE 3D LARGE

3D Bending · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

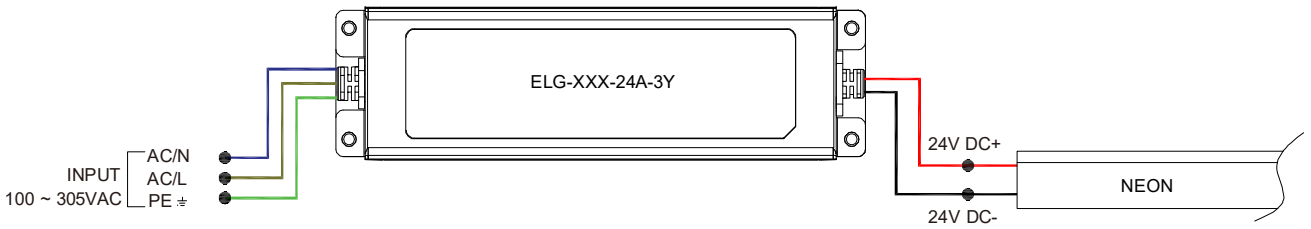

3 in 1-dimmable

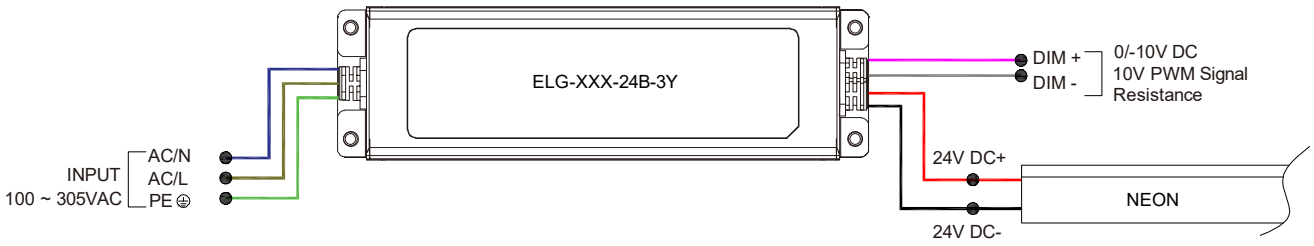

DALI-dimmable

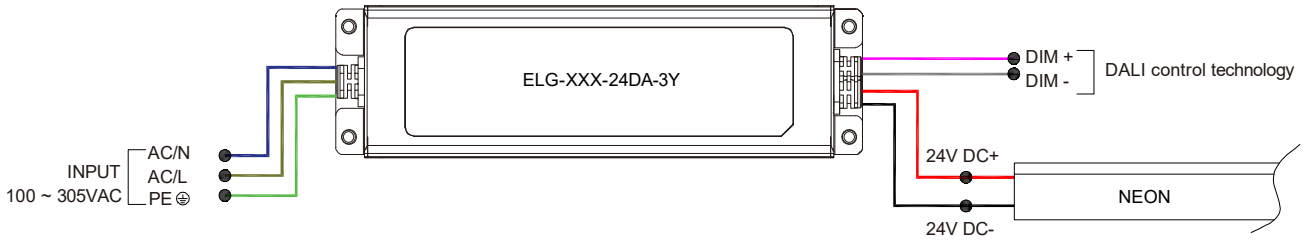

ARCUS VALUE 3D LARGE

3D Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m