Beamever

Designer's Custom Playground

LINIO NEON 0306X SV

Horizontal Bending · Static White

Features

- 3mm ultra slim form factor, easily fits into extremely tight spaces
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty

Date

Fixture type

Project name


Project phase

Applications


Under cabinets, niches, shelves, closets, millwork, furnitures, etc.




Bending Directions & Diameters



Dimensions



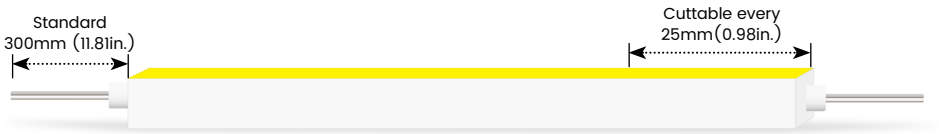

Order Code

Model	Environment	Voltage	CCT	Power	End Cap		Left Feed Entry		
LN0306XSV	**W5**-Wet (IP65)	**24V**-DC24V	**22K**-2200K **27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **57K**-5700K	**050**-5W/M	**FT** **FO**	Flush Translucent Flush Opaque	**F** **C**	Front Closed	**OW** Open wire 300mm (11.81in.) **MC** Male connector with 200mm (7.87in.) cable **FC** Female connector with 200mm (7.87in.)cable **NA** Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 300mm (11.81in.)	**Max. nominal**	5m (16.4ft)
C	Closed	**MC**	Male connector with 200mm (7.87in.) cable	**Increment**	25mm (0.98in.)
		FC	Female connector with 200mm (7.87in.)cable		
		NA	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

LINIO NEON 0306X SV

Horizontal Bending · Static White

Lumen Output (lm/m)


CCT	5W/M
2200K	70
2700K	81
3000K	87
3500K	90
4000K	92
5700K	93
Max. Run Length	5m

Techinical Details

Efficacy	17.4lm/W @3000K 5W
CRI	Ra≥90
Beam Angle	120°
Average Life (L80B10)	>47,000 hours
Storage Temperature	-40°C~ 55°C
Operating Temperature	-40°C~ 55°C

Photometry

LN0306XSV-W5-24V-30K-050-FT-F-OW-F-OW
LINIO NEON 0306X SV, Horizontal bend, 3000K, 5W/M

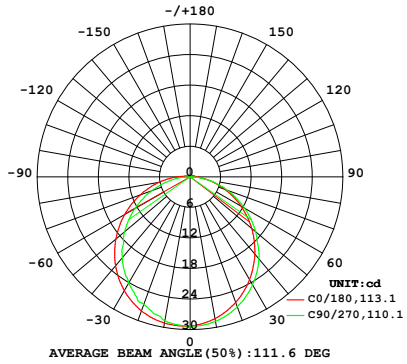

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	22.6	26.1%
0-40	36.9	42.7%
0-60	65.2	75.4%
0-90	85.4	98.7%
0-180	86.5	100.0%


LINIO NEON 0306X SV

Horizontal Bending · Static White


Feed Entry / End Cap Options


FT: Flush Translucent – IP54, factory-made only

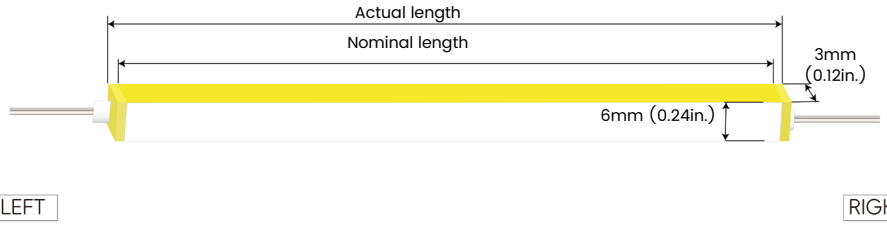





FO: Flush Opaque – IP54, factory-made only

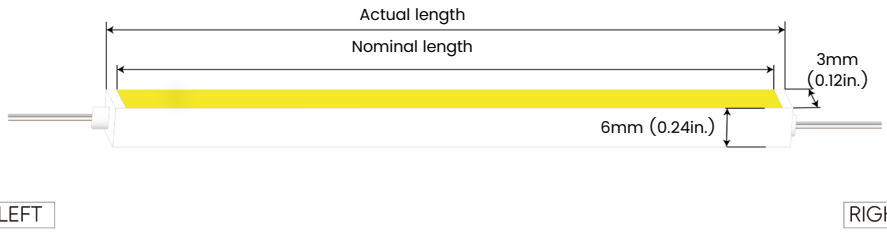



Silicone end cap – IP65, for field cuttable only

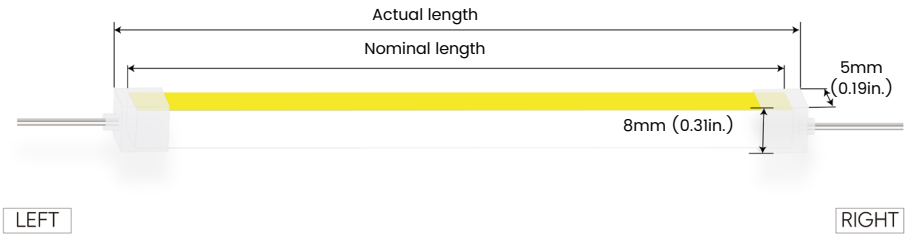





Connector Wire Options



OW: Open wire, **Dry only**
Standard 300mm (11.81in.), 24 AWG,
wire length customizable



MC: Male connector, **Dry**
Standard 200mm (7.87in.), 24 AWG




FC: Female connector, **Dry**
Standard 200mm (7.87in.), 24 AWG

LINIO NEON 0306X SV

Horizontal Bending · Static White

Mounting Options








NF0306-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)








NF0306-CL

Name	Mounting clip
Material	Aluminum
Standard Length	15mm(0.59in.)


LINIO NEON 0306X SV

Horizontal Bending · Static White

Silicone End Caps (Optional, purchase for extra)




NF0306-SEC-C
Silicone closed end cap




NF0306-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MC-2P-20
Male connector,
200mm (7.87in.) red&black,
2 pin, IP20, 24 AWG



FC-2P-20
Female connector,
200mm (7.87in.) red&black,
2 pin, IP20, 24 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

LINIO NEON 0306X SV

Horizontal Bending · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

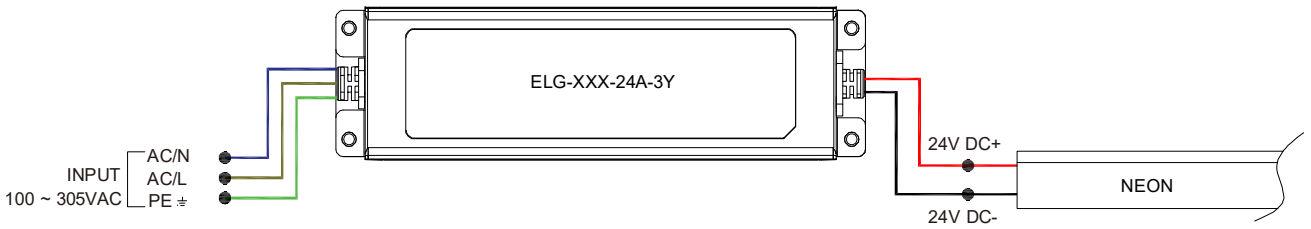

3 in 1-dimmable

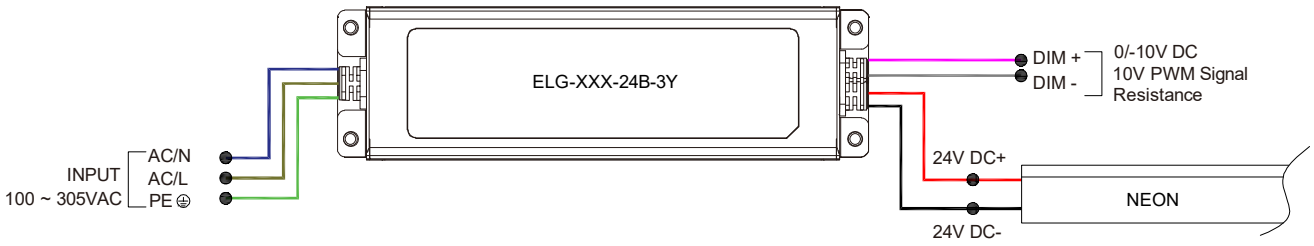

DALI-dimmable

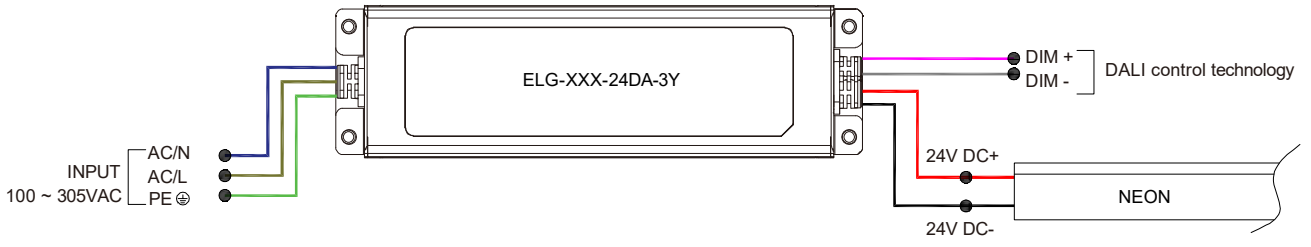

LINIO NEON 0306X SV

Horizontal Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m