ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White

Features

- True 3D design, clean finish, tunable white 2700K to 3000K
- IP54/IP67 rated, ideal for indoor/outdoor uses
- 5 years warranty

Date

Fixture type

Project name


Project phase

Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.



Bending Directions & Diameters

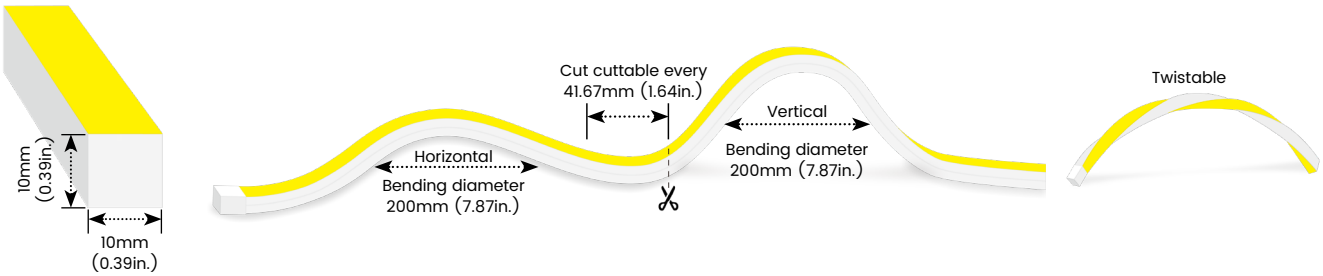

Order Code

Model	Environment	Voltage	CCT	Power	End Cap
AC3DMSC	**D5-Dry (IP54)** **W7-Wet(IP67)**	**24V**-DC24V	**27K30K**-2700K+3000K	**100**-10W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 300mm (11.81in.)
B	Bottom	**MC**	Male connector with 300mm (11.81in.) cable
S	Side	**FC**	Female connector with 300mm (11.81in.)cable
C	Closed	**NA**	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 300mm (11.81in.)
B	Bottom	**MC**	Male connector with 300mm (11.81in.) cable
S	Side	**FC**	Female connector with 300mm (11.81in.)cable
C	Closed	**NA**	Only for Closed Feed Entry

Length	
Max. nominal	5m(16.4ft)
Increment	41.67mm (1.64in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White

Lumen Output (lm/m)


CCT	10W/M
2700K	780
3000K	810
2700K+3000K	800
Max. Run Length	5m

Techinical Details

Efficacy	80lm/W @2700K+3000K 10W
CRI	Ra≥90
Beam Angle	110°
LED MacAdam	3 step
IK Rating	IK08 (with aluminium profile)
Average Life (L70B10)	>44,000 hours
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

AC3DMSC-D5-24V-27K30K-100-FT-F-OW-F-OW
ARCUS CORE 3D MEDIUM SC, 3D bending, 2700K+3000K, 10W/M

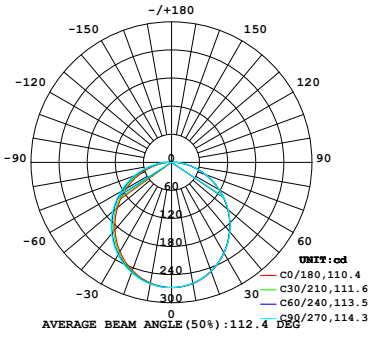

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	206.8	25.9%
0-40	338.1	42.4%
0-60	597.9	75.0%
0-90	780.6	97.9%
0-180	797.4	100.0%


ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White


Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

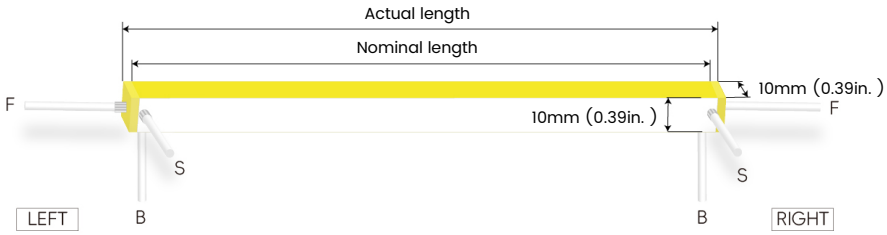





FO: Flush Opaque – IP67, factory-made only

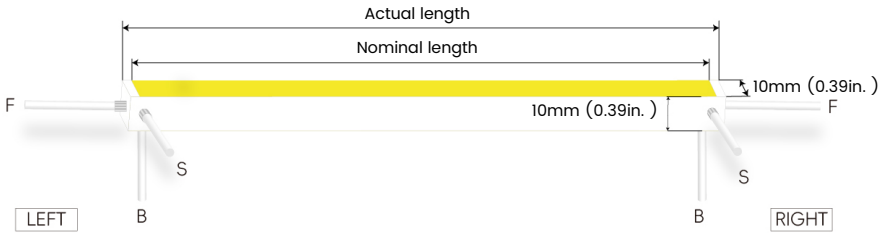




Silicone end cap – IP67, for field cuttable only

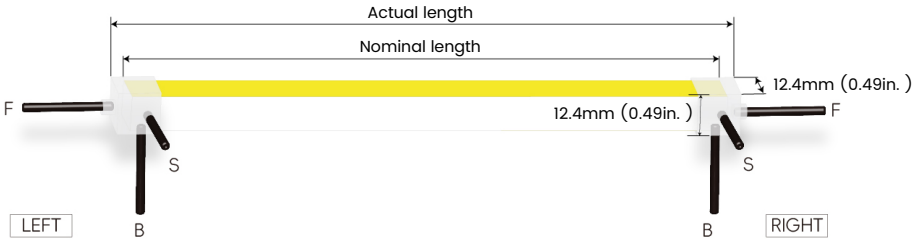





Connector Wire Options



OW: Open wire, **Dry only**
Standard 300mm (11.81in.),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 20 AWG




FC: Female connector, **Wet**
Standard 300mm (11.81in.), 20 AWG

ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White


Mounting Options



NF1010-SC


Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1010-BC



Name	Bendable surface channel
Material	Stainless Steel
Standard Length	1m (3.28ft)
Min. Bending Diameter	100mm(3.94in.)
*Not suitable for upside-down installation	



NF1010-MC


Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1010-IC


Name	Inside corner channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1010-OC


Name	Outside corner channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1010-SBC


Name	Skirting board channel
Material	Aluminum
Standard Length	1m (3.28ft)





NF1010-PC

Name	PC channel
Material	PC
Standard Length	1m (3.28ft)






NF1010-BPC


Name	Bendable PC channel
Material	PC
Standard Length	1m (3.28ft)

ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White

Mounting Options








NF1010-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








NF1010-CLS

Name	Mounting clip
Material	Stainless Steel
Standard Length	7mm(0.28in.)
*Not suitable for upside-down installation	


ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White


Silicone End Caps (Optional, purchase for extra)



NF1010-SEC-C
Silicone closed end cap



NF1010-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin



NF1010-SEC-S-2P
Silicone end cap side entry with 300mm (11.81in.) cable, 2 pin



NF1010-SEC-B-2P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector,
300mm (11.81in.)white cable,
2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

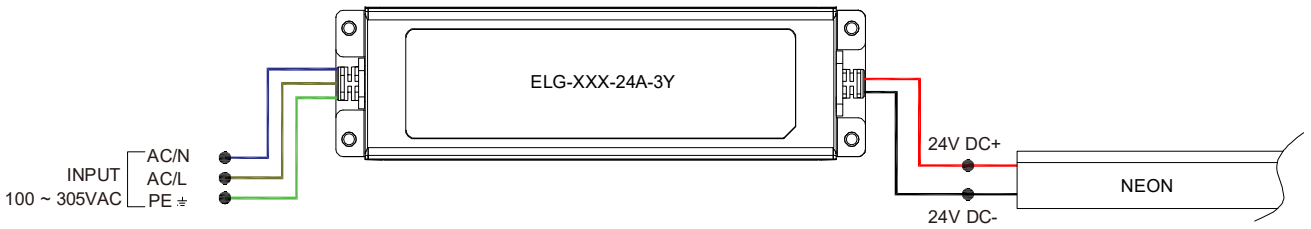

3 in 1-dimmable

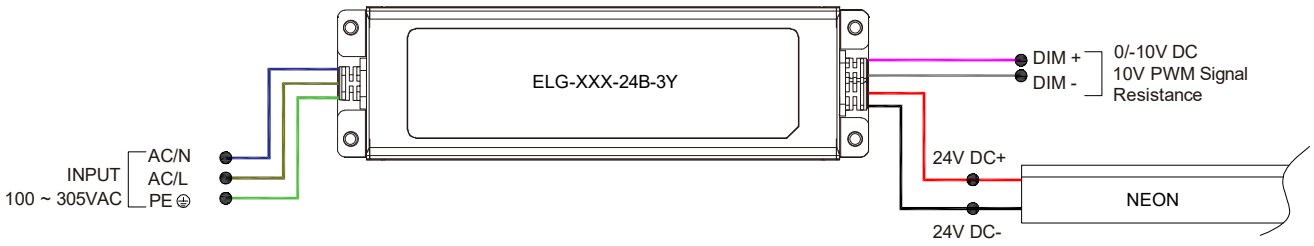

DALI-dimmable

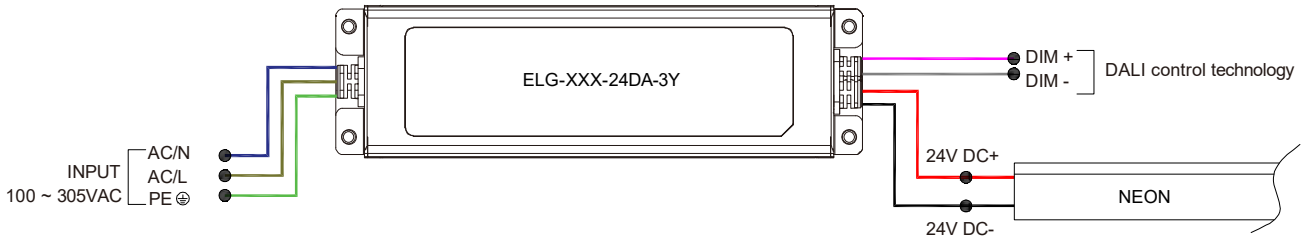

ARCUS CORE 3D MEDIUM SC

3D Bending · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m