Beamever

Designer's Custom Playground

LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White

Features

- 4mm slim profile & Tunable white from 2700K to 6000K
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty

Date

Fixture type

Project name


Project phase

Applications


Under cabinets, niches, shelves, closets, millwork, furnitures, etc.




Bending Directions & Diameters



Dimensions



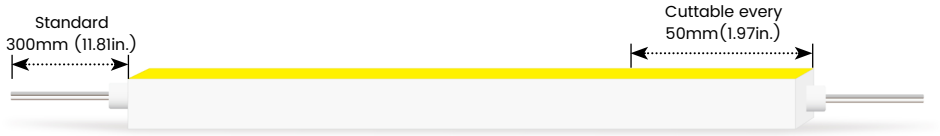

Order Code

Model	Environment	Voltage	CCT	Power	End Cap
LN0408XSV	**W5**-Wet (IP65)	**24V**-DC24V	**27K60K**-2700K+6000K	**060**-6W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry	
F Front	**OW** Open wire 300mm (11.81in.)
C Closed	**MC** Male connector with 200mm (7.87in.) cable
	FC Female connector with 200mm (7.87in.)cable
	NA Only for Closed Feed Entry

Assembly Builder

Right Feed Entry		Length	
F Front	**OW** Open wire 300mm (11.81in.)	**Max. nominal**	5m (16.4ft)
C Closed	**MC** Male connector with 200mm (7.87in.) cable	**Increment**	50mm (1.97in.)
	FC Female connector with 200mm (7.87in.)cable		
	NA Only for Closed Feed Entry		

Mounting Order Code

Product Code
Please select on the Mounting Options page

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White

Lumen Output (lm/m)


CCT	6W/M
2700K	158
6000K	165
2700K+6000K	160
Max. Run Length	5m

Techinical Details

Efficacy	26.7lm/W @2700K+6000K 6W
CRI	Ra≥90
LED MacAdam	3 steps
IK Rating	IK07(with aluminium profile)
Average Life (L80B10)	>47,000 hours
Storage Temperature	-40°C~ 60°C
Operating Temperature	-40°C~ 55°C

Photometry

LN0408XSV-W5-24V-27K60K-060-FT-F-OW-F-OW
LINIO NEON 0408X SV TW, Horizontal bend, 2700K+6000K, 6W/M

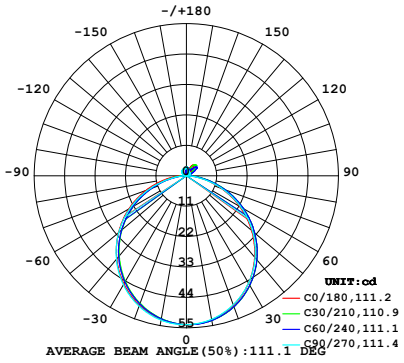

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	41.6	25.9%
0-40	68.0	42.4%
0-60	119.9	74.7%
0-90	152.5	95.1%
0-180	160.4	100.0%


LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White


Feed Entry / End Cap Options


FT: Flush Translucent – IP54, factory-made only

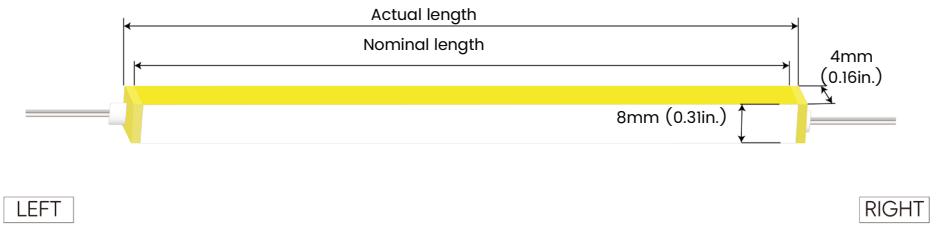





FO: Flush Opaque – IP54, factory-made only

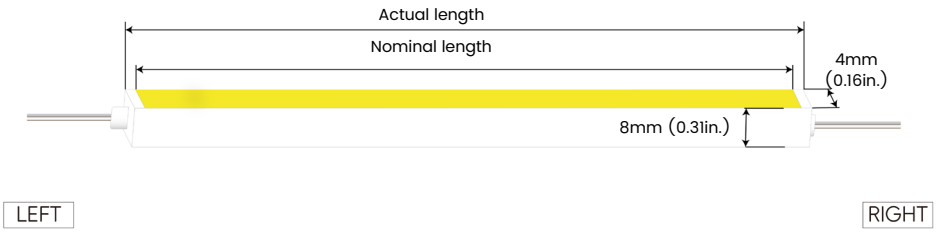



Silicone end cap – IP65, for field cuttable only

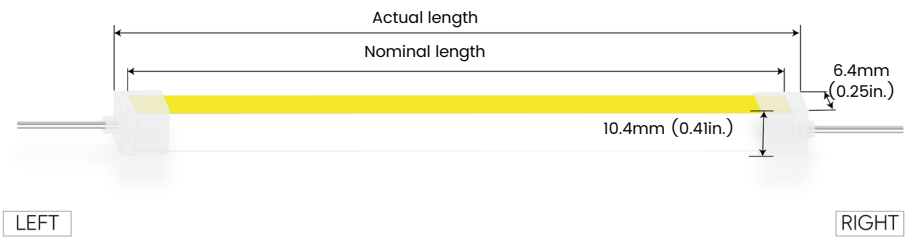





Connector Wire Options



OW: Open wire, **Dry only**
Standard 300mm (11.81in.), 24 AWG,
wire length customizable



MC: Male connector, **Dry**
Standard 200mm (7.87in.), 24 AWG




FC: Female connector, **Dry**
Standard 200mm (7.87in.), 24 AWG

LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White


Mounting Options



NF0408-SC


Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF0408-BC


Name	Bendable surface channel
Material	Stainless Steel
Standard Length	1m (3.28ft)
Min. Bending Diameter	30mm(1.18in.)
*Not suitable for upside-down installation	



NF0408-CL

Name	Mounting clip
Material	Aluminum
Standard Length	15mm(0.59in.)




NF0408-CLS

Name	Mounting clip
Material	Stainless Steel
Standard Length	20.8mm(0.82in.)


LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White

Silicone End Caps (Optional, purchase for extra)




LN0408-SEC-C
Silicone closed end cap




LN0408-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MC-2P-20
Male connector, 200mm (7.87in.) red&black cable, 2 pin, IP20, 24 AWG



FC-2P-20
Female connector, 200mm (7.87in.) red&black cable, 2 pin, IP20, 24 AWG



ADJS
1 Adjustable Angle Scissors Set, with 4 Spare Blades

LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Controller Options


Type	Code	Description	Environment	Size (L x W x H)
Controllers	V2-S & R7-1	2-Color 2-Wire LED Controller, R7-1 single-zone CCT remote compatible, CE certified	Dry/Damp	119.9* 42.9 * 26.9 mm

Wiring Diagram


Non-dimmable

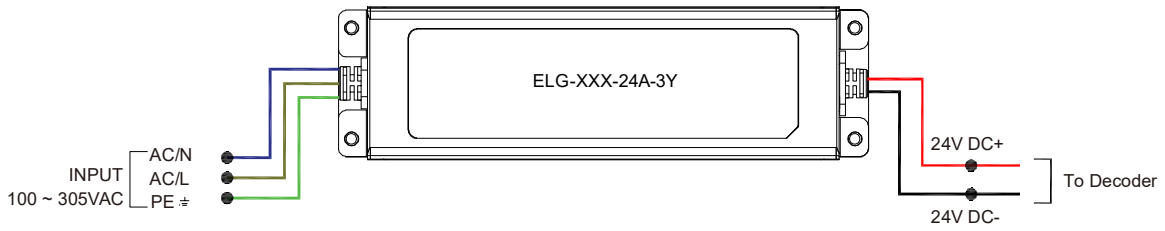

3 in 1-dimmable

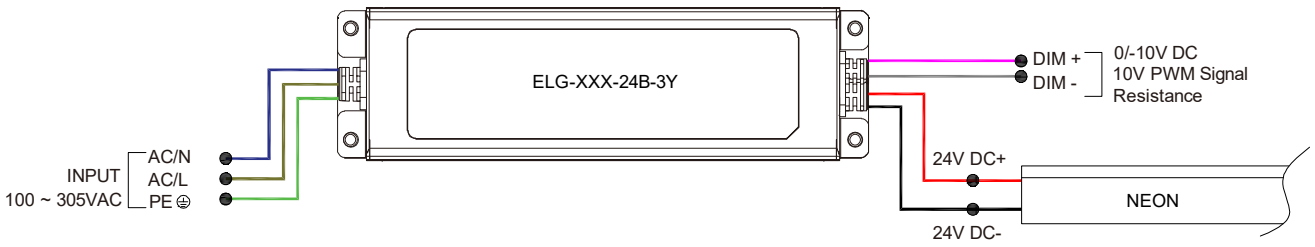

DALI-dimmable

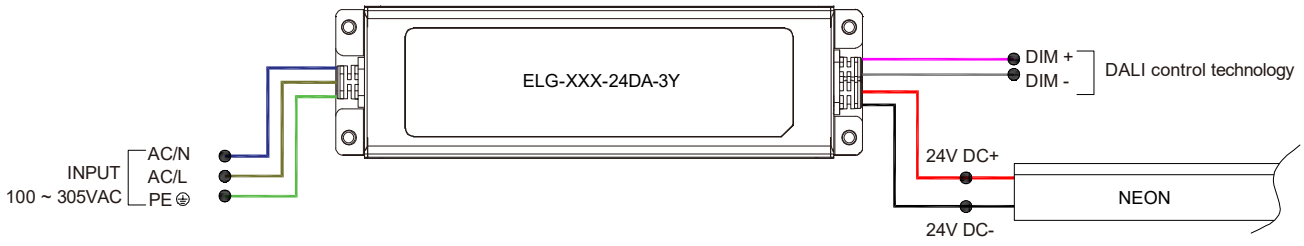

LINIO NEON 0408X SV TW

Horizontal Bending · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m