Beamever

Designer's Custom Playground

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Features

- Premium silicone material & Tunable white from 2700K to 5000K
- IP67 rated, ideal for outdoor uses
- 5 years warranty

Date

Fixture type

Project name


Project phase

Applications


Gardens, parks, hotels, facades, pathways, outdoor steps, etc.




Bending Directions & Diameters



Dimensions



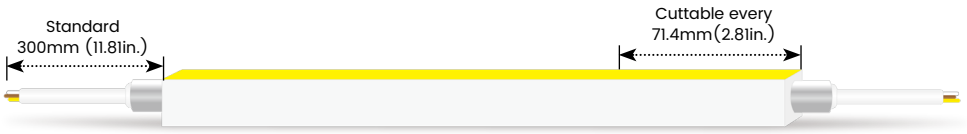

Order Code

Model	Environment	Voltage	CCT	Power	End Cap
LN0612XSV	**W7**-Wet (IP67)	**24V**-DC24V	**27K50K**-2700K+5000K	**130**-13W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry		
F	Front	**OW** Open wire 300mm (11.81in.)
B	Bottom	**MC** Male connector with 300mm (11.81in.) cable
S	Side	**FC** Female connector with 300mm (11.81in.)cable
C	Closed	**NA** Only for Closed Feed Entry

Assembly Builder

Right Feed Entry		
F	Front	**OW** Open wire 300mm (11.81in.)
B	Bottom	**MC** Male connector with 300mm (11.81in.) cable
S	Side	**FC** Female connector with 300mm (11.81in.)cable
C	Closed	**NA** Only for Closed Feed Entry

Length	
Max. nominal	10m (32.8ft)
Increment	71.4mm (2.81in.)

Mounting Order Code

Product Code
Please select on the Mounting Options page

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Lumen Output (lm/m)

CCT	13W/M
2700K	279
5000K	293
2700K+5000K	564
Max. Run Length	10m


Techinical Details

Efficacy	43.4lm/W @2700K+5000K 13W
CRI	Ra≥90
LED MacAdam	2 steps
Average Life (L80B10)	>56,000 hours
Storage Temperature	-40°C~ 60°C
Operating Temperature	-40°C~ 45°C

Photometry

LN0612XSV-W7-24V-27K50K-130-FT-F-OW-F-OW

LINIO NEON 0612X SV TW, Horizontal Bend, 2700K+5000K, 13W/M

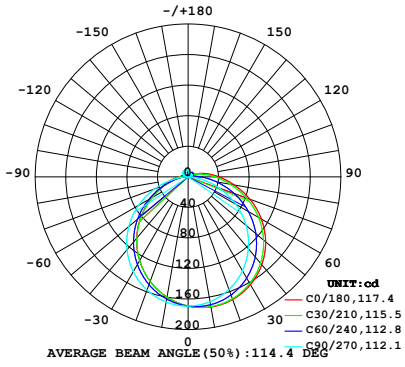

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	131.7	23.3%
0-40	216.4	38.3%
0-60	386.7	68.5%
0-90	522.6	92.6%
0-180	564.6	100.0%


LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White


Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

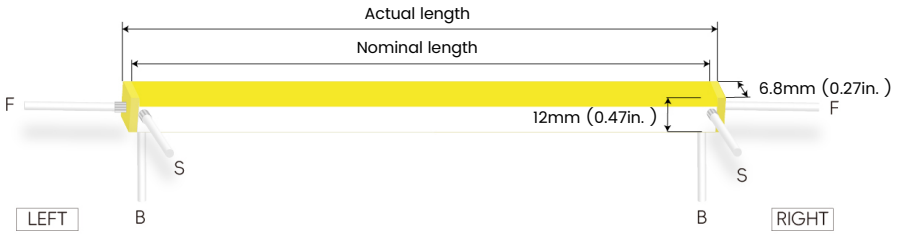





FO: Flush Opaque – IP67, factory-made only

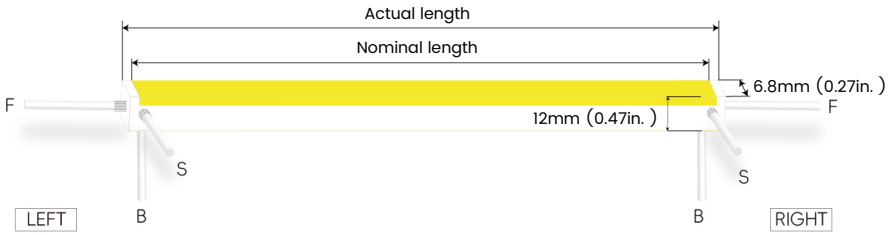



Silicone end cap – IP67, for field cuttable only

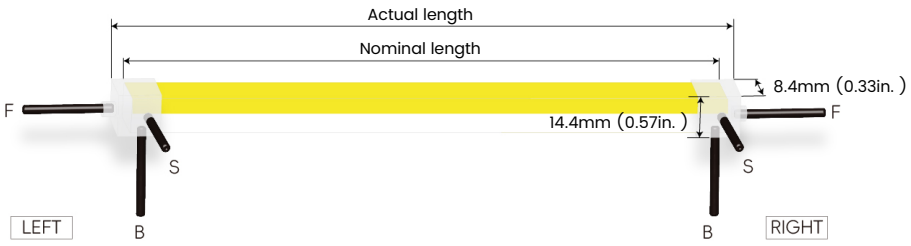





Connector Wire Options



OW: Open wire, **Dry only**
Standard 300mm (11.81in.),20 AWG,
wire length customizable





MC: Male connector, **Wet**
Standard 300mm (11.81in.), 20 AWG



FC: Female connector, **Wet**
Standard 300mm (11.81in.), 20 AWG


Mounting Options



NF0612-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF0612-BC


Name	Bendable surface channel
Material	Stainless Steel
Standard Length	1m (3.28ft)
Min. Bending Diameter	120mm (4.72in.)
*Not suitable for upside-down installation	



NF0612-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm(0.98in.)




NF0612-CLS

Name	Mounting clip
Material	Stainless Steel
Standard Length	15mm(0.59in.)
*Not suitable for upside-down installation	


LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White


Silicone End Caps (Optional, purchase for extra)



NF0612-SEC-C
Silicone closed end cap



NF0612-SEC-F-3P
Silicone end cap front entry with 300mm (11.81in.) cable, 3 pin



NF0612-SEC-S-3P
Silicone end cap side entry with 300mm (11.81in.) cable, 3 pin



NF0612-SEC-B-3P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 3 pin

Additional Accessories (Optional, purchase for extra)



MCW-3P-67
Male connector,
300mm (11.81in.)white cable,
3 pin, IP67, Wet, 20 AWG



FCW-3P-67
Female connector,
300mm (11.81in.) white cable,
3 pin, IP67, Wet, 20 AWG



MCB-3P-67
Male connector,
300mm (11.81in.) black cable,
3 pin, IP67, Wet, 20 AWG



FCB-3P-67
Female connector,
300mm (11.81in.) black cable,
3 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

0-10V Dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2A2	100W	220-240VAC	24V	Dry	293 *43 *30mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2D2	100w	220-240VAC	24V	Dry	293 *43 *30mm

Controller Options


Type	Code	Description	Environment	Size (L x W x H)
Controllers	M2+M3-3A	3 channels output, Max. 3A current per channel, up to 216W output power	Indoor	135 * 30 * 20 mm

Wiring Diagram

Non-dimmable

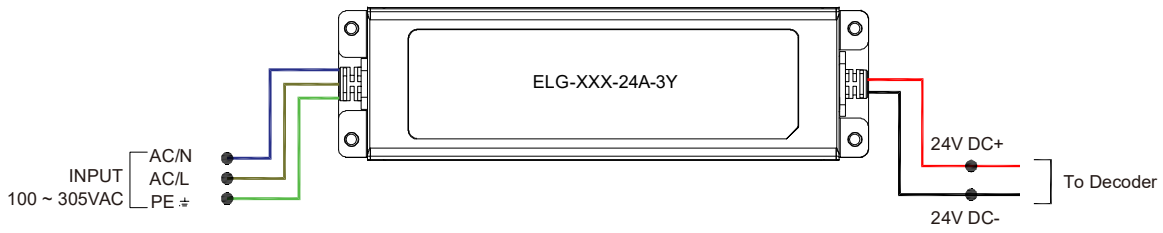

0-10V Dimmable

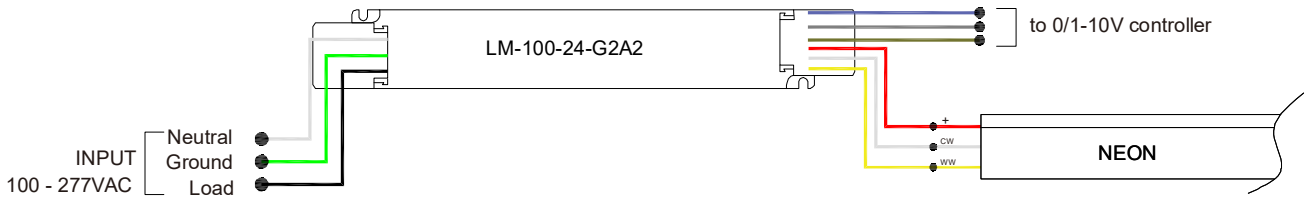

DALI-dimmable



LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m