Beamever

Designer's Custom Playground

LINIO NEON 1228X SV PIXEL RGBW

Horizontal Bending · Pixel RGBW

Date | Fixture type


Project name | Project phase

Features


- Dome top design, eye-catching from three viewing angles with addressable RGBW
- IP68 rated, ideal for outdoor uses, not for underwater project
- 3 years warranty

Applications


Museums, malls, amusement parks, restaurants, resorts, etc.

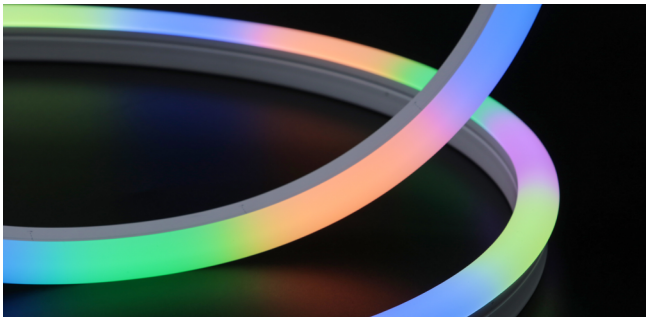

Bending Directions & Diameters



Dimensions





Order Code

Model	Environment	Voltage	CCT	Power	End Cap
LN1228XSV	**W8**-Wet (IP68)	**24V**-DC24V	**PRGBW27K**-Pixel RGBW2700K **PRGBW30K**-Pixel RGBW3000K **PRGBW35K**-Pixel RGBW3500K **PRGBW40K**-Pixel RGBW4000K	**150**-15W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry	
F Front	**OW** Open wire 300mm (11.81in.)
B Bottom	**OA** Open Wire with Anti-Wicking Ferrule
S Side	**MC** Male connector with 300mm (11.81in.) cable
C Closed	**FC** Female connector with 300mm (11.81in.)cable
	NA Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Length	
F	Front	**OW** Open wire 300mm (11.81in.)	**Max. nominal**	5m (16.4ft)
B	Bottom	**OA** Open Wire with Anti-Wicking Ferrule	**Increment**	83.3mm (3.28in.)
S	Side	**MC** Male connector with 300mm (11.81in.) cable		
C	Closed	**FC** Female connector with 300mm (11.81in.)cable		
		NA Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

LINIO NEON 1228X SV PIXEL RGBW

Horizontal Bending · Pixel RGBW

Lumen Output (lm/m)


CCT	15W/M
R	33
G	93
B	23
W27K	111
W30K	110
W35K	116
W40K	116
PRGBW27K	268
PRGBW30K	260
PRGBW35K	260
PRGBW40K	260
Max. Run Length	5m

Techinical Details

Efficacy	17.3lm/W @PRGBW30K 15W
CRI	Ra≥80
Beam Angle	110°
Average Life (L70B10)	>36,000 hours
IC Model	UCS 512CL
Pixel/M	12
Pixel Size	83mm/pixel
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

LN1228XSV-W8-24V-PRGBW30K-150-FT-F-OW-F-OW
LINIO NEON 1228X SV PIXEL RGBW, Horizontal bend, PRGBW30K, 15W/M

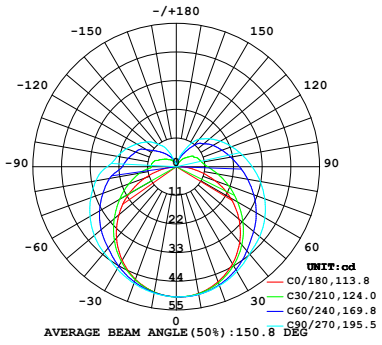

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	39.6	15.2%
0-40	66.0	25.4%
0-60	125.1	48.1%
0-90	198.1	76.2%
0-180	259.9	100.0%


LINIO NEON 1228X SV PIXEL RGBW

Horizontal Bending · Pixel RGBW


Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

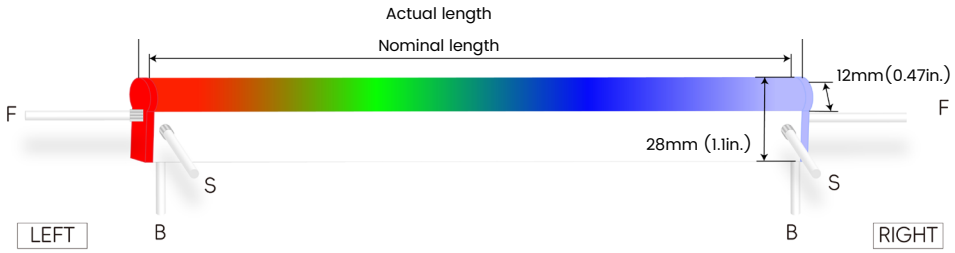





FO: Flush Opaque – IP68, factory-made only

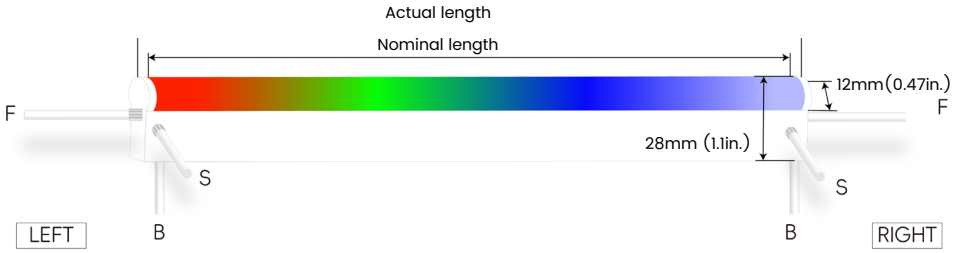



Silicone end cap – IP67, for field cuttable only

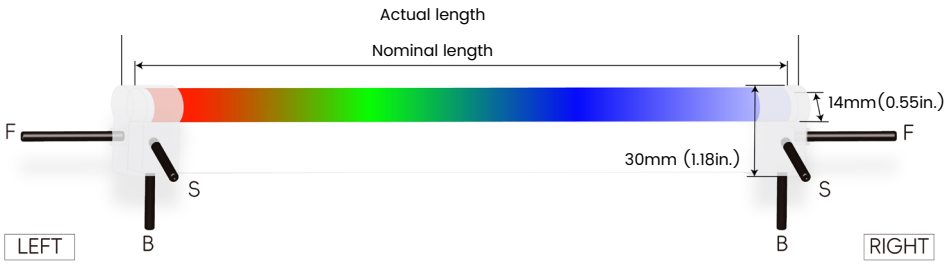





Connector Wire Options




OW: Open wire, **Dry only**
Standard 300mm (11.81in.),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 20 AWG



FC: Female connector, **Wet**
Standard 300mm (11.81in.), 20 AWG




OA: Open Wire with **Anti-Wicking Ferrule, Wet**
Standard 300mm (11.81in.),20 AWG,
Protects against water ingress through the power cable

LINIO NEON 1228X SV PIXEL RGBW

Horizontal Bending · Pixel RGBW


Mounting Options



NF1228-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1228-BC



Name	Bendable surface channel
Material	Stainless Steel
Standard Length	1m (3.28ft)
Min. Bending Diameter	300mm(11.81in.)
*Not suitable for upside-down installation	



NF1228-RC


Name	Straight recessed channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1228-BCA

Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	300mm(11.81in.)




NF1228-CL


Name	Mounting clip
Material	Stainless Steel
Standard Length	20mm(0.79in.)
*Not suitable for upside-down installation	

LINIO NEON 1228X SV PIXEL RGBW


Silicone End Caps (Optional, purchase for extra)



NF1228-SEC-C
Silicone closed end cap



NF1228-SEC-F-5P
Silicone end cap front entry with 300mm (11.81in.) cable, 5 pin



NF1228-SEC-S-5P
Silicone end cap side entry with 300mm (11.81in.) cable, 5 pin



NF1228-SEC-B-5P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 5 pin

Additional Accessories (Optional, purchase for extra)



MCW-5P-67
Male connector,
300mm (11.81in.) white cable,
5 pin, IP67, Wet, 22 AWG



FCW-5P-67
Female connector,
300mm (11.81in.) white cable,
5 pin, IP67, Wet, 22 AWG



MCB-5P-67
Male connector,
300mm (11.81in.) black cable,
5 pin, IP67, Wet, 22 AWG



FCB-5P-67
Female connector,
300mm (11.81in.) black cable,
5 pin, IP67, Wet, 22 AWG




SW-3P-6
Shielded signal wire,
standard 6m(20ft), customizable
3 pin, 18AWG



SC-3P-6
XLR3 extension signal connector,
standard 6m(20ft), customizable
3 pin



NC-6
RJ45 extension network connector,
standard 6m(20ft), customizable



MFTCW-5P-67
Male and female T-shaped connector,
white cable,
5 pin, IP67, Wet

LINIO NEON 1228X SV PIXEL RGBW

Drivers


Non-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

DMX-Decoders & Controllers Options

Type	Code	Description	Environment	Size (L x W x H)
Controllers	CW4	1024 DMX channels, 6 scene buttons and a color wheel, ideal for hotels, homes and public	Indoor	145 * 107 * 10 mm
Controllers	Artnet-DMX-8	8 DMX universes, Artnet- to-DMX512 converter with RJ45 port, ideal for lighting control	Indoor	483 * 200 * 44 mm
Controllers	WT-DMX-M	WiFi & RF 3-in-1 DMX512 controller for RGB/RGBW/RGBCCT lighting	Indoor	120 * 43 * 27 mm

Wiring Diagram

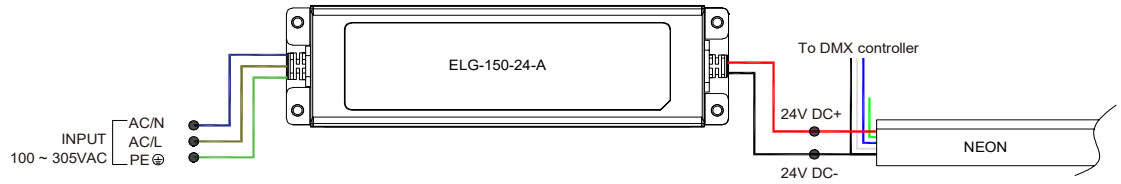

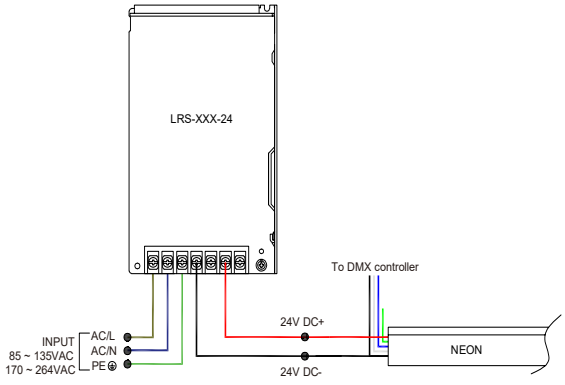

LINIO NEON 1228X SV PIXEL RGBW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m