LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White

Features


- 3-sides emitting design & Tunable white from 2700K to 5300K
- IP68 rated, ideal for outdoor uses, not for underwater project
- 5 years warranty

Date | Fixture type


Project name | Project phase

Applications


Gardens, parks, hotels, facades, pathways, outdoor steps, etc.

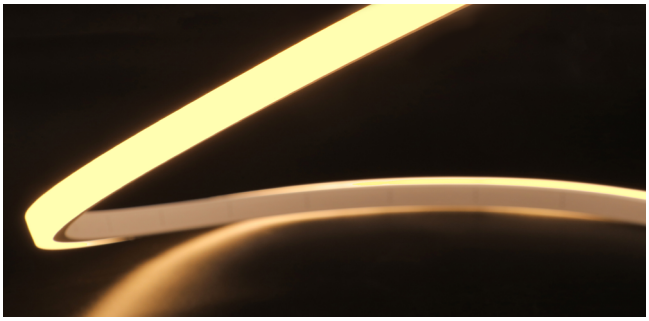


Bending Directions & Diameters



Dimensions



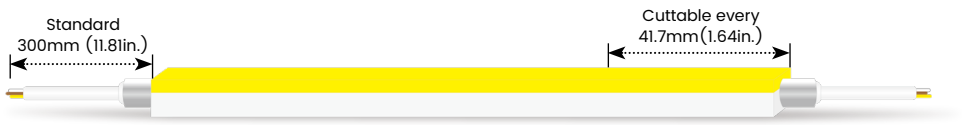

Order Code

Model	Environment	Voltage	CCT	Power	End Cap
LN1010X3STV	**W8**-Wet (IP68)	**24V**-DC24V	**27K53K**-2700K+5300K	**116**-11.6W/M	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 300mm (11.81in.)
B	Bottom	**OA**	Open Wire with Anti-Wicking Ferrule
S	Side	**MC**	Male connector with 300mm (11.81in.) cable
C	Closed	**FC**	Female connector with 300mm (11.81in.)cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 300mm (11.81in.)
B	Bottom	**OA**	Open Wire with Anti-Wicking Ferrule
S	Side	**MC**	Male connector with 300mm (11.81in.) cable
C	Closed	**FC**	Female connector with 300mm (11.81in.)cable
		NA	Only for Closed Feed Entry

Length	
Max. nominal	10m (32.8ft)
Increment	41.7mm (1.64in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White

Lumen Output (lm/m)


CCT	11.6W/M
2700K	380
5300K	390
2700K+5300K	770
Max. Run Length	10m

Techinical Details

Efficacy	66.4lm/W @2700K+5300K 11.6W
CRI	Ra≥90
Beam Angle	160°(3-sides emitting)
LED MacAdam	3 steps
Average Life (L70B10)	>43,000 hours
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

LN1010X3STV-W8-24V-27K53K-116-FT-F-OW-F-OW
LINIO NEON 1010X 3S TV TW, Vertical Bend, 2700K+5300K, 11.6W/M

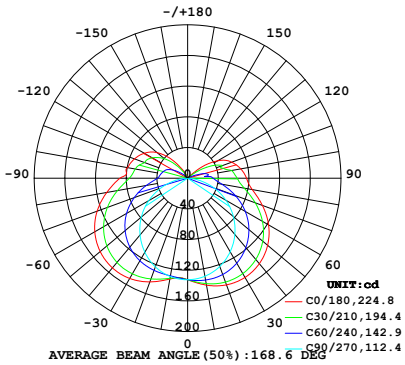

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	113.4	14.7%
0-40	195.3	25.3%
0-60	386.9	50.1%
0-90	615.3	79.7%
0-180	771.8	100.0%


LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White


Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

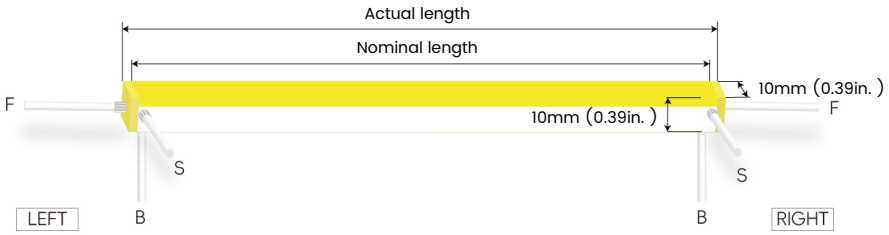





FO: Flush Opaque – IP68, factory-made only

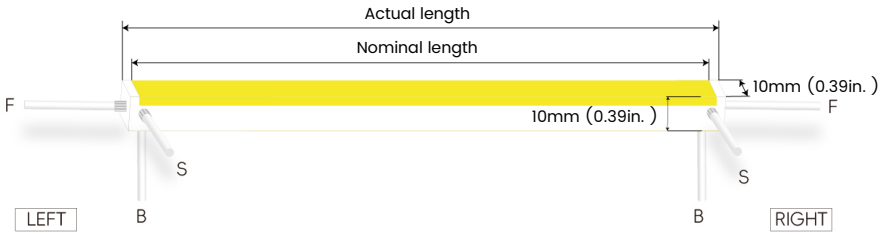



Silicone end cap – IP67, for field cuttable only

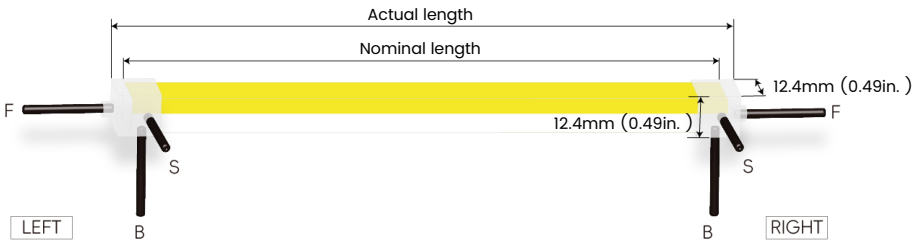





Connector Wire Options




OW: Open wire, **Dry only**
Standard 300mm (11.81in.),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 20 AWG




FC: Female connector, **Wet**
Standard 300mm (11.81in.), 20 AWG



OA: Open Wire with **Anti-Wicking Ferrule, Wet**
Standard 300mm (11.81in.),20 AWG,
Protects against water ingress through the power cable


Mounting Options



NF1010-SC


Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1010-BC



Name	Bendable surface channel
Material	Stainless Steel
Standard Length	1m (3.28ft)
Min. Bending Diameter	100mm(3.94in.)
*Not suitable for upside-down installation	



NF1010-MC


Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1010-IC


Name	Inside corner channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1010-OC


Name	Outside corner channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1010-SBC


Name	Skirting board channel
Material	Aluminum
Standard Length	1m (3.28ft)





NF1010-PC

Name	PC channel
Material	PC
Standard Length	1m (3.28ft)






NF1010-BPC


Name	Bendable PC channel
Material	PC
Standard Length	1m (3.28ft)

LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White

Mounting Options








NF1010-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)








NF1010-CLS

Name	Mounting clip
Material	Stainless Steel
Standard Length	7mm(0.28in.)
*Not suitable for upside-down installation	


LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White


Silicone End Caps (Optional, purchase for extra)



NF1010-SEC-C
Silicone closed end cap



NF1010-SEC-F-3P
Silicone end cap front entry with 300mm (11.81in.) cable, 3 pin



NF1010-SEC-S-3P
Silicone end cap side entry with 300mm (11.81in.) cable, 3 pin



NF1010-SEC-B-3P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 3 pin

Additional Accessories (Optional, purchase for extra)



MCW-3P-67
Male connector,
300mm (11.81in.)white cable,
3 pin, IP67, Wet, 20 AWG



FCW-3P-67
Female connector,
300mm (11.81in.) white cable,
3 pin, IP67, Wet, 20 AWG



MCB-3P-67
Male connector,
300mm (11.81in.) black cable,
3 pin, IP67, Wet, 20 AWG



FCB-3P-67
Female connector,
300mm (11.81in.) black cable,
3 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

0-10V Dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2A2	100W	220-240VAC	24V	Dry	293 *43 *30mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2D2	100w	220-240VAC	24V	Dry	293 *43 *30mm

Controller Options


Type	Code	Description	Environment	Size (L x W x H)
Controllers	M2+M3-3A	3 channels output, Max. 3A current per channel, up to 216W output power	Indoor	135 * 30 * 20 mm

Wiring Diagram

Non-dimmable

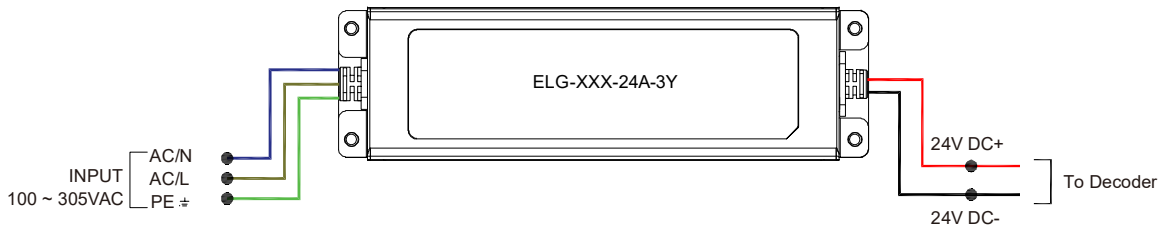

0-10V Dimmable

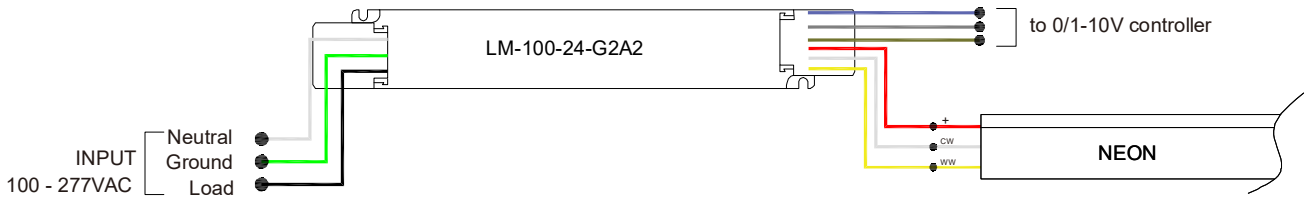

DALI-dimmable



LINIO NEON 1010X 3S TV TW

Outdoor · Vertical Bending · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m