Beamever

Designer's Custom Playground

AERO TAPE LONG RUN WET

Indoor · Static White

Features

- Long max run length up to 20m from single power feed
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty

Date

Fixture type

Project name

Project phase

Applications

Bathrooms, kitchens, balconies, roofs, soffits, awnings, etc.



Dimensions



Order Code

Model	Environment	Voltage	CCT	Power
AEROLR	**W5**-Wet (IP65)	**24V**-DC24V	**18K**-1800K **22K**-2200K **24K**-2400K **27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **65K**-6500K	**050**-5W/M **100**-10W/M **150**-15W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Length	
Increment	50mm (1.97in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Channel Order Code

Product Code	Colors*	Lens	Clip*	Length
Please select on the Extrusion Compatibility page	■ **S** Silver anodized □ **W** White lacquered ■ **B** Black anodized	**OP** Opal **FR** Frosted **CL** Clear	**MCL** Metal clip **PCL** Plastic clip **ACL** Adjustable angle clip	1m(3.28ft) 2m (6.56ft)

*For custom RAL colors, please inquire.
*Please refer to the Channel Compatibility page for compatible clip options.

AERO TAPE LONG RUN WET

Indoor · Static White

Lumen Output (lm/m)

CCT	5W/M	10W/M	15W/M
1800K	500	990	1480
2200K	520	1025	1530
2400K	535	1060	1585
2700K	565	1120	1675
3000K	585	1160	1730
3500K	590	1170	1750
4000K	610	1205	1805
6500K	595	1180	1765
Max. Run Length	20m	15m	11m

Techinical Details

Width	12mm (0.47in.)
LED Quantity	140 LEDs/M (42 LEDs/ft)
Beam Angle	120°
Efficacy	116lm/W @3000K 10W
CRI	Ra≥90
LED MacAdam	3 steps
Average Life (L70)	>54,000 hours
Max. Length Per Reel	10m(32.8ft)
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Feed Entry Options



F: Front

C: Closed

Connector Wire Options



OW: Open wire, **Dry only**
Standard 150mm(5.9in.),22 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 200mm(7.87in.), 22 AWG



FC: Female connector, **Wet**
Standard 200mm(7.87in.), 22 AWG

AERO TAPE LONG RUN WET

Indoor · Static White

Channel Compatibility

*Non-standard option, please contact us for customization support.

Lens Type & Light Transmission		
CL Clear	FR Frosted	OP Opal

Surface

BE1202	BE1919	BE2002	BE3030-S
CL 66% FR 60% OP 49%	CL 80% FR 73% OP 60%	CL 81% FR 74% OP 60%	CL 85% FR 78% OP 64%
			
Accommodates 1 LED strip	Accommodates 1 LED strip	Accommodates 1 LED strip	Accommodates 1 LED strip
Clip Options: Metal/Plastic/Adjustable angle clip	Clip Options: Metal clip	Clip Options: Metal/Plastic clip	Clip Options: Plastic clip

Recessed

BE1201	BE2001	BE5035	BE6575
CL 65% FR 60% OP 49%	CL 82% FR 75% OP 61%	CL 56% FR 51% OP 42%	CL 66% FR 60% OP 49%
			
Accommodates 1 LED strip	Accommodates 1 LED strip	Accommodates up to 2 LED strips	Accommodates up to 2 LED strips
Clip Options: Metal/Plastic clip	Clip Options: Metal/Plastic clip	Clip Options: Spring clip	Clip Options: N/A

AERO TAPE LONG RUN WET

Indoor · Static White

Corner

BE1203

CL 76% FR 69% OP 57%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

Suspended

BE3535

CL 58% FR 53% OP 33%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE5075

CL 65% FR 60% OP 49%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE60

CL 88% FR 80% OP 66%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

AERO TAPE LONG RUN WET

Indoor · Static White

Connectors & Additional Accessories(Optional, purchase for extra)



CL-10
Mounting clip,
for 10mm (0.39in.) tape



SEC-C-10-65
Closed silicone end cap,
for 10mm (0.39in.) tape
IP65 with glue sealing



JST-M-2P-67
Male connector,
200mm(7.87in.) red&black cable,
2 pin, IP67, 22 AWG



JST-F-2P-67
Female connector,
200mm(7.87in.) red&black cable,
2 pin, IP67, 22 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

AERO TAPE LONG RUN WET

Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram

Non-dimmable

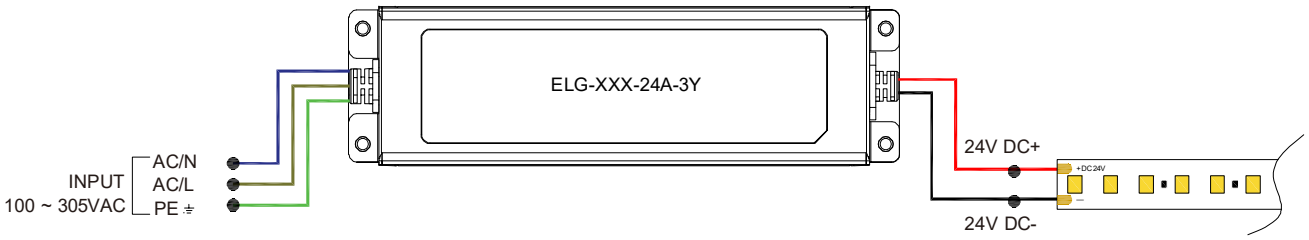

3 in 1-dimmable

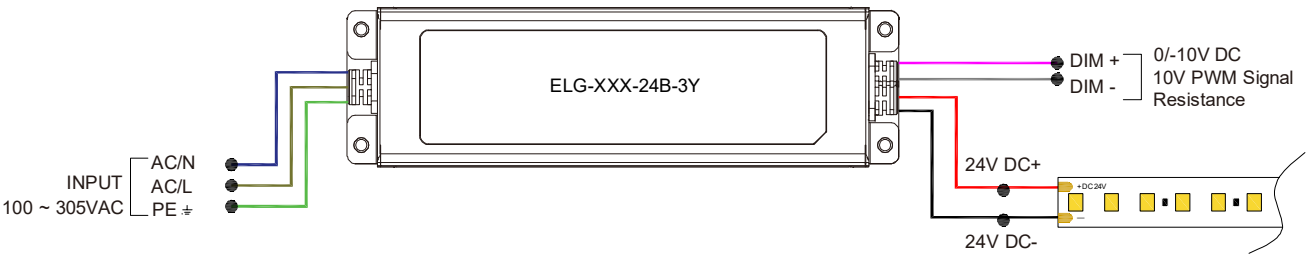

DALI-dimmable

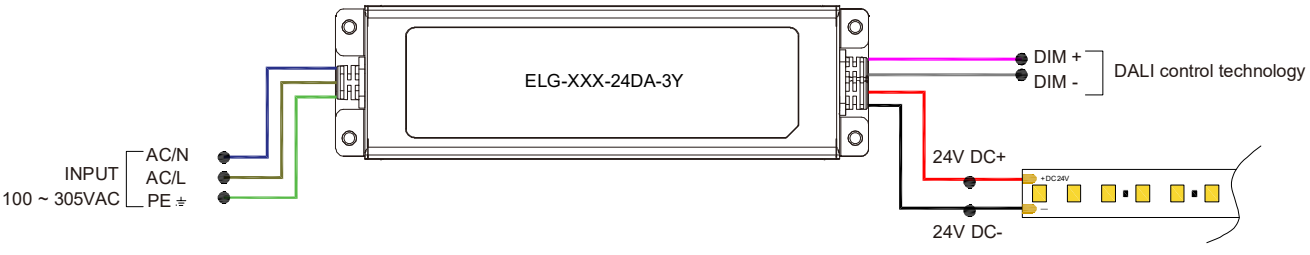

AERO TAPE LONG RUN WET

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m