Beamever

LINIO NEON 1617 3D POOL

Designer's Custom Playground

Underwater · 3D Bending · Static White

Features


- Reliable underwater performance with flexible 3D bending
- Uninterrupted light lines with single-feed runs up to 40m
- IP68 & IP69 rated, ideal for underwater and washdown use
- 5 years warranty

Date | Fixture type


Project name | Project phase

Applications


Pools, Fountains, Parkwaters, Ponds, Waterfeatures, etc.

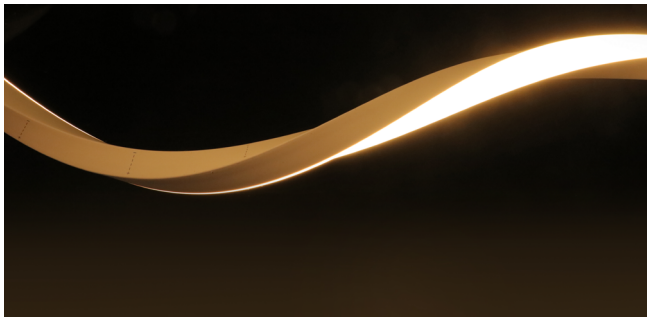

Dimensions



Bending Directions & Diameters

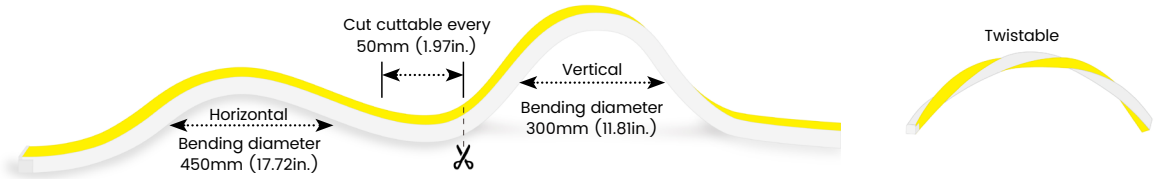

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry
LN16173DP	**W9**-Wet (IP69)	**24V**-DC24V	**22K**-2200K **27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **57K**-5700K	**096**-9.6W/M	**FT** Flush Translucent **FO** Flush Opaque	**F** Front, **B** Bottom, **S** Side, **C** Closed **OW** Open wire 300mm (11.81in.) **OA** Open Wire with Anti-Wicking Ferrule **MC** Male connector with 300mm (11.81in.) cable **FC** Female connector with 300mm (11.81in.)cable **NA** Only for Closed Feed Entry

Assembly Builder

Right Feed Entry				Length	
F	Front	**OW**	Open wire 300mm (11.81in.)	**Max. nominal**	40m (131.2ft)
B	Bottom	**OA**	Open Wire with Anti-Wicking Ferrule	**Increment**	50mm (1.97in.)
S	Side	**MC**	Male connector with 300mm (11.81in.) cable		
C	Closed	**FC**	Female connector with 300mm (11.81in.)cable		
		NA	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White

Lumen Output (lm/m)


CCT	9.6W/M
2200K	621
2700K	695
3000K	713
3500K	717
4000K	734
5700K	693
Max. Run Length	40m

Techinical Details

Efficacy	74lm/W @3000K 9.6W
CRI	Ra≥90
Beam Angle	110°
LED MacAdam	3 steps
IK Rating	IK10 (with aluminium profile)
Average Life (L70B10)	>44,000 hours
Storage Temperature	-40°C~ 65°C
Operating Temperature	-40°C~ 65°C

Photometry

LN16173DP-W9-24V-30K-096-FT-F-OW-F-OW
LINIO NEON 1617 3D POOL, 3D Bend, 3000K, 9.6W/M

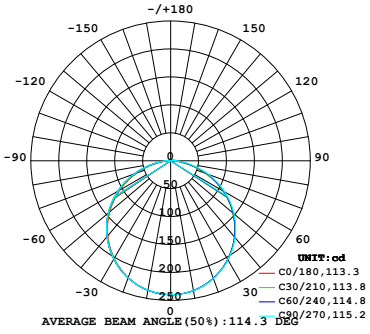

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	186.5	26.1%
0-40	306.1	42.9%
0-60	545.2	76.4%
0-90	700.2	98.1%
0-180	713.6	100.0%


LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White


Feed Entry / End Cap Options


FT: Flush Translucent – IP69, factory-made only

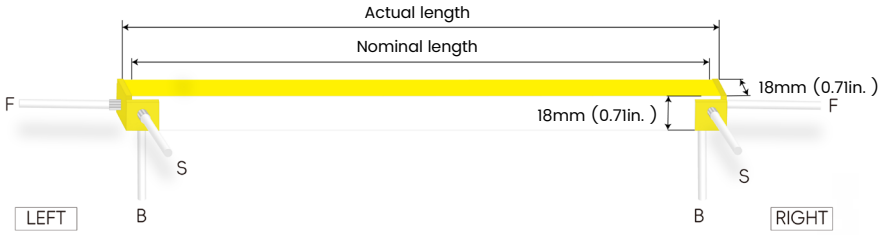





FO: Flush Opaque – IP69, factory-made only

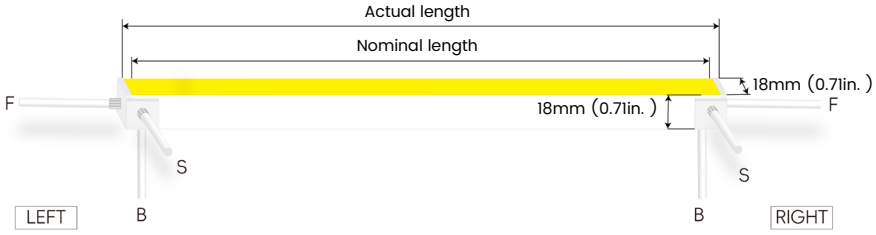





Silicone end cap – IP67, for field cuttable only, not for underwater use

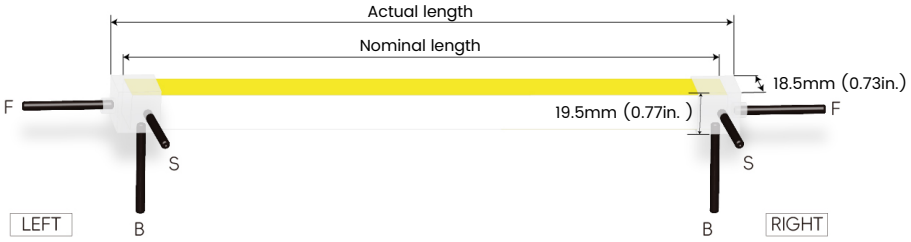



Mechanical end cap with screws – IP67, for field cuttable only, not for underwater use

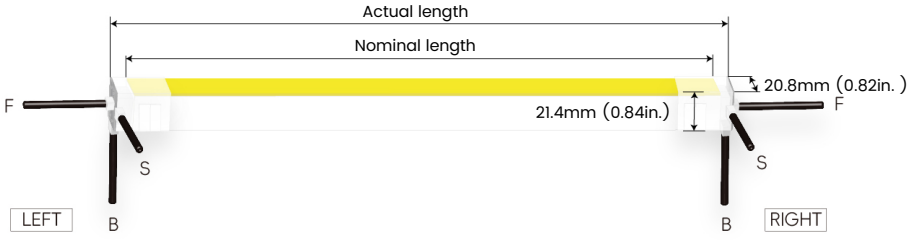





Connector Wire Options




OW: Open wire, **Dry only**
Standard 300mm (11.81in.),16 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 300mm (11.81in.), 16 AWG



FC: Female connector, **Wet**
Standard 300mm (11.81in.), 16 AWG




OA: Open Wire with **Anti-Wicking Ferrule, Wet**
Standard 300mm (11.81in.),16 AWG,
Protects against water ingress through the power cable

LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White


Mounting Options, for underwater use





NF1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	1m (3.28ft)









NF1617-BPC

Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	300mm(11.81in.)



Mounting Options, not for underwater use



NF1617-SC



Name	Straight surface channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BC


Name	Bendable surface channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Bending Diameter	600mm(23.6in.)



NF1617-RC



Name	Straight recessed channel
Material	Aluminum
Standard Length	1m (3.28ft)



NF1617-MC

Name	Mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)




NF1617-BMC


Name	Bendable mud-in channel
Material	Aluminum
Standard Length	1m (3.28ft)
Min. Top Bending Diameter	600mm(23.6in.)
Min. Side Bending Diameter	1600mm(63in.)

LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White

Mounting Options, not for underwater use









NF1617-SCS

Name	Straight surface channel
Material	Aluminum with silicone groove
Standard Length	1m (3.28ft)









NF1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	1m (3.28ft)








NF1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)










NF1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm(0.79in.)

* NF1617-LS must be installed with NF1617-SC











NF1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)

* NF1617-AC must be installed with NF1617-SC









NF1617-RC-SPC


Name	Spring clip
Standard Pkg	1pcs

* NF1617-RC-SPC must be installed with NF1617-RC


LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White


Silicone End Caps (Optional, purchase for extra,) — Not for underwater use



NF1617-SEC-C
Silicone closed end cap



NF1617-SEC-F-2P
Silicone end cap front entry with 300mm (11.81in.) cable, 2 pin




NF1617-SEC-S-2P
Silicone end cap side entry with 300mm (11.81in.) cable, 2 pin




NF1617-SEC-B-2P
Silicone end cap bottom entry with 300mm (11.81in.) cable, 2 pin


Mechanical End Caps (Optional, purchase for extra) — Not for underwater use




NF1617T-MEC-LF-2P
Mechanical end cap with screws, left front entry, 300mm (11.81in.) cable, 2 pin, IP67



NF1617T-MEC-RF-2P
Mechanical end cap with screws, right front entry, 300mm (11.81in.) cable, 2 pin, IP67



NF1617T-MEC-LS-2P
Mechanical end cap with screws, left side entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-RS-2P
Mechanical end cap with screws, right side entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-LB-2P
Mechanical end cap with screws, left bottom entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-RB-2P
Mechanical end cap with screws, right bottom entry, 300mm (11.81in.) cable, 2 pin, IP67




NF1617T-MEC-C
Mechanical closed end cap with screws, IP67



NF1617T-S-S-2P
Strip to strip connector, 2 pin, IP54



NF1617T-JC-F-2P
Jumper connector front entry, 150mm (5.9in.) cable, 2 pin, IP67



NF1617T-JC-S-2P
Jumper connector side entry, 150mm (5.9in.) cable, 2 pin, IP67



NF1617T-JC-B-2P
Jumper connector bottom entry, 150mm (5.9in.) cable, 2 pin, IP67

LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 16 AWG



FCW-2P-67
Female connector,
300mm (11.81in.) white cable,
2 pin, IP67, Wet, 16 AWG



MCB-2P-67
Male connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 16 AWG



FCB-2P-67
Female connector,
300mm (11.81in.) black cable,
2 pin, IP67, Wet, 16 AWG



BM-M16-2P
IP68 Waterproof connector



BM-M2068-2T
IP68 Junction Box

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram


Non-dimmable

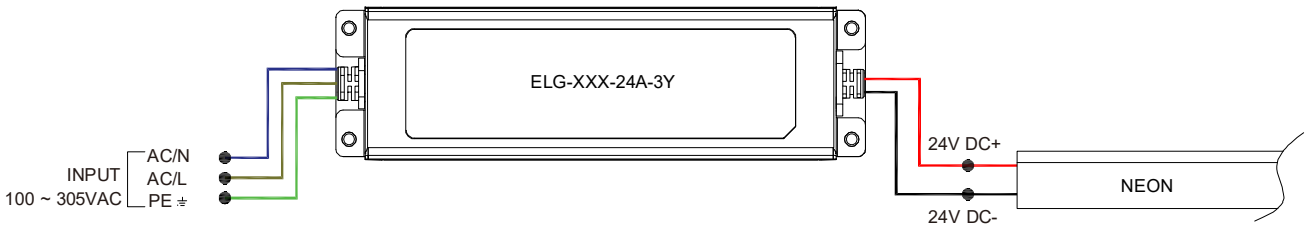

3 in 1-dimmable

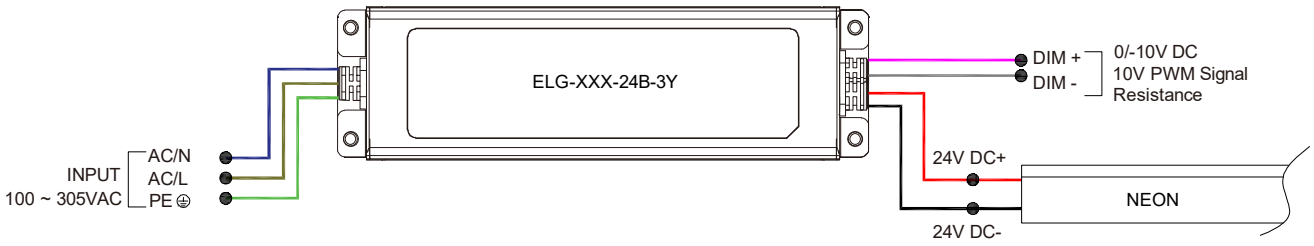

DALI-dimmable

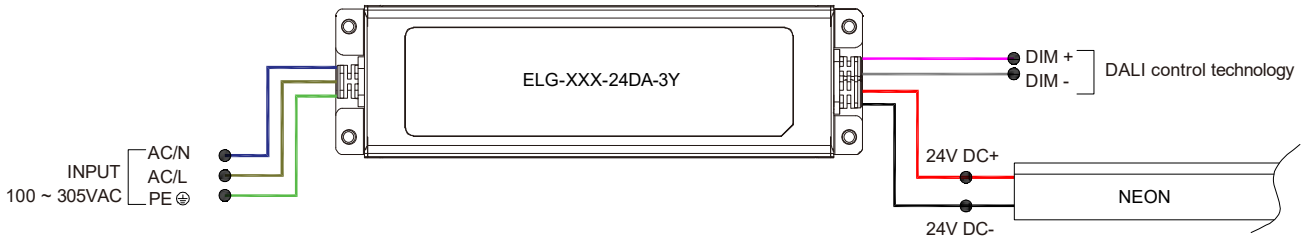

LINIO NEON 1617 3D POOL

Underwater · 3D Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m