Beamever

Designer's Custom Playground

ANNO TAPE WET X

Indoor · Static White

Features

- High-density, chip-on-board design provides uniform lighting
- IP67 rated, ideal for outdoor uses
- 5 years warranty

Date

Fixture type

Project name

Project phase

Applications

Gardens, parks, decks, patios, pathways, outdoor steps, etc.

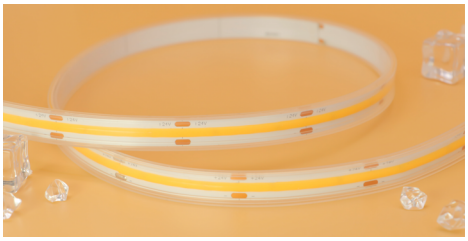

Dimensions



Order Code

Model	Environment	Voltage	CCT	Power
ANNO	**W7**-Wet (IP67)	**24V**-DC24V	**27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **65K**-6500K	**050**-5W/M **100**-10W/M **150**-15W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Length	
Increment	50mm (1.97in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Channel Order Code

Product Code	Colors*	Lens	Clip*	Length
Please select on the Extrusion Compatibility page	■ **S** Silver anodized □ **W** White lacquered ■ **B** Black anodized	**OP** Opal **FR** Frosted **CL** Clear	**MCL** Metal clip **PCL** Plastic clip **ACL** Adjustable angle clip	1m(3.28ft) 2m (6.56ft)

*For custom RAL colors, please inquire.
*Please refer to the Channel Compatibility page for compatible clip options.

ANNO TAPE WET X

Indoor · Static White

Lumen Output (lm/m)

CCT	5W/M	10W/M	15W/M
2700K	440	870	1250
3000K	470	920	1350
3500K	495	950	1420
4000K	520	1030	1470
6500K	510	1020	1460
Max. Run Length	8m	6m	5m

Techinical Details

Width	12mm (0.47in.)
LED Quantity	480 LEDs/M (146 LEDs/ft)
Beam Angle	150°
Efficacy	92lm/W @3000K 10W
CRI	Ra≥90
LED MacAdam	3 steps
Average Life (L70)	>54,000 hours
Max. Length Per Reel	10m(32.8ft)
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Feed Entry Options



F: Front



C: Closed

Connector Wire Options



OW: Open wire, **Dry only**
Standard 150mm(5.9in.),22 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 200mm(7.87in.), 22 AWG



FC: Female connector, **Wet**
Standard 200mm(7.87in.), 22 AWG

ANNO TAPE WET X

Indoor · Static White

Channel Compatibility

*Non-standard option, please contact us for customization support.

Lens Type & Light Transmission		
CL Clear	FR Frosted	OP Opal

Surface

BE1919

CL 65% FR 59% OP 48%



Accommodates 1 LED strip

Clip Options:
Metal clip

Mud-in

BE7615

CL 57% FR 52% OP 43%



Accommodates up to 2 LED strips

Clip Options:
N/A

ANNO TAPE WET X

Indoor · Static White

Recessed

BE1207	BE5035	BE6575
CL 46% FR 42% OP 34%	CL 42% FR 38% OP 31%	CL 51% FR 46% OP 38%
		
Accommodates 1 LED strip	Accommodates up to 2 LED strips	Accommodates up to 2 LED strips
Clip Options: Spring clip	Clip Options: Spring clip	Clip Options: N/A

Suspended

BE3535	BE5075	BE60
CL 44% FR 40% OP 33%	CL 50% FR 46% OP 38%	CL 78% FR 71% OP 58%
		
Accommodates up to 2 LED strips	Accommodates up to 2 LED strips	Accommodates up to 2 LED strips
Clip Options: Metal clip	Clip Options: Metal clip	Clip Options: Metal clip

ANNO TAPE WET X

Indoor · Static White

Connectors & Additional Accessories(Optional, purchase for extra)



CL-12
Mounting clip,
for 12mm (0.47in.) tape



SEC-C-12-67
Closed silicone end cap,
for 12mm (0.47in.) tape,
IP67 with glue sealing



JST-M-2P-67
Male connector,
200mm(7.87in.) red&black cable,
2 pin, IP67, 22 AWG



JST-F-2P-67
Female connector,
200mm(7.87in.) red&black cable,
2 pin, IP67, 22 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

ANNO TAPE WET X

Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram

Non-dimmable

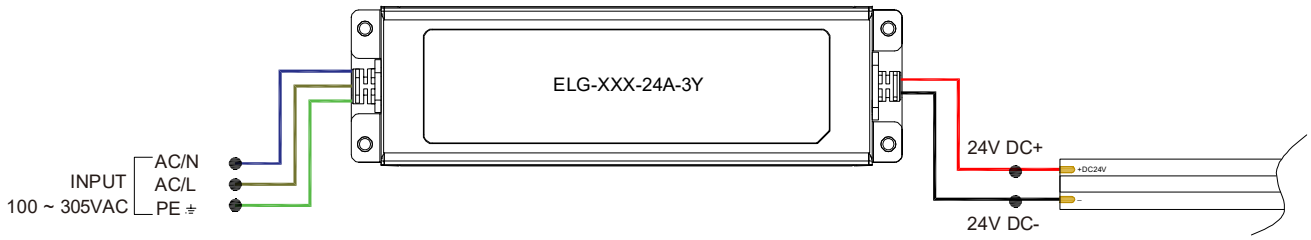

3 in 1-dimmable

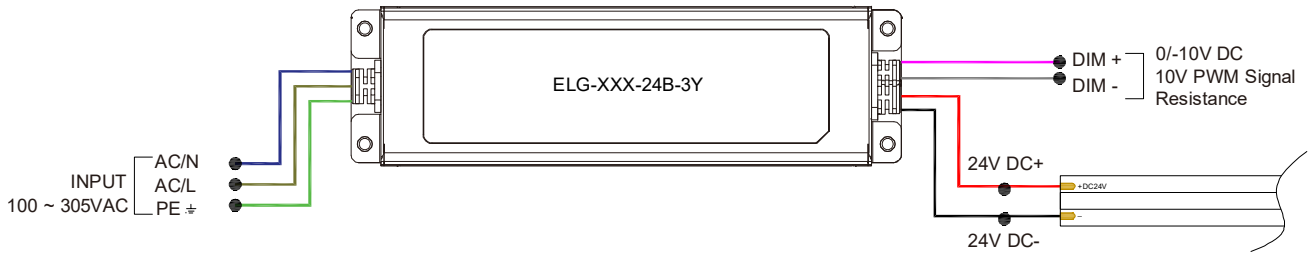

DALI-dimmable

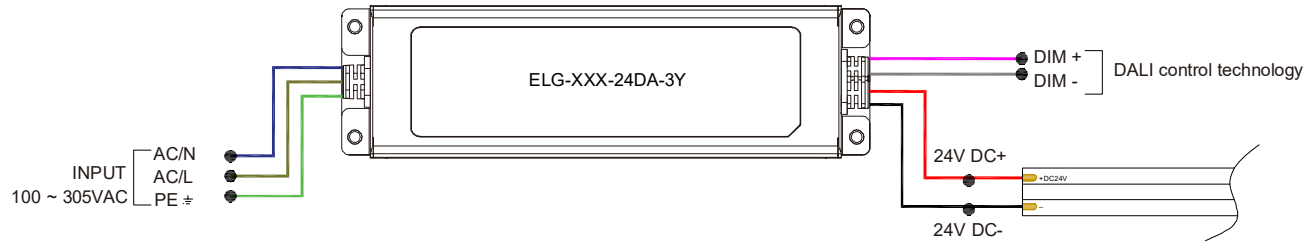

ANNO TAPE WET X

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m