AERO TAPE HD TW

Indoor · Static White

Features

- High density LED, tunable white from 2700K to 6500K
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Date

Fixture type

Project name

Project phase

Applications

Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Dimensions



Order Code

Model	Environment	Voltage	CCT	Power
AEROHD	**D2**-Dry (IP20)	**24V**-DC24V	**27K65K**-2700K+6500K	**240**-24W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Length	
Increment	25mm (0.98in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Channel Order Code

Product Code	Colors*	Lens	Clip*	Length
Please select on the Extrusion Compatibility page	■ **S** Silver anodized □ **W** White lacquered ■ **B** Black anodized	**OP** Opal **FR** Frosted **CL** Clear	**MCL** Metal clip **PCL** Plastic clip **ACL** Adjustable angle clip	1m(3.28ft) 2m (6.56ft)

*For custom RAL colors, please inquire.
*Please refer to the Channel Compatibility page for compatible clip options.

AERO TAPE HD TW

Indoor · Static White

Lumen Output (lm/m)

CCT	24W/M
2700K	1062
6500K	1140
2700K+6500K	2098
Max. Run Length	5m

Techinical Details

Width	10mm (0.39in.)
LED Quantity	240 LEDs/M (72 LEDs/ft)
Beam Angle	120°
Efficacy	87lm/W @2700K+6500K 24W
CRI	Ra≥90
LED MacAdam	3 steps
Average Life (L70)	>54,000 hours
Max. Length Per Reel	50m(164ft)
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Feed Entry Options



F: Front



C: Closed

Connector Wire Options



OW: Open wire, **Dry only**
Standard 150mm(5.9in.),20 AWG,
wire length customizable



MC: Male connector, **Dry**
Standard 200mm(7.87in.), 20 AWG



FC: Female connector, **Dry**
Standard 200mm(7.87in.), 20 AWG

AERO TAPE HD TW

Indoor · Static White

Channel Compatibility

*Non-standard option, please contact us for customization support.

Lens Type & Light Transmission		
CL Clear	FR Frosted	OP Opal

Surface

BE1202

CL 62% FR 51% OP 47%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic/Adjustable angle clip

BE1205

CL 84% FR 77% OP 63%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic/Adjustable angle clip

BE1206

CL 79% FR 72% OP 59%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1415

CL 55% FR 51% OP 41%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE1919

CL 77% FR 70% OP 58%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE2020

CL 79% FR 72% OP 59%



Accommodates 1 LED strip

Clip Options:
Metal clip

Mud-in

BE5615

CL 61% FR 56% OP 45%



Accommodates 1 LED strip

Clip Options:
N/A

BE7615

CL 72% FR 66% OP 54%



Accommodates up to 2 LED strips

Clip Options:
N/A

AERO TAPE HD TW

Indoor · Static White

Recessed

BE1201

CL 62% FR 57% OP 46%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1204

CL 83% FR 76% OP 62%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1207

CL 63% FR 58% OP 47%



Accommodates 1 LED strip

Clip Options:
Spring clip

BE2015

CL 61% FR 56% OP 46%



Accommodates 1 LED strip

Clip Options:
N/A

BE5035

CL 55% FR 50% OP 41%



Accommodates up to 2 LED strips

Clip Options:
Spring clip

BE6575

CL 65% FR 60% OP 49%



Accommodates up to 2 LED strips

Clip Options:
N/A

Corner

BE1002

CL 86% FR 79% OP 64%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1101

CL 60% FR 55% OP 45%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE1203

CL 75% FR 69% OP 56%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

AERO TAPE HD TW

Indoor · Static White

Suspended

BE3535

CL 56% FR 51% OP 42%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE5075

CL 64% FR 59% OP 48%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE60

CL 88% FR 80% OP 65%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

Specialty

BE1402
Wall lighting

CL 73% FR 67% OP 55%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE1403
Wall lighting

CL 77% FR 70% OP 57%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE1806
Bendable surface mounted

CL 90% FR 82% OP 67%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE2009
Coves

CL 57% FR 52% OP 43%



Accommodates 1 LED strip

Clip Options:
N/A

BE3511
Borderless Bi-Color Panel

CL 68% FR 62% OP 51%



Accommodates 1 LED strip

Clip Options:
N/A

BE4615
Borderless Inside Corner

CL 60% FR 55% OP 45%



Accommodates 1 LED strip

Clip Options:
N/A

BE5315
Borderless Outside Corner

CL 61% FR 55% OP 45%



Accommodates 1 LED strip

Clip Options:
N/A

BE6728
Staircase

CL 55% FR 50% OP 41%



Accommodates 1 LED strip

Clip Options:
N/A

Specialty (Continued)

BE6916
Recessed

CL 46% FR 42% OP 34%



Accommodates 1 LED strip

Clip Options:
Spring clip

BE7030
Cove Recessed Borderless

OP 61%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE8833
Cove Recessed / Double-Layer Borderless

CL 59% FR 54% OP 44%



Accommodates 1 LED strip

Clip Options:
N/A

BE12017
Toekick

CL 49% FR 45% OP 37%



Accommodates 1 LED strip

Clip Options:
N/A

BE13350
Coves

CL 44% FR 40% OP 33%



Accommodates 1 LED strip

Clip Options:
N/A

AERO TAPE HD TW

Indoor · Static White

Connectors (Optional, purchase for extra)

Max. Run Length - With Connector

Tape Power	24W/M
Max. Run Length	3.3m

*Note: Maximum current through the connector must not exceed 4A.



N6012-STCN-3P-10
Strip to cable connector without wire,
for 10mm (0.39in.) tape, 3 pin,IP20



N6012-STS-3P-10
Strip to strip connector,
for 10mm (0.39in.) tape, 3 pin,IP20



C6012-LC-3P-10
L-shaped corner connector,
for 10mm (0.39in.) tape, 3 pin,IP20



C6012-RC-3P-10
R-shaped corner connector,
for 10mm (0.39in.) tape, 3 pin,IP20



N6012-STC-3P-10
Strip to cable connector with 150mm (5.91in.) wire,
for 10mm (0.39in.) tape, 3 pin,IP20



N6012-STSJ-3P-10
Strip to strip jumper connector with 150mm(5.91in.) wire,
for 10mm (0.39in.) tape, 3 pin,IP20



N6012-STMKB-3P-10
Strip to cable with black female connector,
for 10mm (0.39in.) tape, 3 pin



N6012-STMKW-3P-10
Strip to cable with white female connector,
for 10mm (0.39in.) tape, 3 pin

Additional Accessories (Optional, purchase for extra)



MC-3P-20
Male connector,
200mm (7.87in.) red&black cable,
3 pin, IP20, 20 AWG



FC-3P-20
Female connector,
200mm (7.87in.) red&black cable,
3 pin, IP20, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

AERO TAPE HD TW

Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

0-10V Dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2A2	100W	220-240VAC	24V	Dry	293 *43 *30mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
LM-100-24-G2D2	100w	220-240VAC	24V	Dry	293 *43 *30mm

Controller Options

Type	Code	Description	Environment	Size (L x W x H)
Controllers	M2+M3-3A	3 channels output, Max. 3A current per channel, up to 216W output power	Indoor	135 * 30 * 20 mm

Wiring Diagram

Non-dimmable

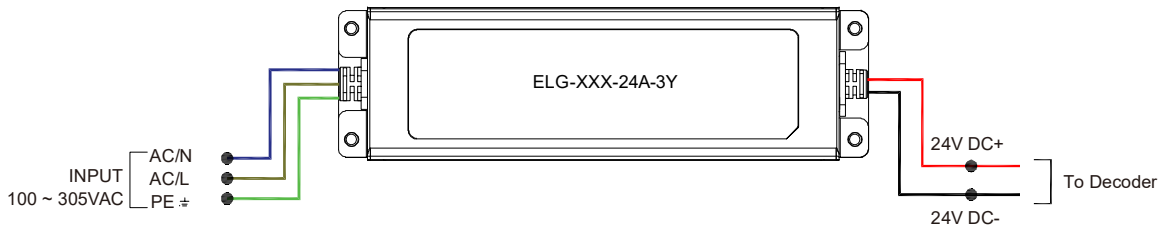

0-10V Dimmable

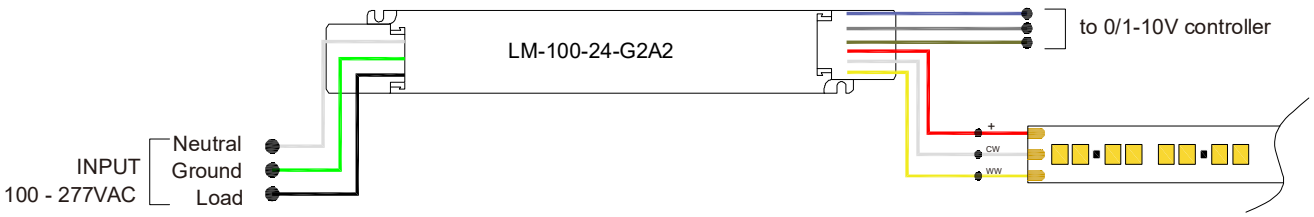

DALI-dimmable

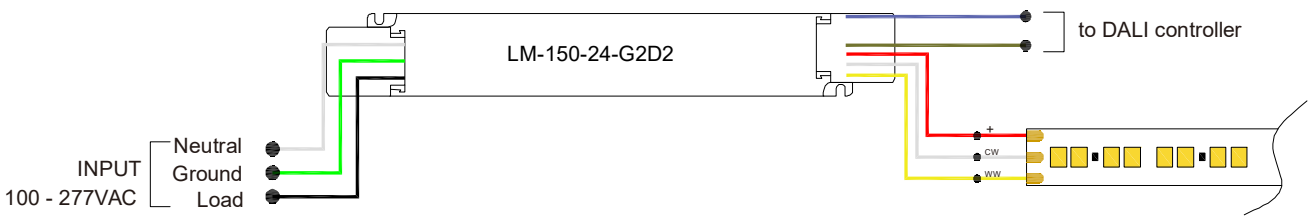

AERO TAPE HD TW

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m