Beamever

Designer's Custom Playground

AERO TAPE SAUNA

Indoor · Static White

Features

- Heat resistant SMD tape, designed for saunas
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty

Date

Fixture type

Project name

Project phase

Applications

Saunas, hot springs, bathhouse, resorts, etc.



Dimensions



Order Code

Model	Environment	Voltage	CCT	Power
AEROSN	**W5**-Wet (IP65)	**24V**-DC24V	**18K**-1800K **22K**-2200K **24K**-2400K **27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **50K**-5000K **65K**-6500K	**048**-4.8W/M **096**-9.6W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Length	
Increment	50mm (1.97in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

AERO TAPE SAUNA

Indoor · Static White

Lumen Output (lm/m)

CCT	4.8W/M	9.6W/M
1800K	490	980
2200K	510	1015
2400K	530	1050
2700K	560	1110
3000K	585	1158
3500K	585	1160
4000K	600	1195
5000K	595	1180
6500K	590	1170
Max. Run Length	7m	5m

Techinical Details

Width	10mm (0.39in.)
LED Quantity	120 LEDs/M (36 LEDs/ft)
Beam Angle	120°
Efficacy	121lm/W @3000K 9.6W
CRI	Ra≥80
LED MacAdam	3 steps
Average Life (L70)	>54,000 hours
Max. Length Per Reel	50m(164ft)
Storage Temperature	-25°C~ 100°C
Ambient Temperature	-25°C~ 100°C

Feed Entry Options



F: Front

C: Closed

Connector Wire Options



OW: Open wire, **Dry only**
Standard 150mm(5.9in.),22 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 200mm(7.87in.), 22 AWG



FC: Female connector, **Wet**
Standard 200mm(7.87in.), 22 AWG

AERO TAPE SAUNA

Indoor · Static White

Connectors & Additional Accessories(Optional, purchase for extra)



CL-10
Mounting clip,
for 10mm (0.39in.) tape



SEC-C-10-65
Closed silicone end cap,
for 10mm (0.39in.) tape
IP65 with glue sealing



JST-M-2P-67
Male connector,
200mm(7.87in.) red&black cable,
2 pin, IP67, 22 AWG



JST-F-2P-67
Female connector,
200mm(7.87in.) red&black cable,
2 pin, IP67, 22 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

AERO TAPE SAUNA

Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram

Non-dimmable

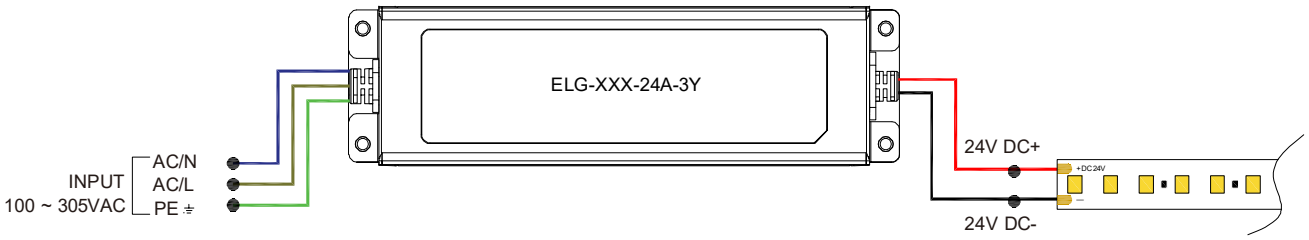

3 in 1-dimmable

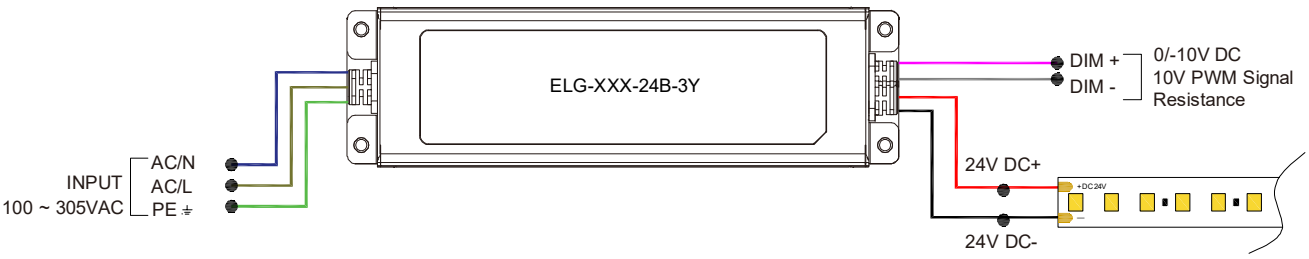

DALI-dimmable

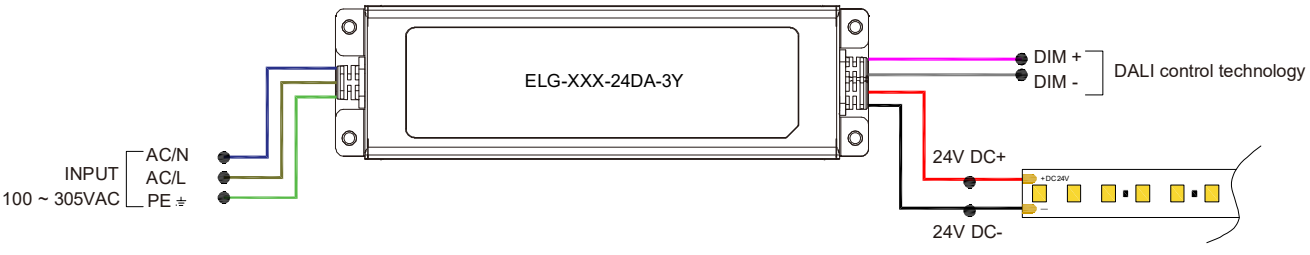

AERO TAPE SAUNA

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m