Beamever

ANNO TAPE

Indoor · Static White

Date | Fixture type

Project name | Project phase

Features

- High-density, chip-on-board design provides uniform lighting
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.

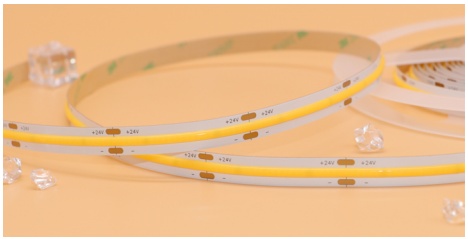

Dimensions



Order Code

Model	Environment	Voltage	CCT	Power
ANNO	**D2**-Dry (IP20)	**24V**-DC24V	**27K**-2700K **30K**-3000K **35K**-3500K **40K**-4000K **65K**-6500K	**050**-5W/M **100**-10W/M **150**-15W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Length	
Increment	50mm (1.97in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Channel Order Code

Product Code	Colors*	Lens	Clip*	Length
Please select on the Extrusion Compatibility page	**S** Silver anodized **W** White lacquered **B** Black anodized	**OP** Opal **FR** Frosted **CL** Clear	**MCL** Metal clip **PCL** Plastic clip **ACL** Adjustable angle clip	1m(3.28ft) 2m (6.56ft)

*For custom RAL colors, please inquire.
*Please refer to the Channel Compatibility page for compatible clip options.

ANNO TAPE

Indoor · Static White

Lumen Output (lm/m)

CCT	5W/M	10W/M	15W/M
2700K	575	1150	1725
3000K	600	1200	1800
3500K	612	1225	1835
4000K	625	1250	1875
6500K	625	1250	1875
Max. Run Length	8m	6m	5m

Techinical Details

Width	10mm (0.39in.)
LED Quantity	480 LEDs/M (146 LEDs/ft)
Beam Angle	180°
Efficacy	120lm/W @3000K 10W
CRI	Ra≥90
LED MacAdam	3 steps
Average Life (L70)	>54,000 hours
Max. Length Per Reel	50m(164ft)
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Feed Entry Options



F: Front



C: Closed

Connector Wire Options



OW: Open wire, **Dry only**
Standard 150mm(5.9in.),20 AWG,
wire length customizable



MC: Male connector, **Dry**
Standard 200mm(7.87in.), 20 AWG



FC: Female connector, **Dry**
Standard 200mm(7.87in.), 20 AWG

Channel Compatibility

*Non-standard option, please contact us for customization support.

Lens Type & Light Transmission		
CL Clear	FR Frosted	OP Opal

Surface

BE1202

CL 54% FR 50% OP 41%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic/Adjustable angle clip

BE1205

CL 77% FR 72% OP 61%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic/Adjustable angle clip

BE1415

CL 46% FR 42% OP 34%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE1919

CL 69% FR 63% OP 51%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE2020

CL 69% FR 63% OP 51%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE2601

CL 77% FR 70% OP 58%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

Mud-in

BE5615

CL 53% FR 49% OP 40%



Accommodates 1 LED strip

Clip Options:
N/A

BE7615

CL 63% FR 58% OP 47%



Accommodates up to 2 LED strips

Clip Options:
N/A

Recessed

BE1201

CL 54% FR 50% OP 41%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1207

CL 54% FR 49% OP 40%



Accommodates 1 LED strip

Clip Options:
Spring clip

BE2015

CL 47% FR 43% OP 35%



Accommodates 1 LED strip

Clip Options:
N/A

BE5035

CL 47% FR 43% OP 35%



Accommodates up to 2 LED strips

Clip Options:
Spring clip

BE6575

CL 59% FR 54% OP 44%



Accommodates up to 2 LED strips

Clip Options:
N/A

Corner

BE1001

CL 82% FR 75% OP 61%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1002

CL 82% FR 75% OP 61%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1101

CL 49% FR 45% OP 37%



Accommodates 1 LED strip

Clip Options:
Metal clip

Suspended

BE3535

CL 49% FR 44% OP 36%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE5075

CL 59% FR 54% OP 44%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE60

CL 86% FR 78% OP 64%



Accommodates up to 2 LED strips

Clip Options:
Metal clip

Specialty

BE1806
Bendable surface mounted

CL 82% FR 75% OP 62%



Accommodates 1 LED strip

Clip Options:
Metal clip

BE2009
Coves

CL 49% FR 45% OP 36%



Accommodates 1 LED strip

Clip Options:
N/A

BE4615
Borderless Inside Corner

CL 53% FR 48% OP 40%



Accommodates 1 LED strip

Clip Options:
N/A

BE5315
Borderless Outside Corner

CL 53% FR 48% OP 39%



Accommodates 1 LED strip

Clip Options:
N/A

BE6728
Staircase

CL 47% FR 42% OP 35%



Accommodates 1 LED strip

Clip Options:
N/A

BE7030
Cove Recessed Borderless

OP 58%



Accommodates 1 LED strip

Clip Options:
N/A

BE8833
Cove Recessed / Double-Layer Borderless

CL 55% FR 50% OP 41%



Accommodates 1 LED strip

Clip Options:
N/A

Connectors (Optional, purchase for extra)

Max. Run Length - With Connector

Tape Power	5W/M	10W/M	15W/M
Max. Run Length	8.0m	6.0m	5.0m

*Note: Maximum current through the connector must not exceed 4A.



N14CO-STCN-2P-10
Strip to cable connector without wire,
for 10mm (0.39in.) tape, 2 pin,IP20



N14CO-STS-2P-10
Strip to strip connector,
for 10mm (0.39in.) tape, 2 pin,IP20



C14CO-LC-2P-10
L-shaped corner connector,
for 10mm (0.39in.) tape, 2 pin,IP20



C14CO-RC-2P-10
R-shaped corner connector,
for 10mm (0.39in.) tape, 2 pin,IP20



N14CO-STC-2P-10
Strip to cable connector with 150mm (5.91in.) wire,
for 10mm (0.39in.) tape, 2 pin,IP20



N14CO-STSJ-2P-10
Strip to strip jumper connector with 150mm(5.91in.) wire,
for 10mm (0.39in.) tape, 2 pin,IP20



N14CO-STDCB-2P-10
Strip to cable with black female connector,
for 10mm (0.39in.) tape, 2 pin,IP20



N14CO-STDCW-2P-10
Strip to cable with white female connector,
for 10mm (0.39in.) tape, 2 pin,IP20

Additional Accessories (Optional, purchase for extra)



MC-2P-20
Male connector,
200mm (7.87in.) red&black cable,
2 pin, IP20, 20 AWG



FC-2P-20
Female connector,
200mm (7.87in.) red&black cable,
2 pin, IP20, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

Drivers

Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

3 in 1-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

DALI-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

Wiring Diagram

Non-dimmable

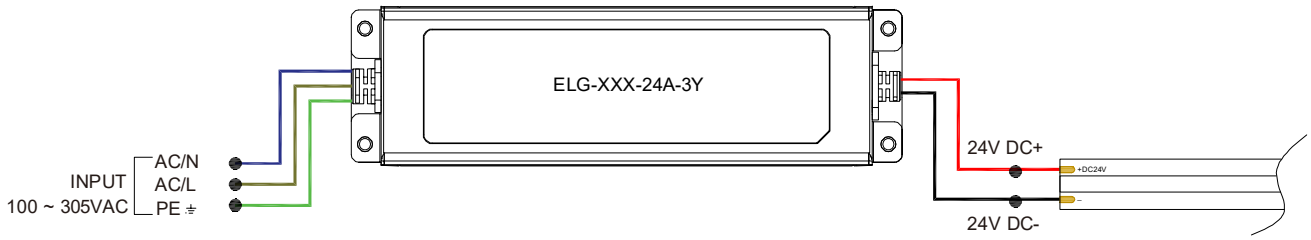

3 in 1-dimmable

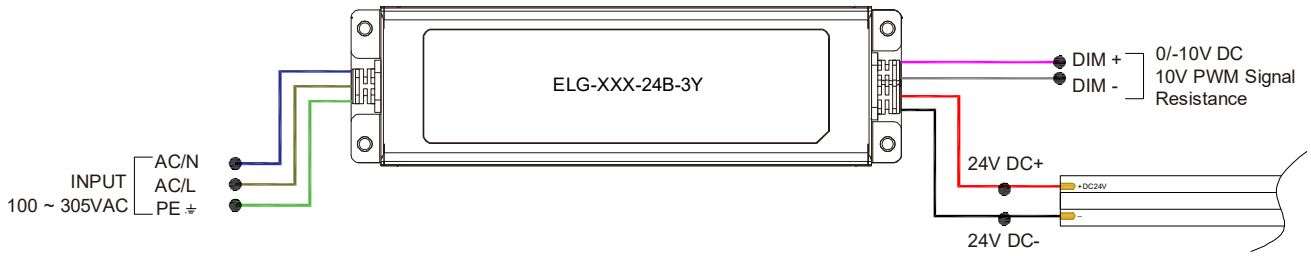

DALI-dimmable

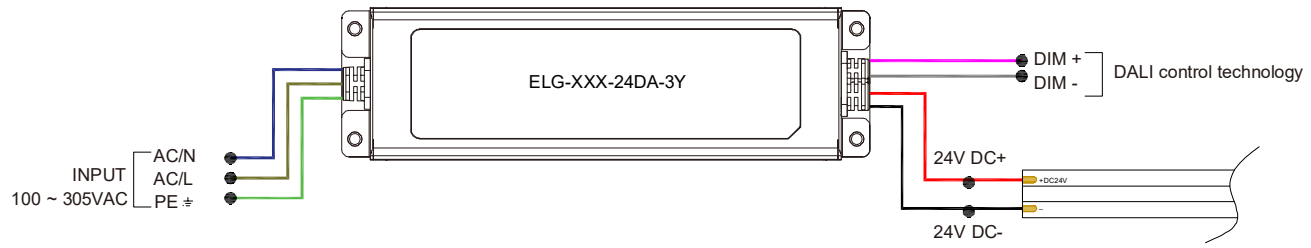

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m