Beamever

Designer's Custom Playground

ANNO TAPE RGBWW

Indoor · RGBWW

Features

- High-density dot-free COB tape with changeable RGBWW colors
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Date

Fixture type

Project name


Project phase


Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.



Dimensions





Order Code

Model	Environment	Voltage	CCT	Power
ANNO	**D2**-Dry (IP20)	**24V**-DC24V	**RGBWW27K65K**-RGBWW(WW=2700K+6500K)	**160**-16W/M

Assembly Builder

Left Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			
F	Front	**OW**	Open wire 150mm(5.9in.)
C	Closed	**MC**	Male connector with 200mm(7.87in.) cable
		FC	Female connector with 200mm(7.87in.) cable
		NA	Only for Closed Feed Entry

Length	
Increment	62.5mm (2.46in.)

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Channel Order Code

Product Code	Colors*	Lens	Clip*	Length
Please select on the Extrusion Compatibility page	**S** Silver anodized **W** White lacquered **B** Black anodized	**OP** Opal **FR** Frosted **CL** Clear	**MCL** Metal clip **PCL** Plastic clip **ACL** Adjustable angle clip	1m(3.28ft) 2m (6.56ft)

*For custom RAL colors, please inquire.
*Please refer to the Channel Compatibility page for compatible clip options.

ANNO TAPE RGBWW

Indoor · RGBWW

Lumen Output (lm/m)

CCT	16W/M
R	80
G	350
B	60
W27K	250
W65K	255
RGBWW27K65K	960
Max. Run Length	5m

Techinical Details

Width	12mm (0.47in.)
LED Quantity	560 LEDs/M (170 LEDs/ft)
Beam Angle	180°
Efficacy	60lm/W @RGBWW27K65K 16W
Average Life (L70)	>30,000 hours
Max. Length Per Reel	10m(32.8ft)
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Feed Entry Options




F: Front




C: Closed


Connector Wire Options



OW: Open wire, **Dry only**
Standard 150mm(5.9in.),20 AWG,
wire length customizable



MC: Male connector, **Dry**
Standard 200mm(7.87in.), 20 AWG



FC: Female connector, **Dry**
Standard 200mm(7.87in.), 20 AWG

ANNO TAPE RGBWW

Indoor · RGBWW

Channel Compatibility


*Non-standard option, please contact us for customization support.

Lens Type & Light Transmission		
CL Clear	FR Frosted	OP Opal

Surface

BE1202

CL 53% FR 48% OP 40%




Accommodates 1 LED strip

Clip Options:
Metal/Plastic/Adjustable angle clip

BE1206

CL 69% FR 63% OP 51%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE1415

CL 61% FR 55% OP 45%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE1910

CL 66% FR 60% OP 49%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE2020

CL 67% FR 61% OP 50%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE2601

CL 75% FR 69% OP 56%




Accommodates up to 2 LED strips

Clip Options:
Metal clip

Mud-in

BE5615

CL 50% FR 46% OP 38%




Accommodates 1 LED strip

Clip Options:
N/A

BE7615

CL 63% FR 57% OP 47%



Accommodates up to 2 LED strips

Clip Options:
N/A


ANNO TAPE RGBWW

Indoor · RGBWW

Recessed

BE1201

CL 52% FR 47% OP 39%




Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip

BE1207

CL 52% FR 47% OP 39%




Accommodates 1 LED strip

Clip Options:
Spring clip

BE2015

CL 54% FR 49% OP 40%




Accommodates 1 LED strip

Clip Options:
N/A

BE2810

CL 68% FR 62% OP 51%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE5035

CL 45% FR 41% OP 33%




Accommodates up to 2 LED strips

Clip Options:
Spring clip

BE6575

CL 58% FR 53% OP 44%




Accommodates up to 2 LED strips

Clip Options:
N/A

Corner

BE1203

CL 69% FR 63% OP 52%



Accommodates 1 LED strip

Clip Options:
Metal/Plastic clip


ANNO TAPE RGBWW

Indoor · RGBWW

Suspended

BE3535

CL 46% FR 42% OP 35%




Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE5075

CL 56% FR 51% OP 42%




Accommodates up to 2 LED strips

Clip Options:
Metal clip

BE60

CL 84% FR 77% OP 63%




Accommodates up to 2 LED strips

Clip Options:
Metal clip

Specialty

BE1402
Wall lighting

CL 46% FR 42% OP 34%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE1403
Wall lighting

CL 66% FR 60% OP 49%




Accommodates 1 LED strip

Clip Options:
Metal clip

BE3511
Borderless Bi-Color Panel

CL 57% FR 52% OP 42%




Accommodates 1 LED strip

Clip Options:
N/A

BE4615
Borderless Inside Corner

CL 51% FR 46% OP 38%




Accommodates 1 LED strip

Clip Options:
N/A

BE5315
Borderless Outside Corner

CL 49% FR 45% OP 37%







Accommodates 1 LED strip


Clip Options:
N/A

ANNO TAPE RGBWW


Indoor · RGBWW

Specialty (Continued)			
BE6728 Staircase	**BE6916** Recessed	**BE12017** Toekick	**BE13350** Coves
CL 36% FR 33% OP 27%	CL 51% FR 46% OP 38%	CL 42% FR 38% OP 31%	CL 28% FR 26% OP 21%
			
Accommodates 1 LED strip	Accommodates 1 LED strip	Accommodates 1 LED strip	Accommodates 1 LED strip
Clip Options: N/A	Clip Options: Spring clip	Clip Options: N/A	Clip Options: N/A

Additional Accessories (Optional, purchase for extra)



MC-6P-20
Male connector,
200mm (7.87in.) cable,
6 pin, IP20, 20 AWG



FC-6P-20
Female connector,
200mm (7.87in.) cable,
6 pin, IP20, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

ANNO TAPE RGBWW

Indoor · RGBWW

Drivers


Non-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

DMX-Decoders & Controllers Options

Type	Code	Description	Environment	Size (L x W x H)
DMX Decoders	D5-F	5 channels output, Max. 6A current per channel, up to 1440W output power	Indoor	169 * 80 * 39 mm
Controllers	EX5S	DMX512 output	Indoor	86 * 86 * 36 mm
Signal Amplifier	LT-123	DMX(485) signal amplifier, 1 input / 3 outputs	Indoor	192 * 80 * 41 mm

Wiring Diagram

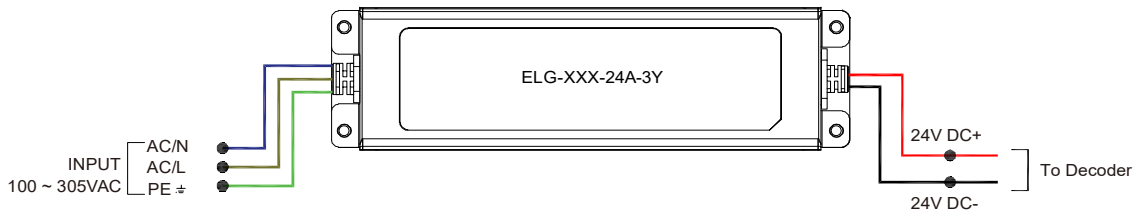

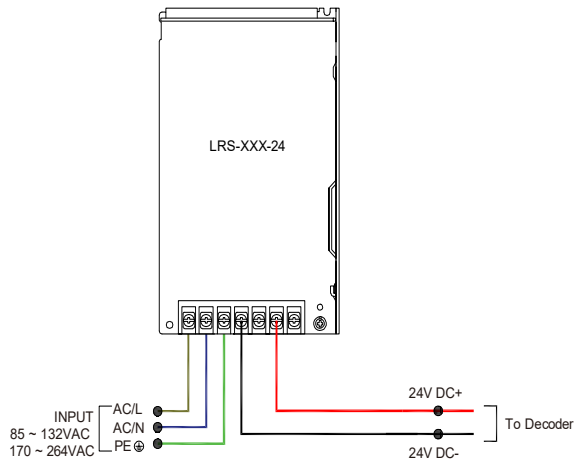

ANNO TAPE RGBWW

Indoor · RGBWW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m