Beamever

Designer's Custom Playground

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Features

- Premium silicone material & Tunable white from 2700K to 5000K
- IP67 rated, ideal for outdoor uses
- 5 years warranty

Date | Fixture type


Project name | Project phase

Applications


Gardens, parks, hotels, facades, pathways, outdoor steps, etc.




Bending Directions & Diameters



Dimensions



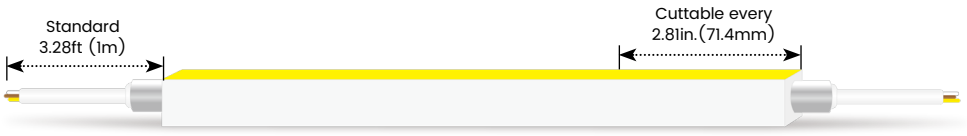

Order Code

Model	Environment	Voltage	CCT	Power	End Cap
LN0612XSV	**W7**-Wet (IP67)	**24V**-DC24V	**27K50K**-2700K+5000K	**4.0**-3.96W/ft	**FT** Flush Translucent **FO** Flush Opaque

Assembly Builder

Left Feed Entry		
F	Front	**OW** Open wire 3.28ft (1m)
B	Bottom	**MC** Male connector with 11.81in. (300mm) cable
S	Side	**FC** Female connector with 11.81in. (300mm)cable
C	Closed	**NA** Only for Closed Feed Entry

Assembly Builder

Right Feed Entry		
F	Front	**OW** Open wire 3.28ft (1m)
B	Bottom	**MC** Male connector with 11.81in. (300mm) cable
S	Side	**FC** Female connector with 11.81in. (300mm)cable
C	Closed	**NA** Only for Closed Feed Entry

Length	
Max. nominal	32.8ft (10m)
Increment	2.81in. (71.4mm)

Mounting Order Code

Product Code
Please select on the Mounting Options page

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Lumen Output (lm/ft)

CCT	3.96W/ft
2700K	85
5000K	89
2700K+5000K	172
Max. Run for Class 2*	20.2ft (6.2m)
Max. Run Supported Length	32.8ft (10m)


*Typically installations in USA and Canada comply with Class 2 requirements

Techinical Details

Efficacy	43lm/W @2700K+5000K 3.96W
CRI	Ra≥90
LED MacAdam	2 steps
Average Life (L80B10)	>56,000 hours
Storage Temperature	-40°F~140°F (-40°C~ 60°C)
Operating Temperature	-40°F~113°F (-40°C~ 45°C)

Photometry

LN0612XSV-W7-24V-27K50K-4.0-FT-F-OW-F-OW
LINIO NEON 0612X SV TW, Horizontal Bend, 2700K+5000K, 3.96W/ft

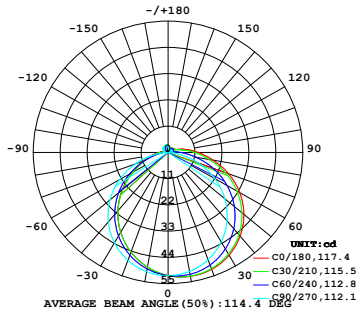

Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	40.2	23.3%
0-40	66.0	38.3%
0-60	118.0	68.5%
0-90	159.4	92.6%
0-180	172.2	100.0%


LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White


Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

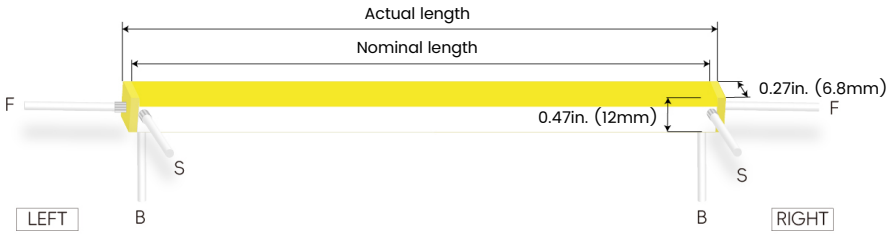





FO: Flush Opaque – IP67, factory-made only

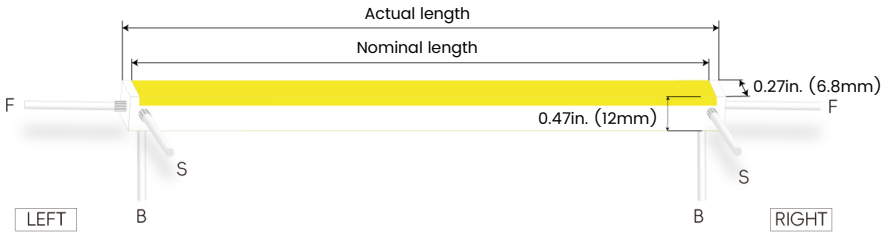



Silicone end cap – IP67, for field cuttable only

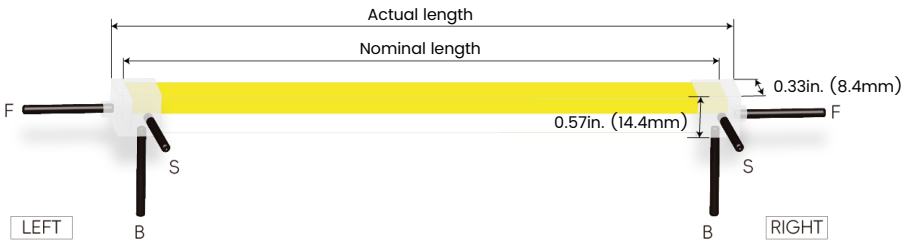





Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m),20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 11.81in. (300mm), 20 AWG





FC: Female connector, **Wet**
Standard 11.81in. (300mm), 20 AWG

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Mounting Options








NF0612-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1m)









NF0612-BC

Name	Bendable surface channel
Material	Stainless Steel
Standard Length	3.28ft (1m)
Min. Bending Radius	2.36in. (60mm)
*Not suitable for upside-down installation	








NF0612-CL

Name	Mounting clip
Material	Aluminum
Standard Length	0.98in.(25mm)








NF0612-CLS

Name	Mounting clip
Material	Stainless Steel
Standard Length	0.59in.(15mm)
*Not suitable for upside-down installation	


LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White


Silicone End Caps (Optional, purchase for extra)



NF0612-SEC-C
Silicone closed end cap



NF0612-SEC-F-3P
Silicone end cap front entry with 11.81in. (300mm) cable, 3 pin



NF0612-SEC-S-3P
Silicone end cap side entry with 11.81in. (300mm) cable, 3 pin



NF0612-SEC-B-3P
Silicone end cap bottom entry with 11.81in. (300mm) cable, 3 pin

Additional Accessories (Optional, purchase for extra)



MCW-3P-67
Male connector,
11.81in. (300mm)white cable,
3 pin, IP67, Wet, 20 AWG



FCW-3P-67
Female connector,
11.81in. (300mm) white cable,
3 pin, IP67, Wet, 20 AWG



MCB-3P-67
Male connector,
11.81in. (300mm) black cable,
3 pin, IP67, Wet, 20 AWG



FCB-3P-67
Female connector,
11.81in. (300mm) black cable,
3 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KV-24060-ASW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KV-24096-ASW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)


DMX-dimmable


Code	Max Load	Input	Output	Class 2	Environment	Size (L x W x H)
KVX-24096-2C-A	96W	100-277VAC	24V	Yes	Dry/Damp/Wet	9.05 × 3.07 × 0.98 in. (230 × 78 × 25 mm)
KVX-24150-2C-A	150W	100-277VAC	24V	No	Dry/Damp/Wet	10.90 × 3.07 × 0.98 in. (277 × 78 × 25 mm)
KVX-24200-2C-A	200W	100-277VAC	24V	No	Dry/Damp/Wet	10.90 × 3.07 × 0.98 in. (277 × 78 × 25 mm)
KVX-24300-2C-A	300W	100-277VAC	24V	No	Dry/Damp/Wet	11.85 × 3.07 × 0.98 in. (301 × 78 × 25 mm)

DMX-Decoders & Controllers Options

Type	Code	Description	Size (L x W x H)
DMX-Decoders	LT-903	3 channels output, up to 576W output power	4.80 × 4.33 × 1.46 in. (122 × 110 × 37 mm)
DMX-Decoders	LT-912	12 channels output, up to 1152W output power	7.09 × 4.80 × 1.54 in. (180 × 122 × 39 mm)
DMX-Decoders	LT-924	24 channels output, up to 1728W output power	11.81 × 4.80 × 1.54 in. (300 × 122 × 39 mm)
Controllers	DINA-DR micro	DMX 60 channels stand-alone controller with 10 scenes and USB programming	2.05 × 1.14 × 0.94 in. (52 × 29 × 24 mm)
Controllers	SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes	3.03 × 3.43 × 1.57 in. (77 × 87 × 40 mm)
Controllers	STICK-CW4	DMX 1024 channels controller with 36 scenes and 6 touch buttons	4.17 × 5.75 × 0.39 in. (106 × 146 × 10 mm)

Wiring Diagram

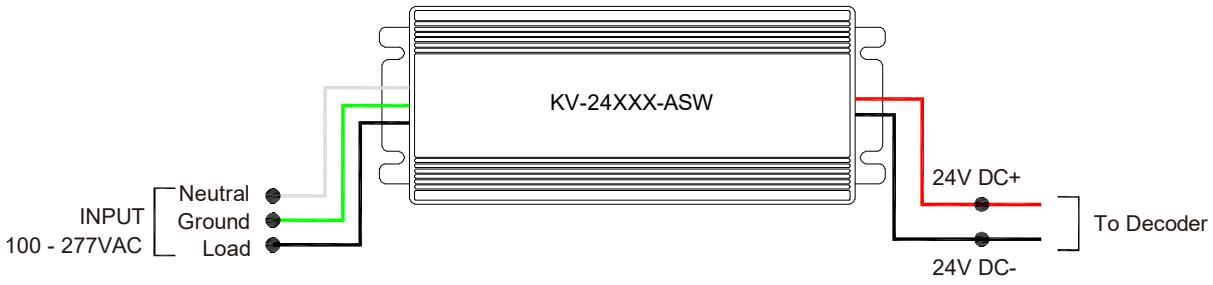

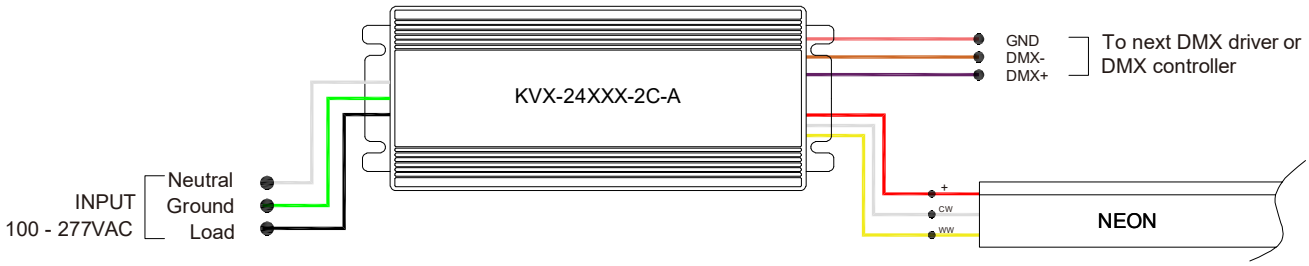

LINIO NEON 0612X SV TW

Outdoor · Horizontal Bending · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)